

# NORTH WIND PAVING

to serve

# RIDGE PORT ADDITION

## Phase 5

**NORTH WIND: From E.L. of Northshore Blvd. north and east to the east Line of the Plat.**

**CITY OF WICHITA, KANSAS**

**James L. Armour, P.E. Acting City Engineer**

**Project Number**

**472-83773**

**O.C.A. Number:**

**765889**

### GENERAL NOTES:

- Contractor will be required to provide notice to utility companies a minimum of twenty-four (24) hours prior to any excavation, as follows:  
Kansas One-Call 687-2470  
The Contractor must notify the following in case of an emergency:  
Cox Communications 262-4270  
Kansas Gas Service 1-888-482-4950  
Wester Energy 383-8650  
Aquila Energy 1-800-303-0357  
SBC 268-2245  
City of Wichita Water Dept. 268-4563  
City of Wichita Sewer Maint. 268-4024  
City of Wichita Storm Sewer Maint. 268-4090  
City of Wichita Traffic Maint. 268-4034  
Conoco Pipeline Co. 1-800-231-2551  
Southern Star Pipeline Co. 529-6600  
Phillips Pipeline Co. 1-800-766-8230
- Utility service lines, poles, valve boxes, meters, and etcetera are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
- Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance on site location. Locations, in the opinion of the Engineer, will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.
- Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor with the Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.
- The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws.
- The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days advance notice prior to start of construction.
- All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on-site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on-site engineer until project is accepted by City of Wichita. Maintenance and/or replacement of erosion control measures to be paid by L.S. bid item "Erosion Control BMP's."
- The contractor shall adjust valve boxes as necessary to match proposed grade. Cost to be included in bid item, "Site Clearing & Restoration."
- All areas disturbed during construction within Reserve "A" and within street R/W, adjacent to pavement, shall be seeded, mulched, and fertilized as follows unless otherwise noted (Permanent Seeding):  
Seed: Kansas Premium Fescue Blend: 8 lbs./1000 sq. ft.  
Mulch: Prairie Hay: 2 tons/acre  
Fertilizer: 12-24-12: 850 lbs./acre  
All other areas disturbed during construction shall be seeded and mulched as follows (Temporary Seeding):  
Seed: Rye Grass: 5 lbs./1000 Sq. Ft.  
Mulch: Prairie Hay: 2 tons/acre  
All costs associated with seeding, mulching, and fertilizing shall be included in bid item "Project Seeding." All seeding operations shall conform to City of Wichita Standard Specifications.
- All excess excavation shall be stockpiled or spread at a location determined by Baughman Co., P.A.
- The developer for this project is Jay Russell, 722-2417.

Scale: 1" = 150'


### BENCHMARKS:

"□" cut in south end of south curb return of Northshore Cir. and Northwind adjacent to Lot 55, Block 4, Ridge Port Addition.  
Elev. = 142.88 (City Datum)

"□" cut in southeast curb return of Northshore and Northwind adjacent to Lot 49, Block 6, Ridge Port Addition.  
Elev. = 141.33 (City Datum)


### SHEET INDEX:

Title Sheet	1
29' Pavement Detail	2
Street Sign Detail	3
North Wind	4
Earthwork Cross Sections	5
Erosion Control Details	6-9
Copy of Plat	10

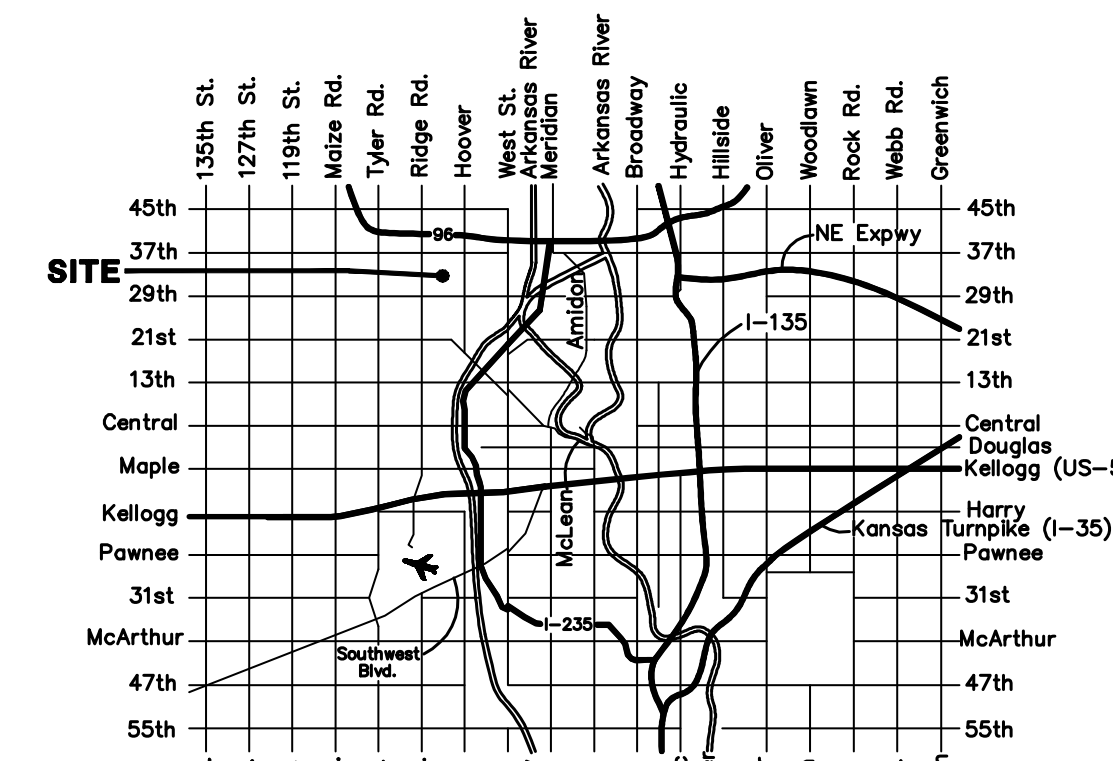

### Vicinity Map

**Benefit District:**



**Proposed Streets:**



**Project Earthwork Totals**  
Excavation = 929 C.Y.  
Loose Fill = 101 C.Y.  
Compacted Fill = 130 C.Y.

**Total Project Length**  
337 L.F. = 0.06 Miles



Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 F 316-262-7271 F 316-262-0149  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

