

BILL OF MATERIALS		
ITEM	UNIT	QUANTITY
POLE MOUNTED CONTROLLER & CABINET	EACH	-
PEDESTAL MOUNTED CONTROLLER & CABINET	EACH	-
PAD MOUNTED CONTROLLER & CABINET	EACH	1
TRAFFIC SIGNAL HEAD (SEE CHART A) W/ MOUNTING HARDWARE	EACH	8
TRAFFIC SIGNAL POLE (SEE CHART B) STEEL	EACH	4
TRAFFIC SIGNAL POLE (SEE CHART B) ALUMINUM	EACH	-
TRAFFIC SIGNAL PEDESTAL ALUMINUM 10"	EACH	-
PEDESTRIAN SIGNAL HEAD W/MOUNTING HARDWARE	EACH	8
CONCRETE CONTROLLER PAD	EACH	1
CONCRETE FOOTING - PEDESTAL	EACH	-
CONCRETE FOOTING - POLE	EACH	4
CONDUIT ELBOW 90°	EACH	As Req'd.
CONDUIT ELBOW 90° 3"	EACH	As Req'd.
BACK PLATE 5" - 3 SECTION	EACH	-
BACK PLATE 5" - 4 SECTION	EACH	-
BACK PLATE 5" - 5 SECTION	EACH	-
SERVICE BOX	EACH	4
JUNCTION BOX	EACH	5
GROUND ROD & CLAMP	EACH	6
CONDUIT CLAMP	EACH	As Req'd.
TRAFFIC SIGNAL LAMP 135 WATT	EACH	24
TRAFFIC SIGNAL LAMP 60 WATT	EACH	-
CLASS 4 - WOOD POLE	EACH	-
ENTRANCE HEAD	EACH	1
CIRCUIT BREAKER & BOX	EACH	1
GUY WIRE GUARD	EACH	-
GUY WIRE CLAMP	EACH	-
THIMBLE EYE ANCHOR ROD	EACH	-
PEDESTRIAN PUSHBUTTON W/SIGN	EACH	8
DETECTOR LOOP WIRE No. 14 A.W.G. 1/C (TYPE THHN)	LIN. FT.	2,980
LEAD-IN WIRE No. 6 A.W.G. 1/C (TYPE THHN)	LIN. FT.	60
MULTI-CONDUCTOR CABLE No. 14 A.W.G. 5/C	LIN. FT.	420
MULTI-CONDUCTOR CABLE No. 14 A.W.G. 7/C	LIN. FT.	750
SHIELDED DETECTOR LEAD-IN No. 14 A.W.G. 2/C	LIN. FT.	1,820
CONDUIT 3/4" (SEE CHART C)	LIN. FT.	540
CONDUIT 1" (SEE CHART C)	LIN. FT.	20
CONDUIT 1 1/4" (SEE CHART C)	LIN. FT.	230
CONDUIT 2" (SEE CHART C)	LIN. FT.	90
CONDUIT 3" (SEE CHART C)	LIN. FT.	310
STANDARD 1C #8 (GROUND)	LIN. FT.	330
TETHER WIRE 1/4" ASTM A475 SIEMENS-MARTIN	LIN. FT.	-
GRADE MIN.	LIN. FT.	-
STREET NAME SIGNS - SEE CHART D	EACH	4

- NOTES:**
- QUANTITIES ARE FOR INFORMATION ONLY. The contractor shall supply and install all necessary materials and equipment for the complete installation and operation of the traffic signal system whether specifically mentioned or not.
 - * Subscript "P" indicates programmed signals. Subscript "D" indicates dual-mode green/yellow arrow section.

CHART A SIGNAL INVENTORY				
NO. WAYS	NO. SECTIONS (Per Face)	SIGNAL FACE ARRANGEMENT	MOUNTING TYPE	QUANTITY
1	3	A	RIGID MAST ARM	8
2	2	L	SIDE-OF-POLE TYPE II	4

CHART B TRAFFIC SIGNAL POLES				
STATION, DIST. - SIDE	ARM SIZE	NO. OF SIGNALS ON ARM	SIGNAL SPACING	TYPE
14+54.4, 35.6' Lf	30	2	30 - 19	STD
14+58.7, 50.6' Rt	36	2	36 - 26	STD
15+33, 51.6' Lf	28	2	28 - 17	STD
15+38.8, 47.7' Rt	32	2	32 - 21	STD

CHART C		
CONDUIT SIZE	TRENCHED	PUSHED
3/4"	490'	
1"	10'	
1 1/4"	230'	
2"	90'	
3"		300'

CHART D STREET NAME SIGN SUMMARY	
LEGEND	SIZE
West	18"X60"
31st St	18"X60"



NOTE: A single conductor stranded No. 8 Green Wire shall carry the equipment ground from the grounding lug of all signal poles to the controller cabinet and the power disconnect box.

PAVEMENT MARKING QUANTITIES		
ITEMS	TOTAL	UNITS
PAVEMENT MARKING (PATTERNED COLD PLASTIC)(WHITE)(24")	420	LF
PAVEMENT MARKING (PATTERNED COLD PLASTIC)(WHITE)(12")	95	LF

SERVICE BOX SUMMARY	
STATION	DIST. - SIDE
14+75	29' Lf.
14+59.8	35' Rt.
15+31	45.5' Rt.
15+37.4	35.2' Lt.

JUNCTION BOX SUMMARY	
STATION	DIST. - SIDE
West St	
12.01	28' Rt.
13+59.5	28' Rt.
16+48	28' Lt.
17+98	28' Lt.
31st St	
11+59.6	27.5' Lf

- Type 170 Controller System to include:
- One (1) Model 170E controller unit complete with 470i - VOSHM with WAPITI 48A (or Latest Revisions) Port 1 & 2 - non-isolated full handshake, Ports 3 & 4 - High speed split isolated.
 - One (1) Model 332 Cabinet complete with all accessories & shall include:
 - One (1) Model 210ECL or 210MS Conflict Monitor with software.
 - Four (4) Model 430 Transfer Relays.
 - Two (2) Model 204 Flashing Units.
 - Eight (8) Model 200 Switch Packs.
 - Three (3) Model 242 DC Isolators.
 - One (1) Surge Arrester.
 - Eight (8) Model 222 (C-800) 2 Channel Loop Detectors
 - One (1) Stand alone 400 Modem. (Hayes Compatible)

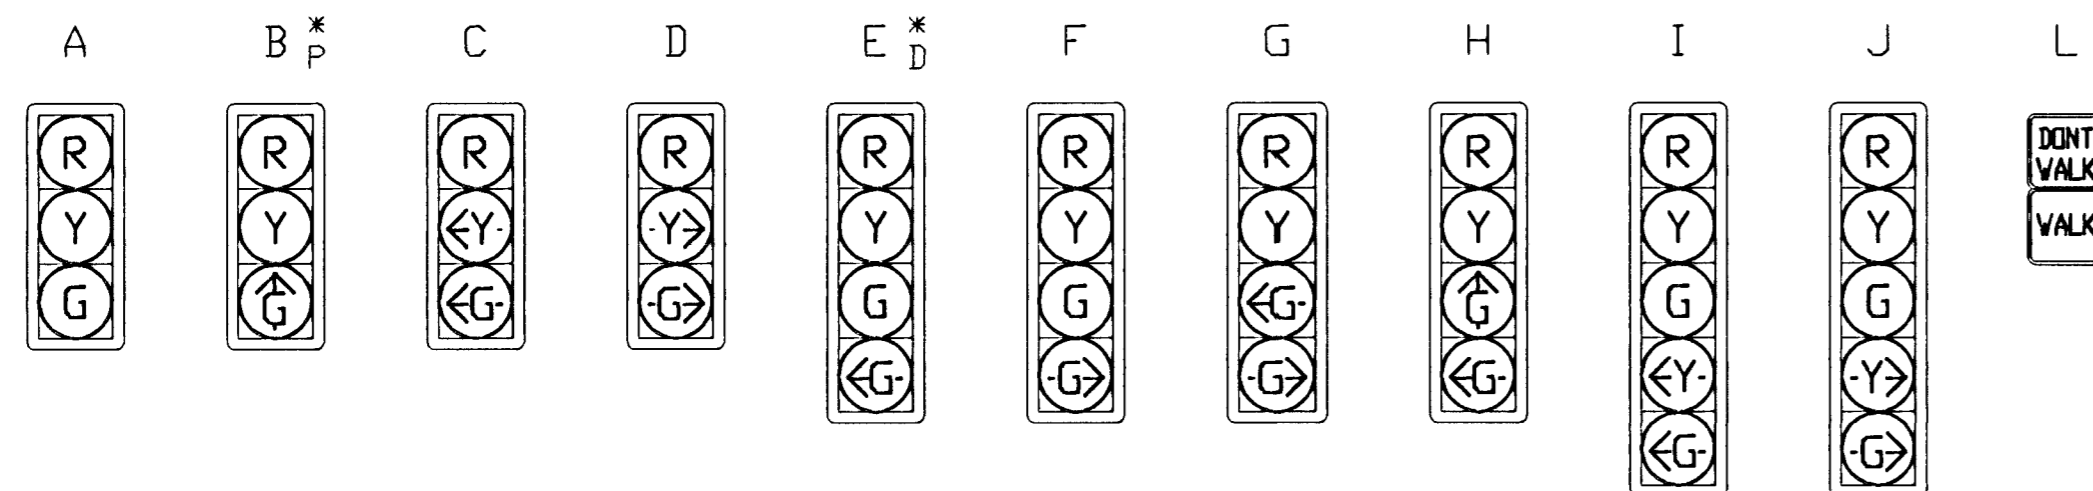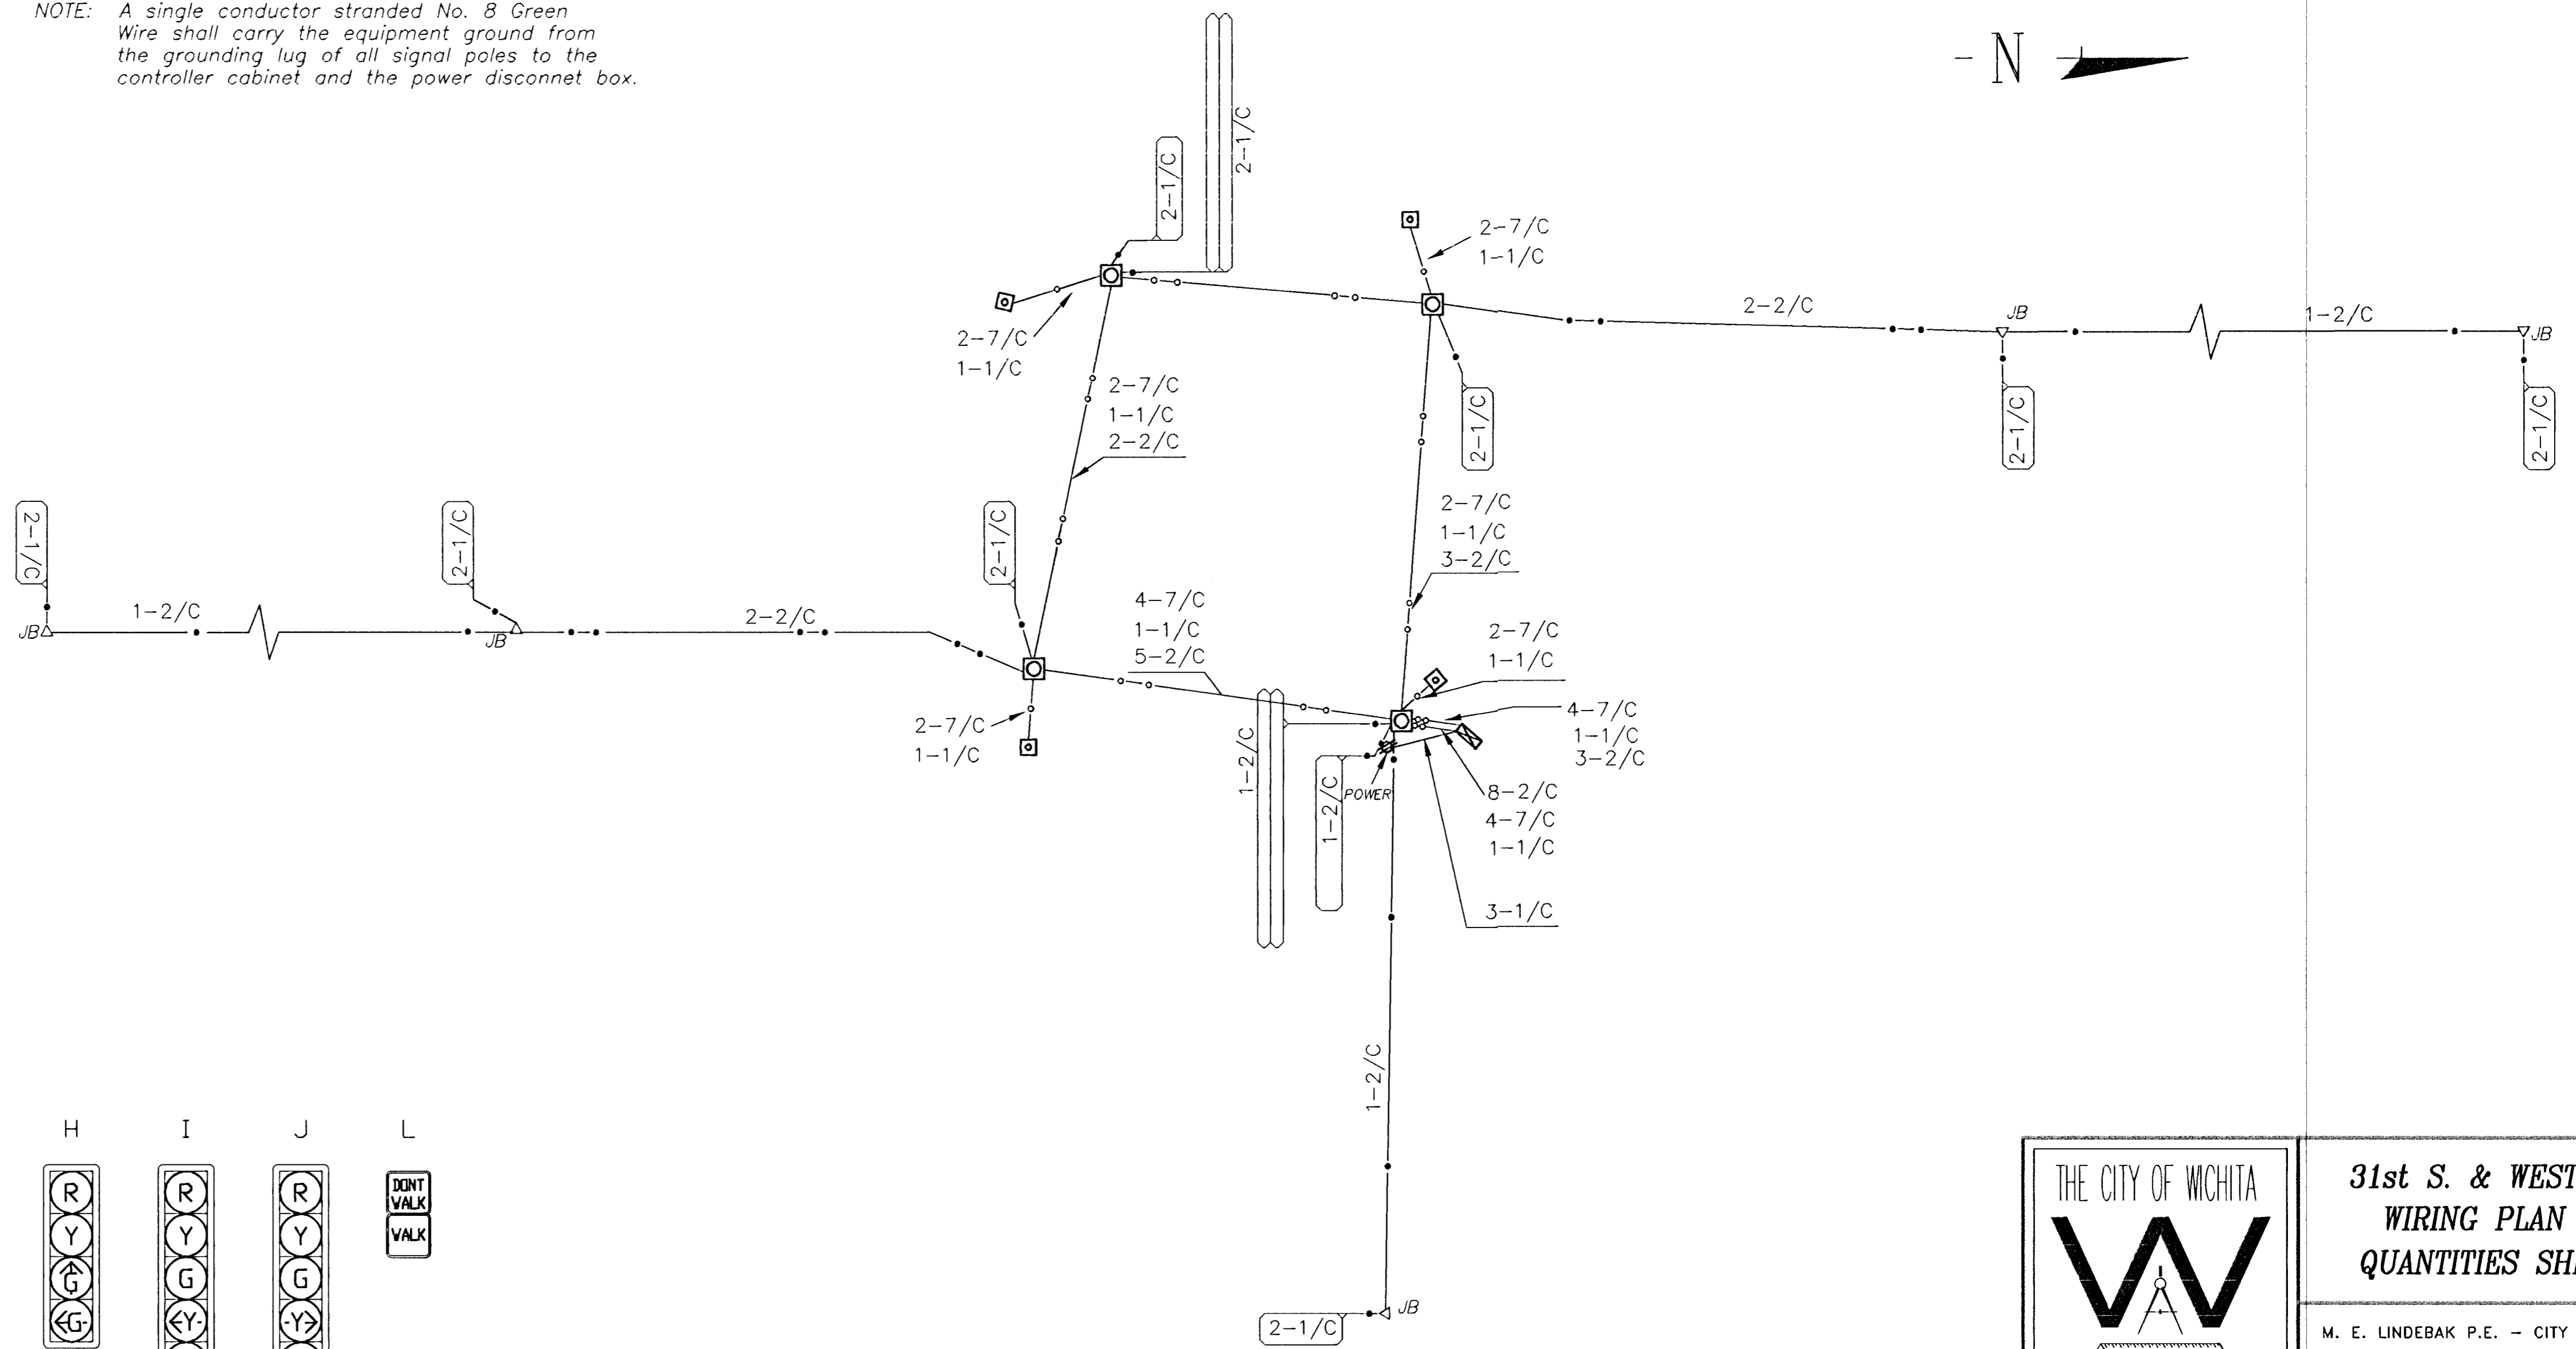

	31st S. & WEST St.	
	WIRING PLAN & QUANTITIES SHEET	
M. E. LINDEBAK P.E. - CITY ENGINEER		
PROJECT NUMBER	472-82858	INDEX CODE
DATE	JUNE 98	710210
SHEET 3 OF 7		