




Combined Curb & Gutter (6")

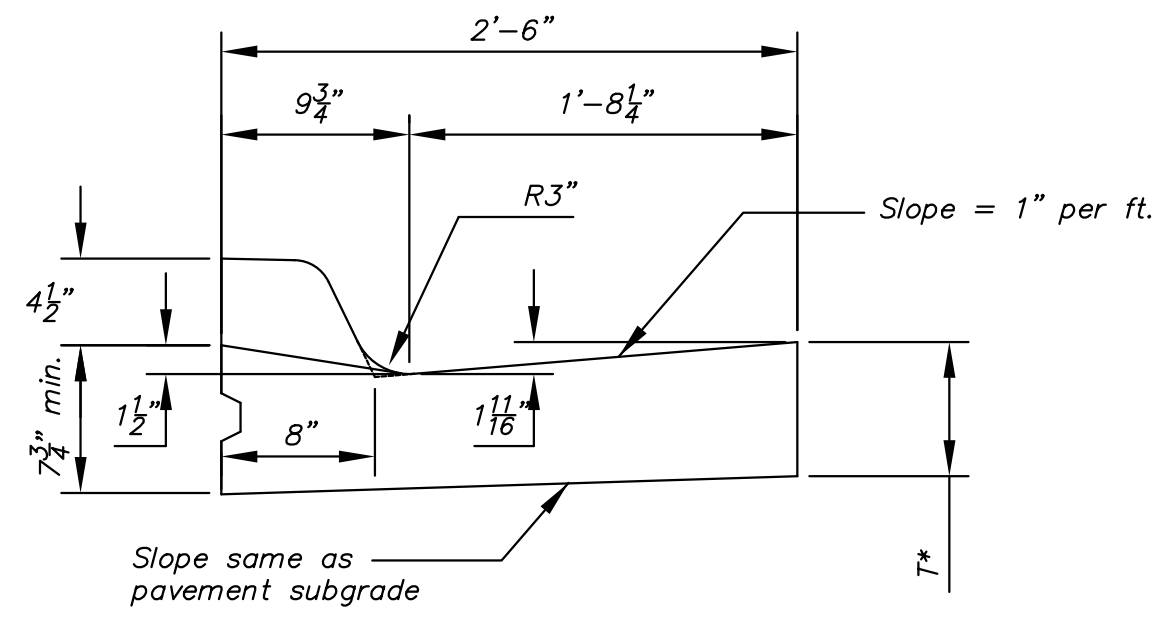


Combined Curb & Gutter (1 1/2")

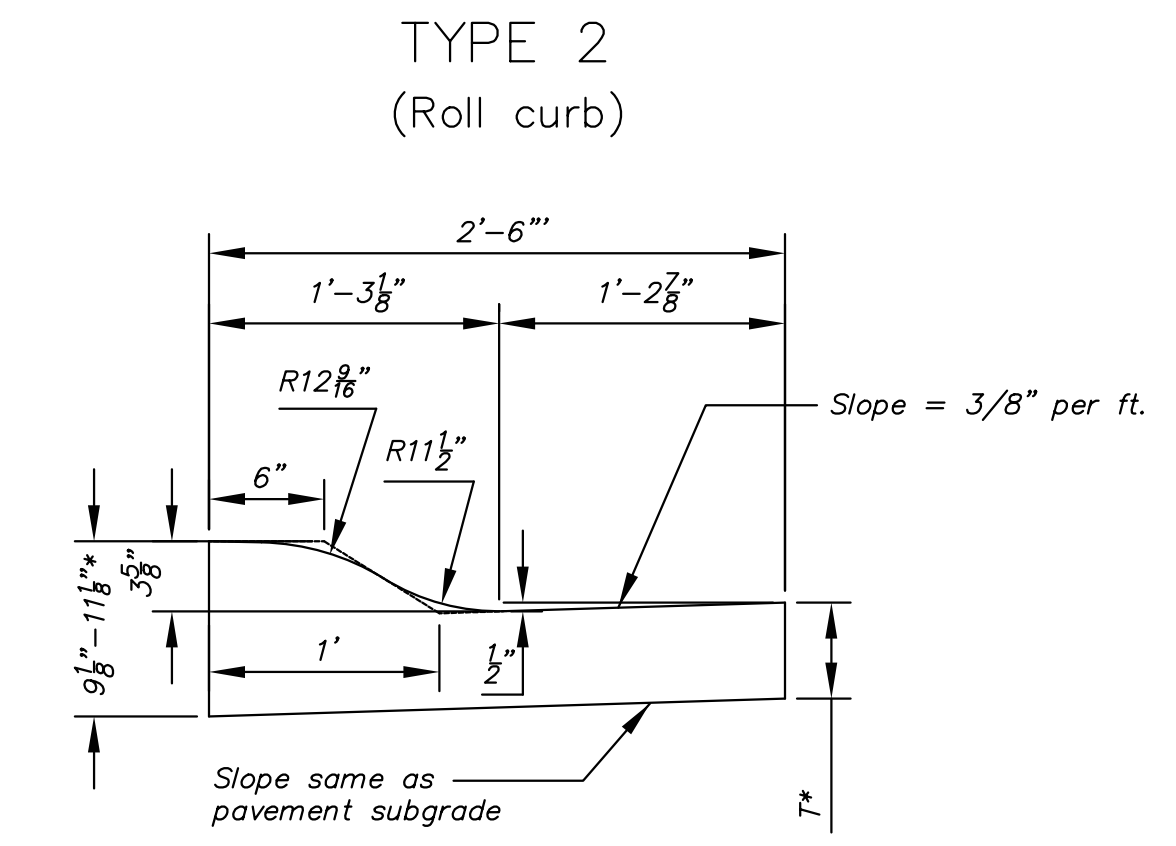


Combined Curb & Gutter (3 5/8")

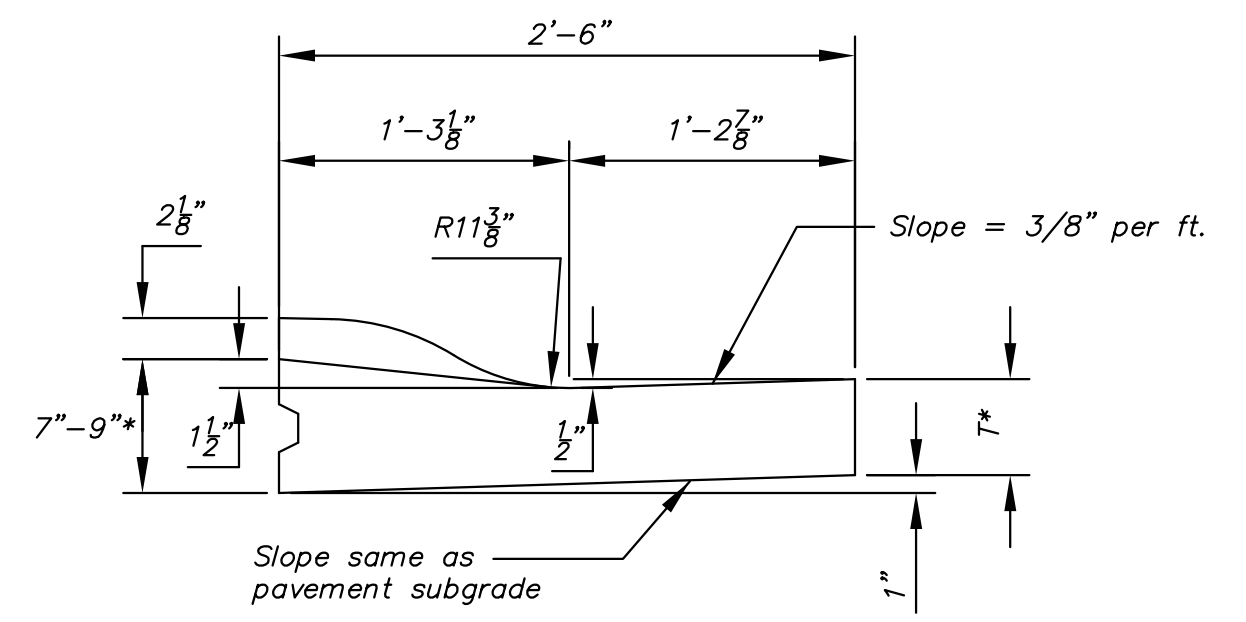


Combined Curb & Gutter (1 1/2")

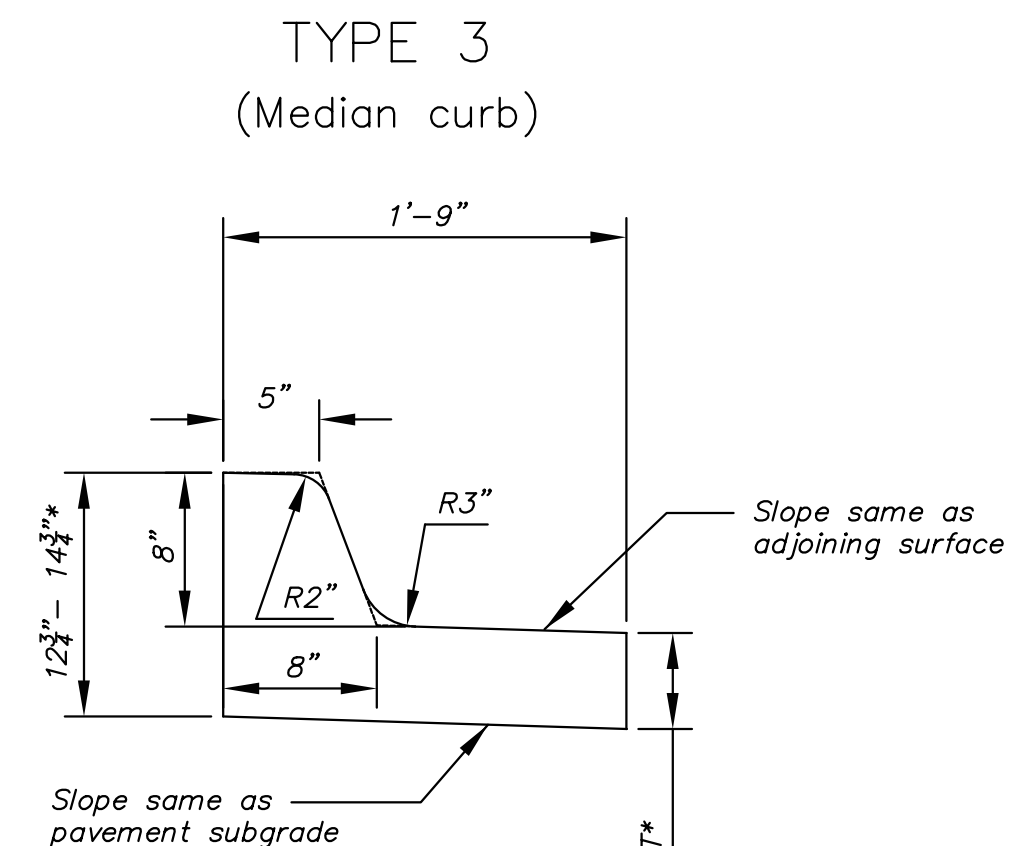


Combined Curb & Gutter (8")

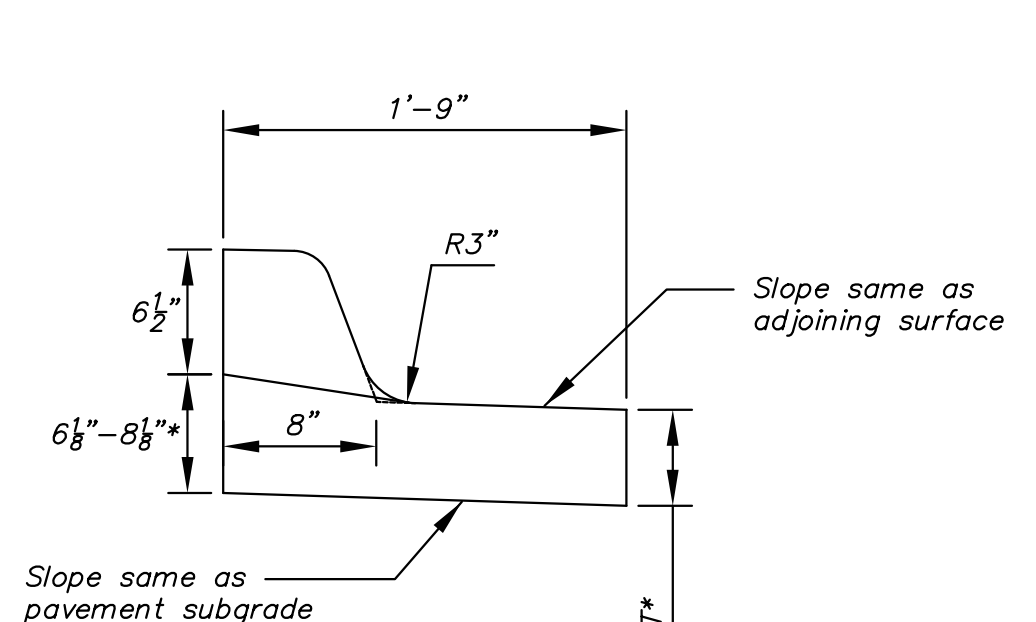

Combined Curb & Gutter (1 1/2")

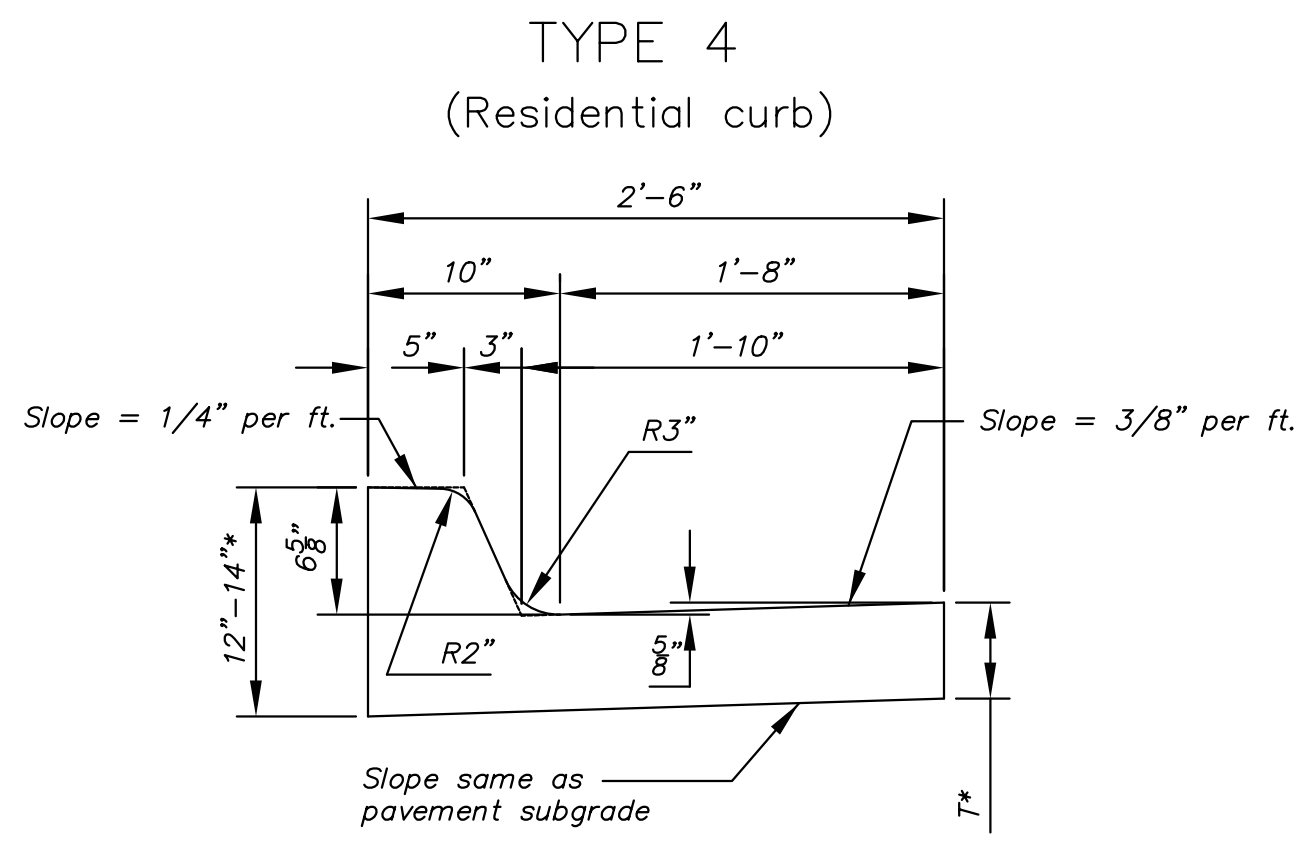

Combined Curb & Gutter (6 5/8")

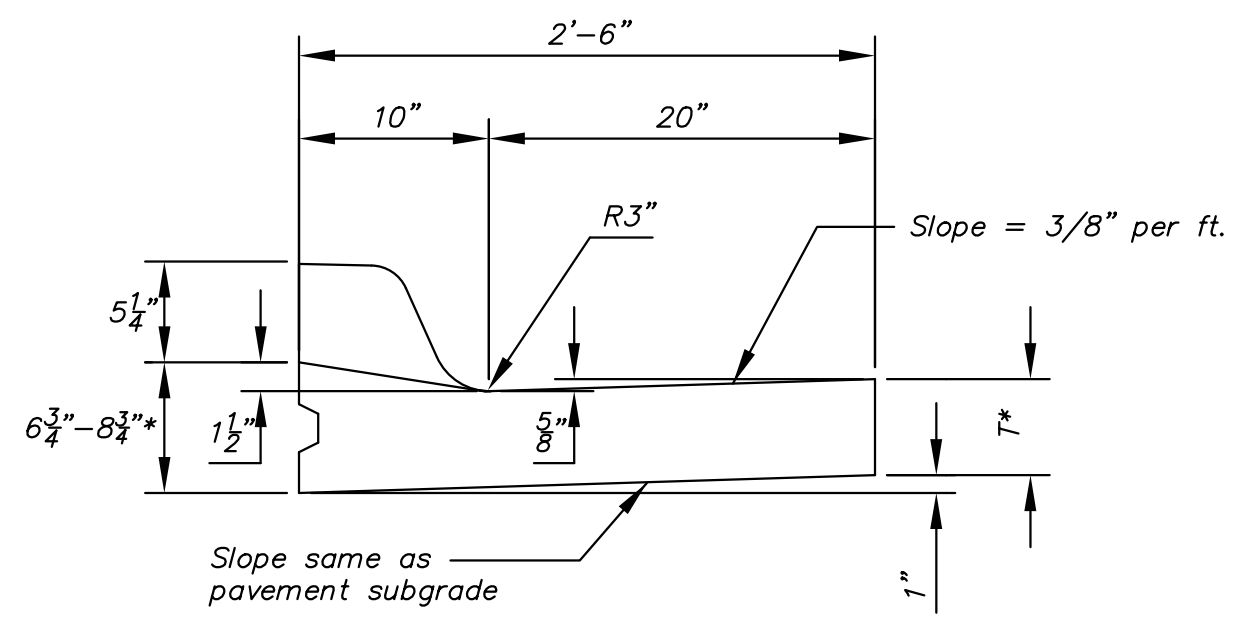


Combined Curb & Gutter (1 1/2")


T* = Thickness of curb to adjust with pavement thickness

GENERAL NOTES


- Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all Pls, PCs, cul-de-sac quadrants, and ends of returns.
- Contraction joints shall be constructed a minimum of 12' apart.
- Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.

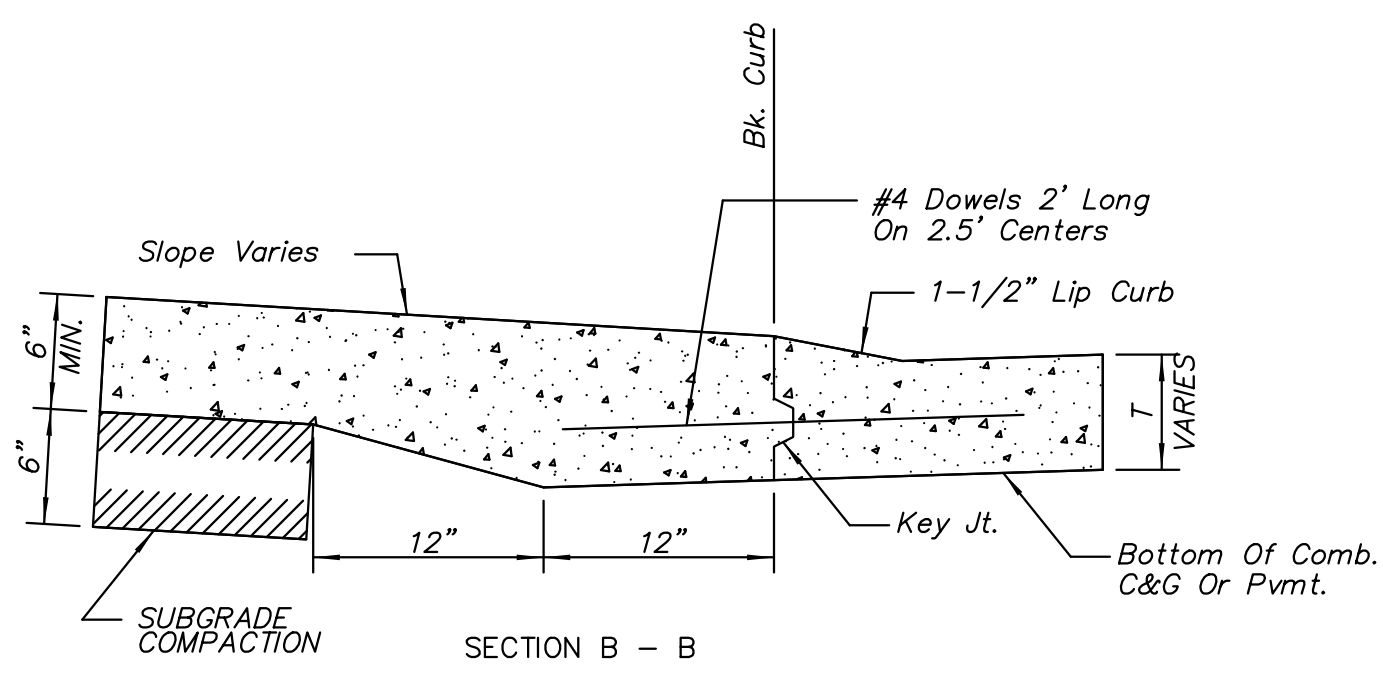


BACK OF CURB DETAIL

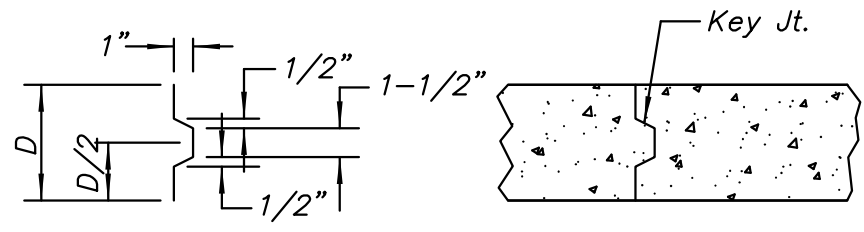

ALT. LONGITUDINAL CONSTRUCTION JOINT

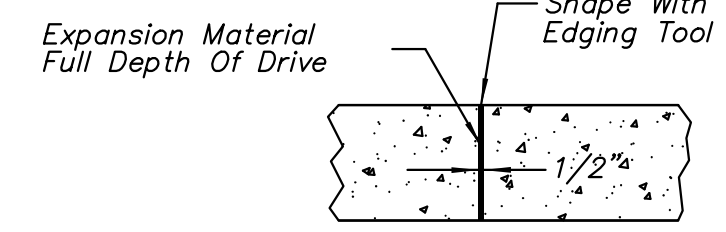


EXPANSION JOINT (E.J.)

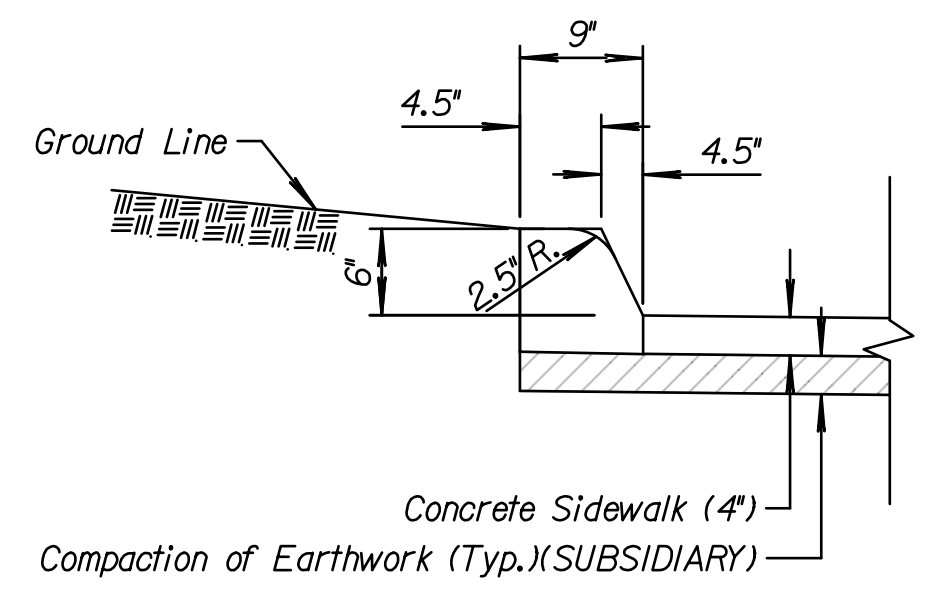

6" Edge Curb Detail

6" Edge Curb shall be paid for by the bid item "Concrete Edge Curb (6") and shall include all work, materials, labor and equipment necessary to complete this work. The edge curb may be placed monolithically with sidewalk. Joints from sidewalk shall be continued through edge curb and no other planes of weakness will be required. All exposed edges shall be finished with an edging tool. Edge curb shall have a 2.5' transition from sidewalk to full curb height at each end.

 CITY OF WICHITA PUBLIC WORKS & UTILITIES ENGINEERING DIVISION			REVISED: OCTOBER 2015 CURB & GUTTER & PAVING BRICK CROSSWALK DETAILS CITY ENGINEER GARY JANZEN, P.E.		
PROJECT NUMBER	OCA NUMBER	DATE			
87 N-0720-01		9/25/2023			
CITY ENGINEER'S OFFICE			SHEET		
CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501			123 OF 517		