


LEGEND



Proposed Sign

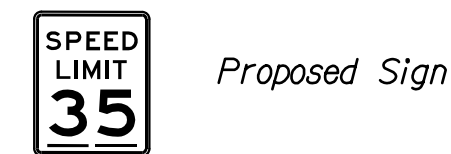

Existing Sign (To Be Removed)




Single Post Sign



Double Post Sign

SCALE: 1"=20'

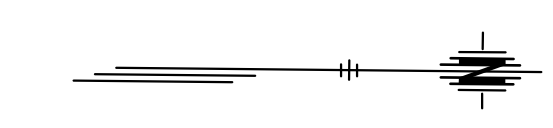

TRANSYSTEMS
 245 N. WACO
 SUITE 222
 WICHITA, KANSAS 67202
 MAIN: 316-303-3000
 FAX: 316-462-5629

CONSULTANTS:

WEST STREET IMPROVEMENTS
 FROM PAWNEE TO HARRY




REVISIONS:	MARK	DATE	DESCRIPTION

PROJ NO: 87 N-0720-01
 SCALE: 1"=20'
 DATE: 9/25/2023
 DESIGNED BY: DAN
 DRAWN BY: DAN
 CHECKED BY: MDB

SHEET TITLE:
 WEST STREET
 PAVEMENT MARKING
 & SIGNING PLAN
 STA. 89+50.00 TO
 STA. 91+25.00

SHEET NO.
 274

SHEET 274 OF 517

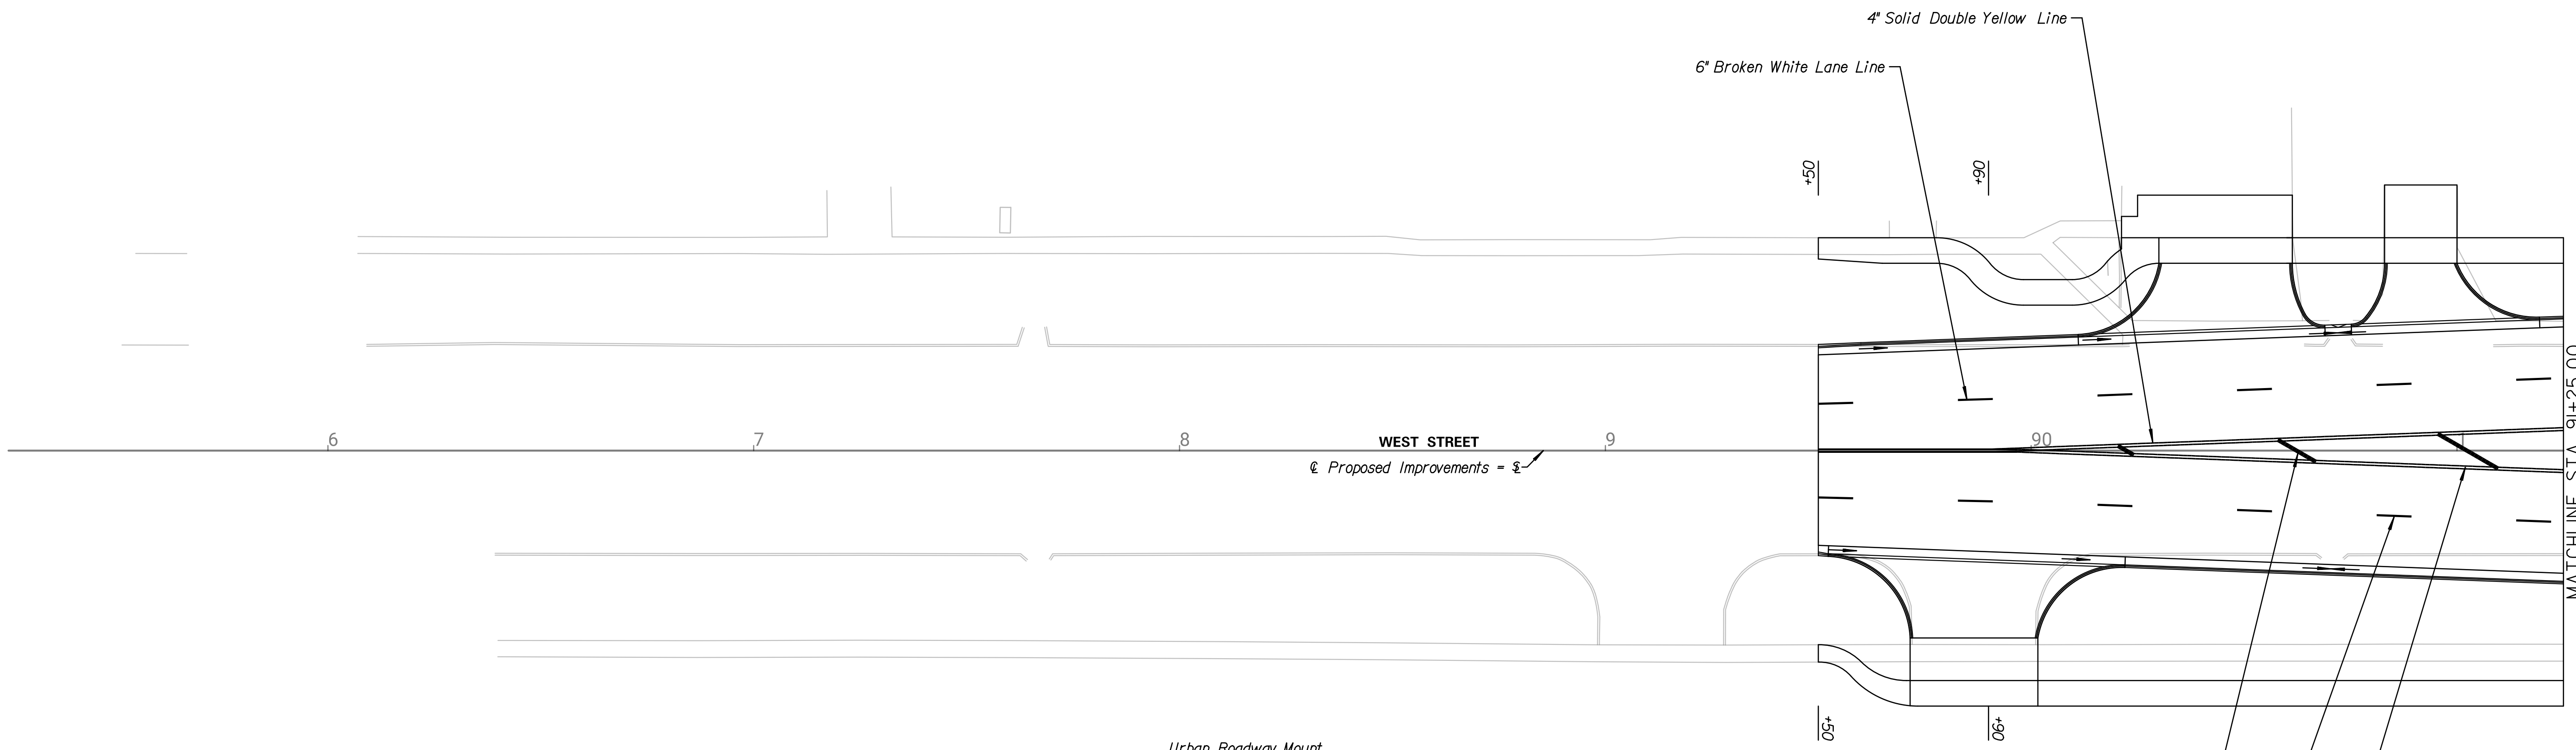

Urban Roadway Mount

URBAN:


1. Ground-mounted signs shall be mounted at a minimum height of 7' measured from the bottom of sign to the top edge of the curb.
2. Permanent sign supports should not be located on sidewalks or areas designated for future pedestrian or bicycle traffic.
3. The height from bottom of the secondary sign mounted below another sign may be 6' measured from the bottom of sign to the near edge of the pavement. Signs shall not overlap each other. Signs mounted lower than 7' should not project more than 4' into pedestrian facilities.

ADJUSTMENTS:


Signs may be moved laterally or longitudinally if it will improve the visibility of the sign or other signs and if it will protect the sign more.

See Standard Sheet TE407 for additional details.

*If the edge of a sign placed adjacent to a 10' sidewalk is at least 2'-0" from the edge of the sidewalk then the bottom of the sign may be placed 7'-0" higher than the edge of the sidewalk. If the edge of a sign placed adjacent to the 10' sidewalk is less than 2'-0" from the edge of the sidewalk then the bottom of the sign must be a minimum of 8'-6" higher than the edge of the future sidewalk.

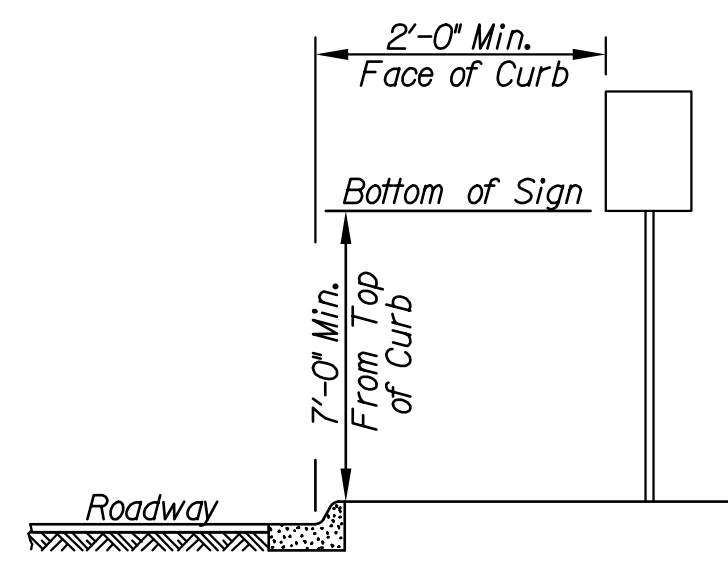

Sign Placement on Roadway Shoulder

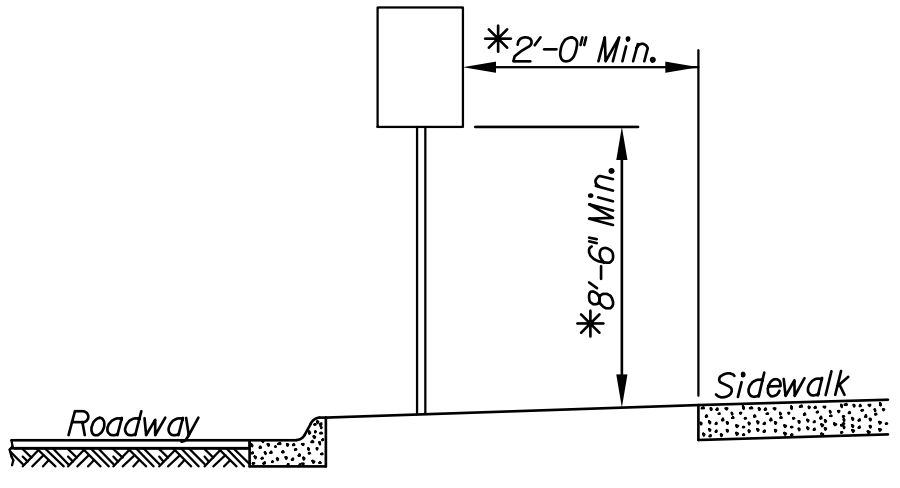

Sign Placement on Roadway Shoulder

9/25/2023 8:40:30 PM - c:\transystems\new_local\transystems\paw\1a_e\roads\0884549\C\PMK\101-101.DGN