

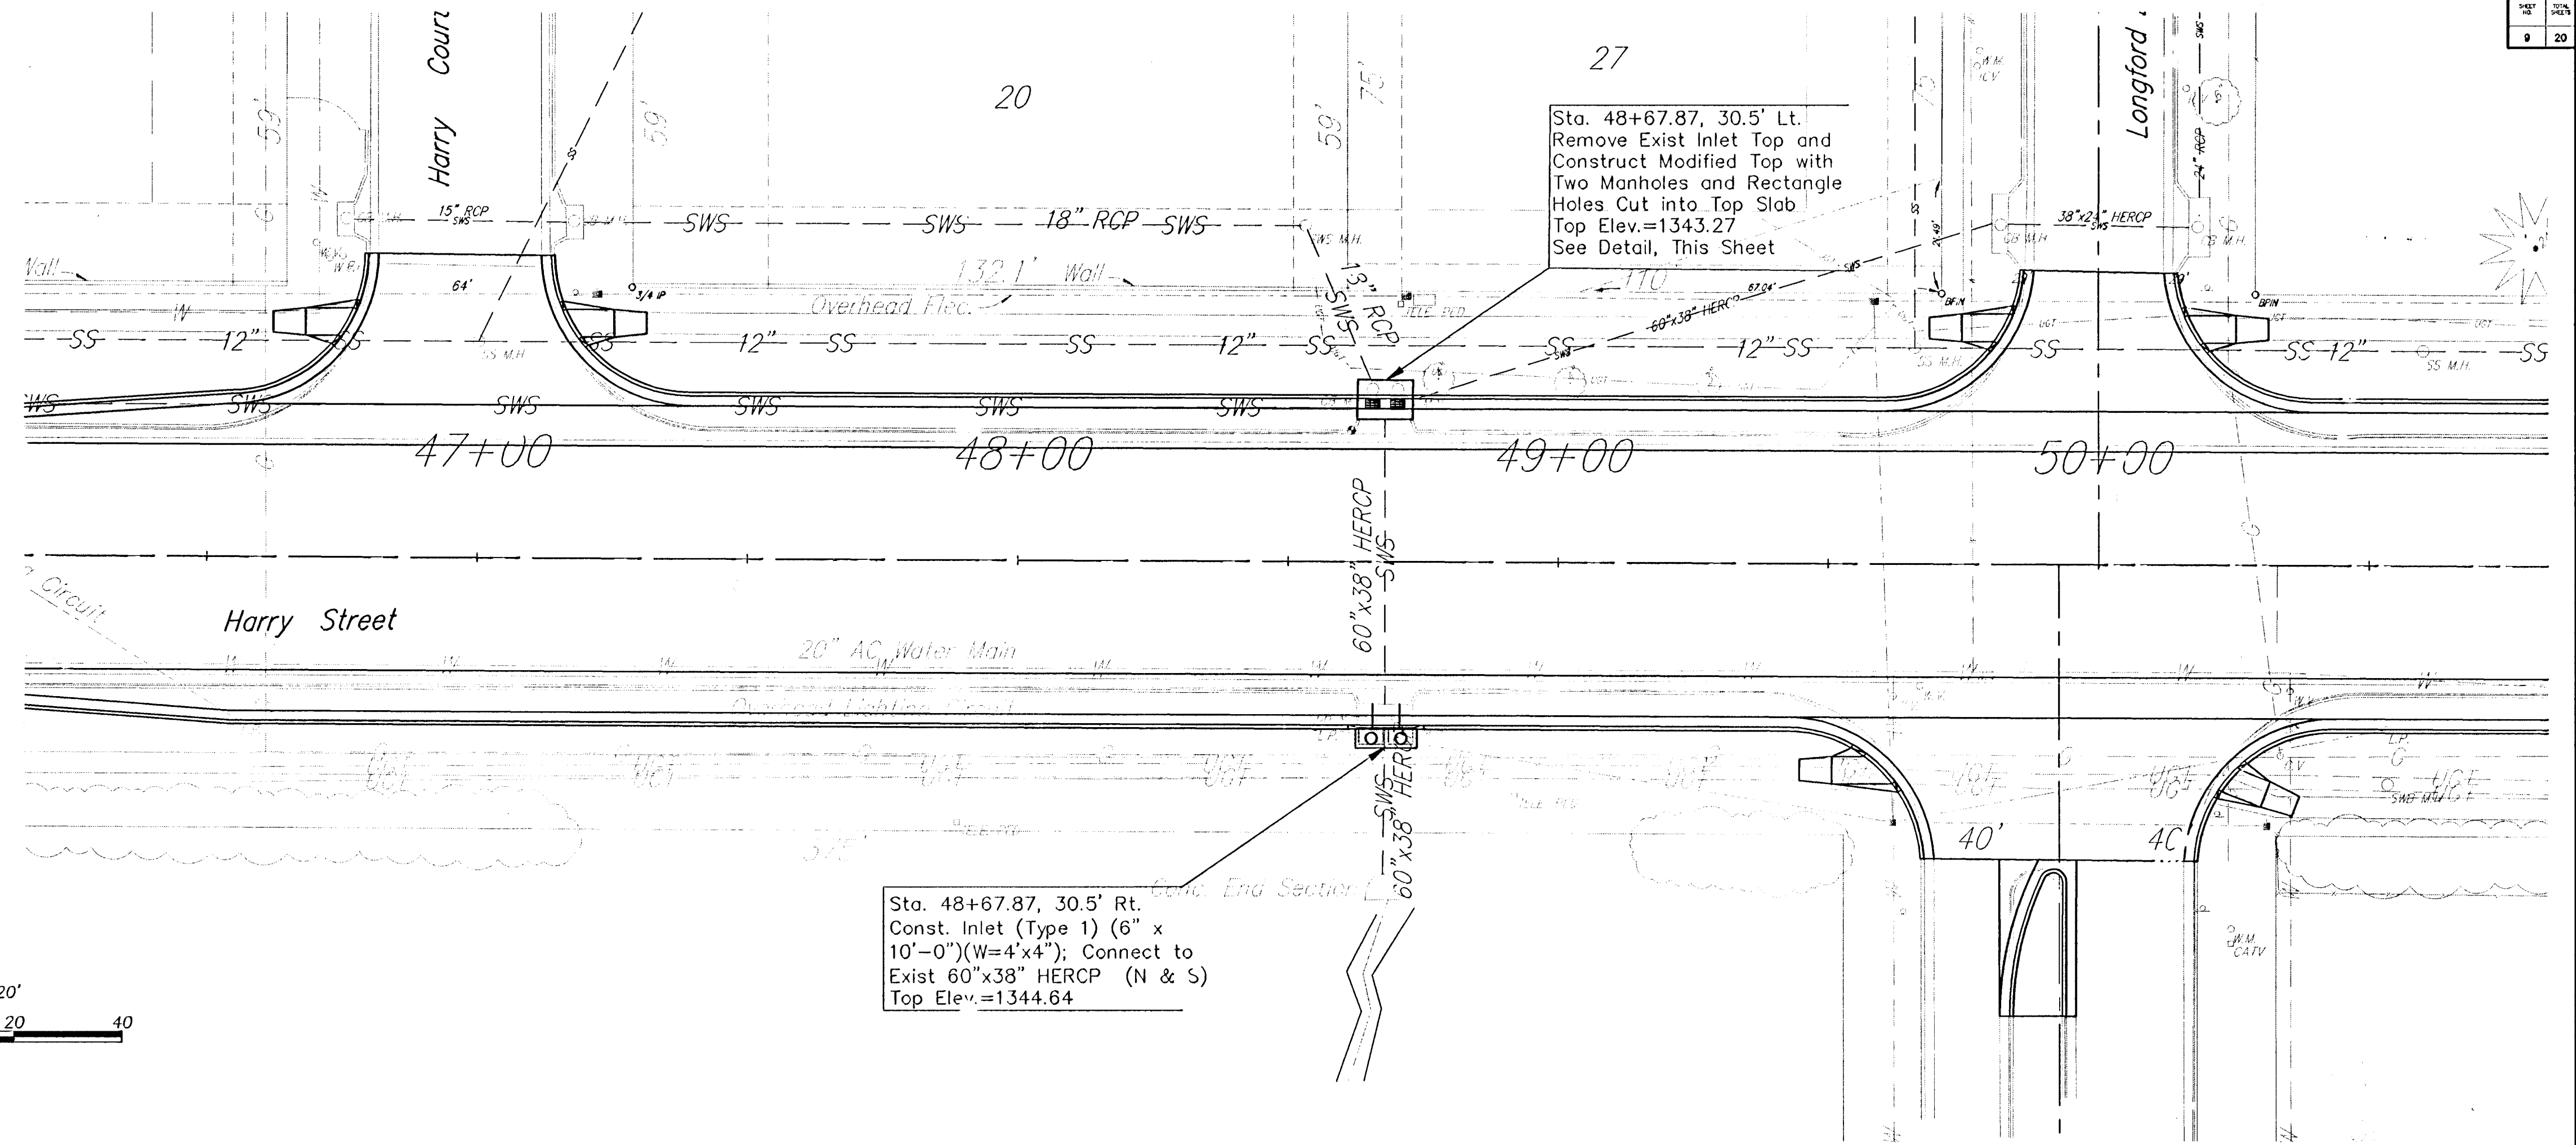
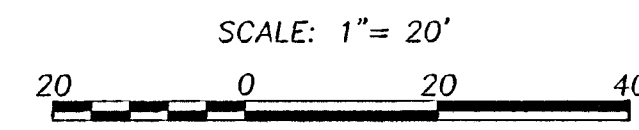


Use 11" Slab
 #5 @ 6" Both Ways (Bottom)
 #4 @ 12" Both Ways (Top)
 2" Clearance From All Outside Walls
 Add 2 Additional Like-Size Bars of
 Each Side of Holes/Square Cuts

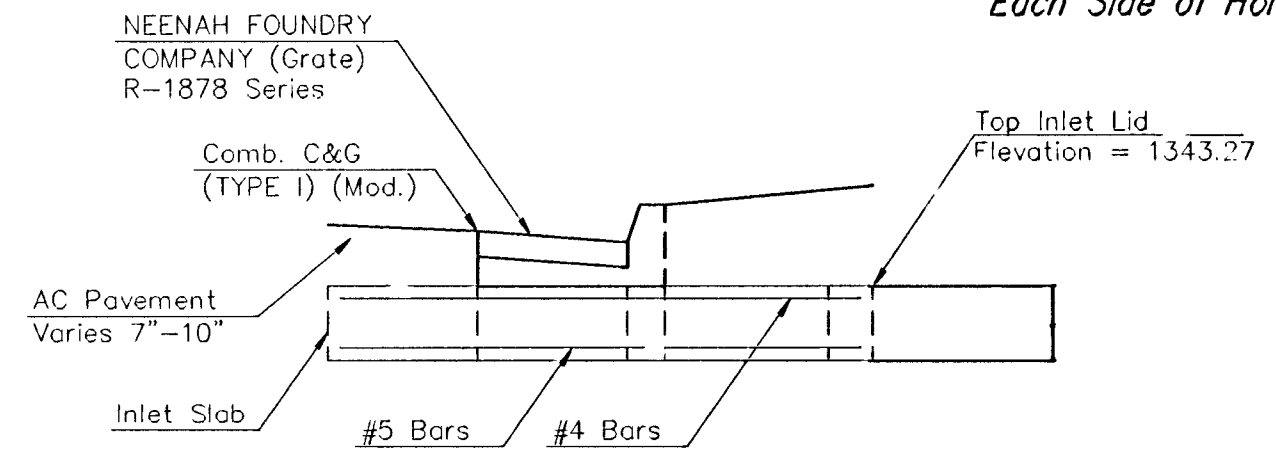

Sta. 48+67.87, 30.5' Lt.
 Remove Exist Inlet Top and
 Construct Modified Top with
 Two Manholes and Rectangle
 Holes Cut into Top Slab
 Top Elev.=1343.27
 See Detail, This Sheet

Sta. 48+67.87, 30.5' Rt.
 Const. Inlet (Type 1) (6" x
 10'-0") (W=4'x4"); Connect to
 Exist 60"x38" HERCP (N & S)
 Top Elev.=1344.64

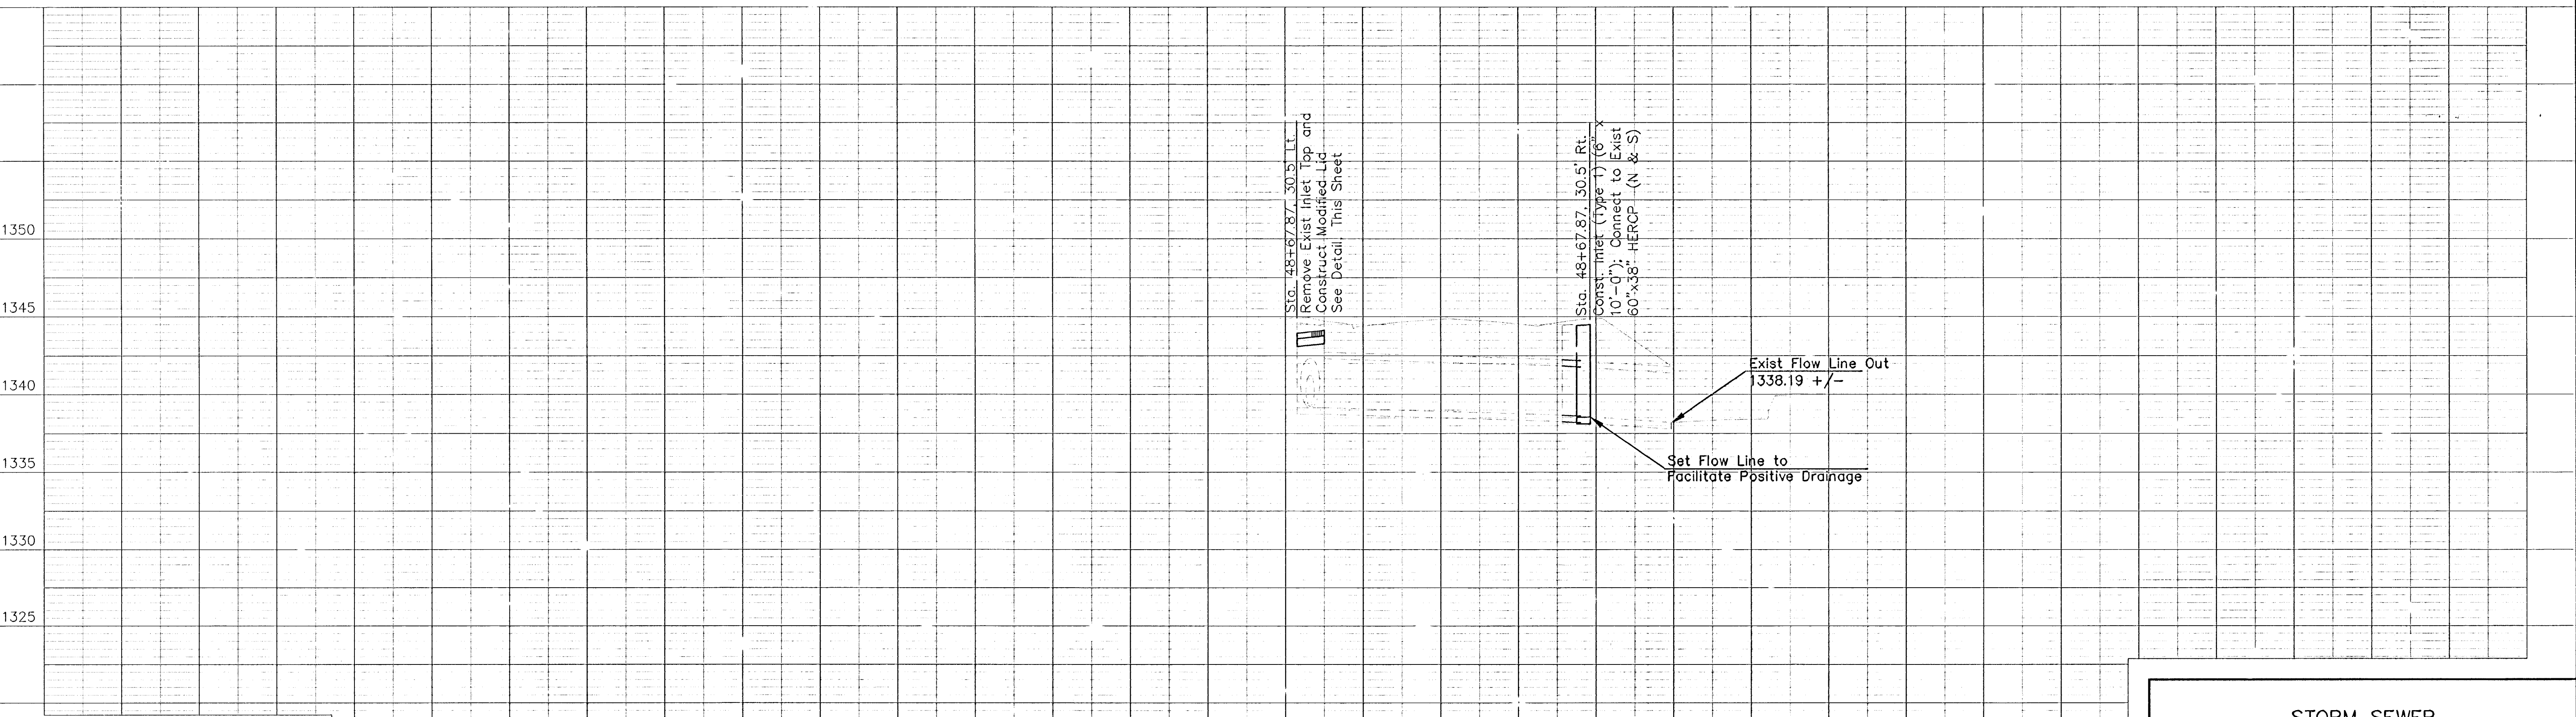

Sta. 48+67.87, 30.5' Lt.
 Remove Exist Inlet Top and
 Construct Modified Lid
 See Detail, This Sheet

Sta. 48+67.87, 30.5' Rt.
 Const. Inlet (Type 1) (6" x
 10'-0"); Connect to Exist
 60"x38" HERCP (N & S)

Exist Flow Line Out
 1338.19 +/-

Set Flow Line to
 Facilitate Positive Drainage

PROFILE

DATE	
BY	
REVISION	
NO.	

PROFILE

DATE	
BY	
REVISION	
NO.	

1" = 20'
 J:\2004\PROJ\04565\DWG\04565-SS01