

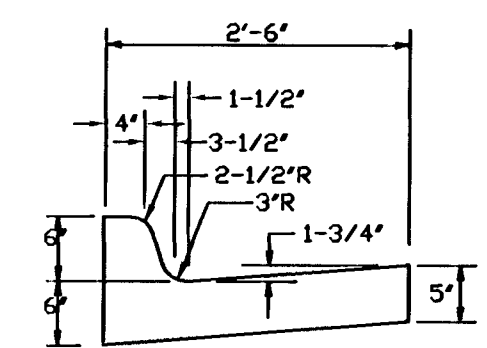



TYPICAL 29' B-B PAVEMENT DETAILS

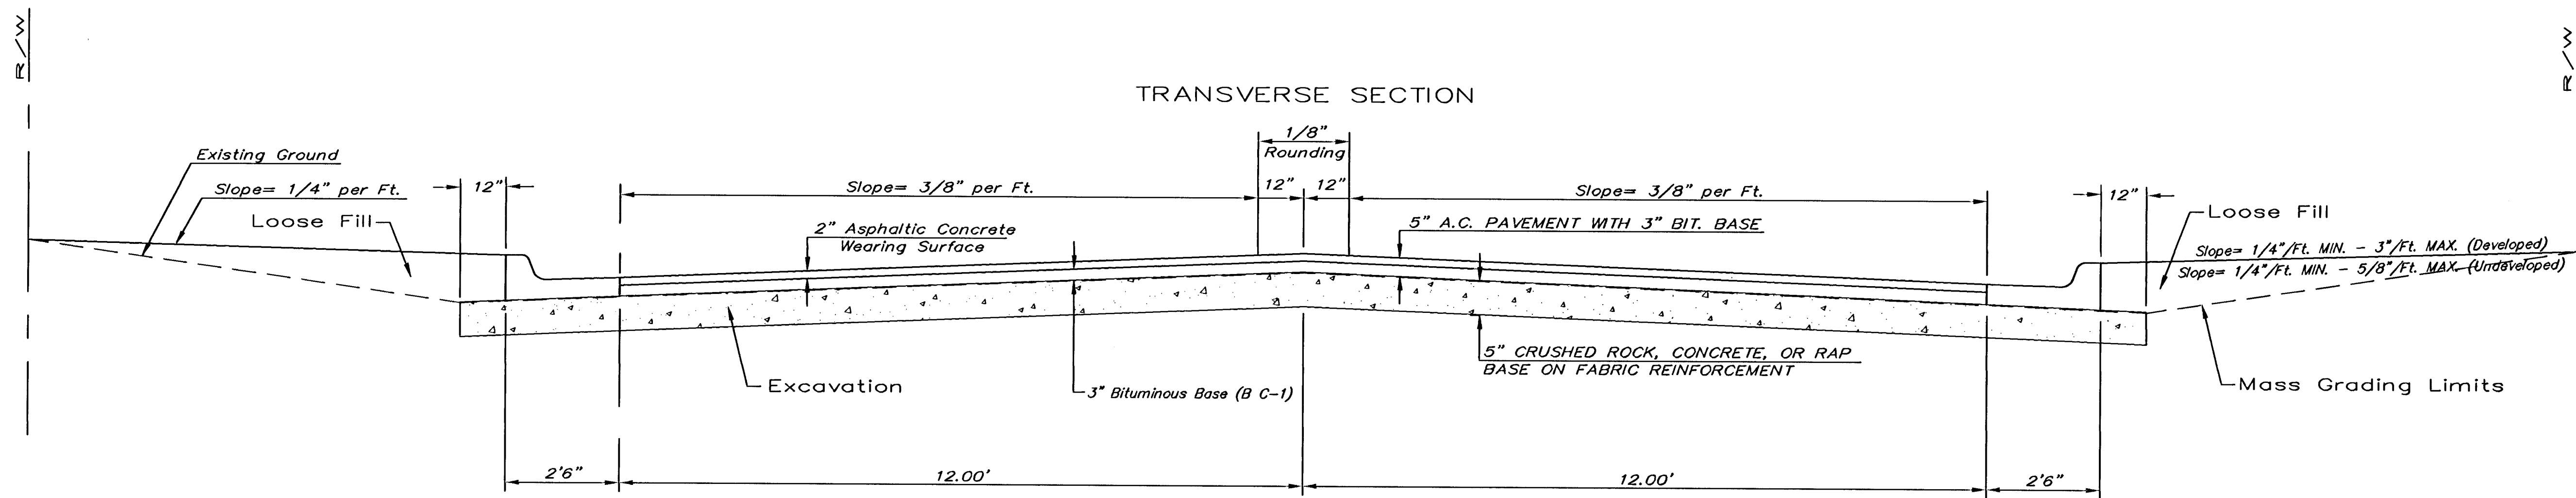


STATE CURB
MODIFIED TYPE I
COMBINED CURB & GUTTER

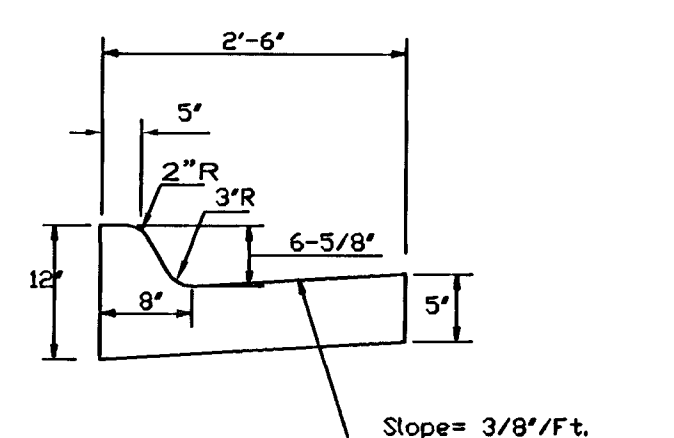


COMBINED CURB & GUTTER

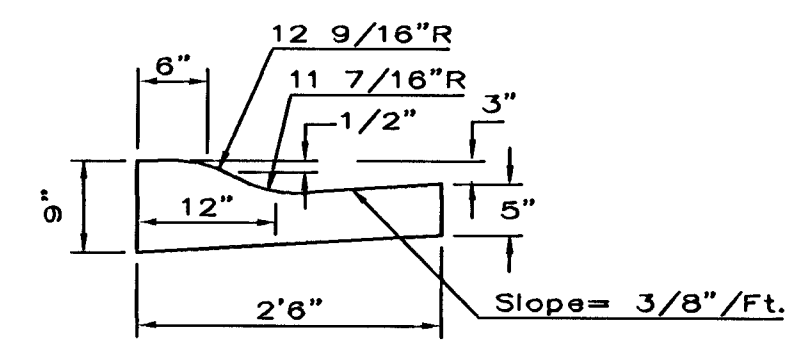

COMBINED ROLL TYPE CURB &
GUTTER

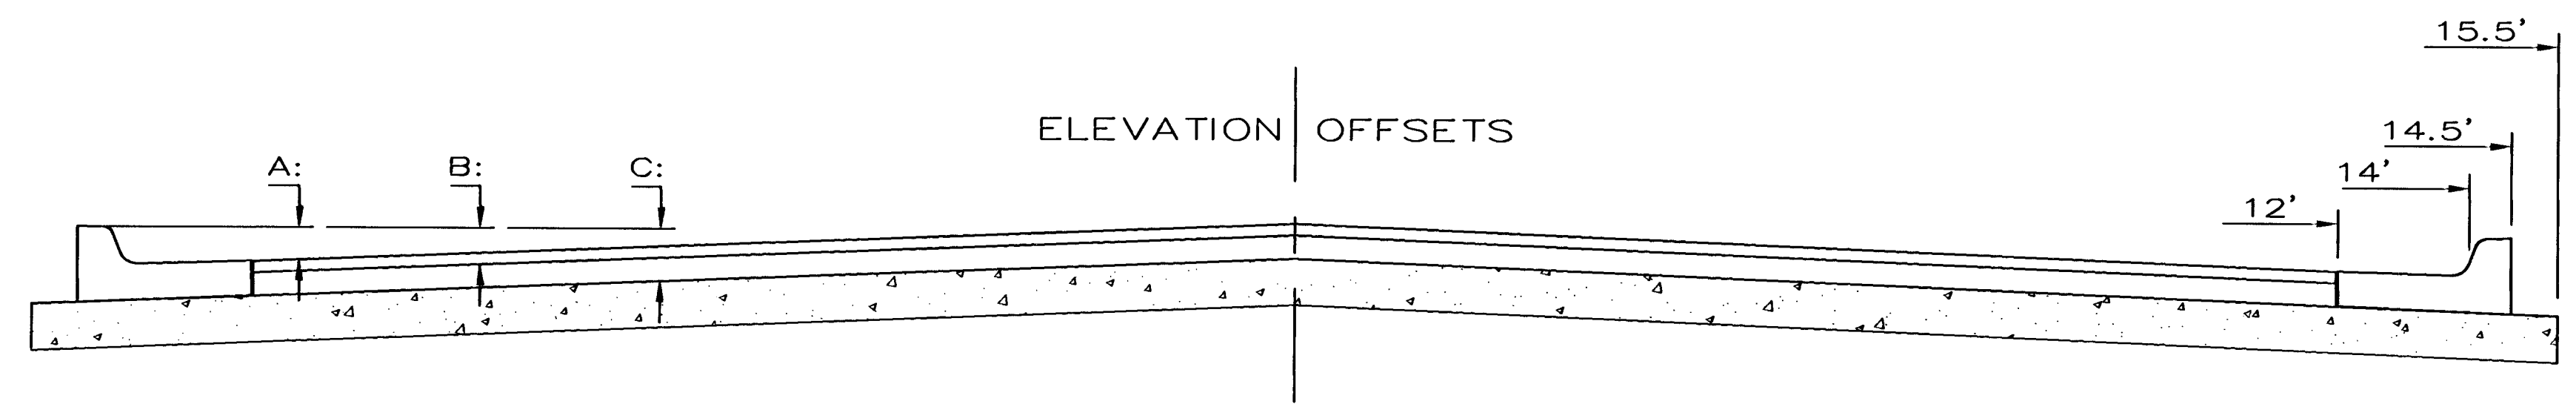

	DISTANCE FROM CENTERLINE (LT. & RT.)										
	0'	2'	4'	6'	7'	8'	10'	12'	14'	14.5'	15.5'
A: Top of Curbs to Top of Surface Lift	0.13	0.18	0.24	0.30	0.33	0.36	0.43	0.49	-	-	-
B: Top of Curbs to Top of Upper Base Lift	0.30	0.35	0.41	0.47	0.50	0.53	0.60	0.66	-	-	-
C: Top of Curbs to Top of C.R. Subgrade	0.55	0.60	0.66	0.72	0.75	0.78	0.85	0.91	0.97	0.98	1.01

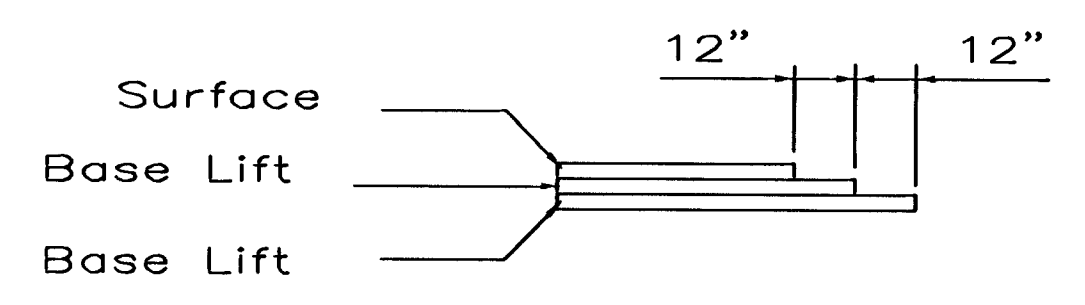

TRANSVERSE CONSTRUCTION
JOINTS

Transverse construction joints shall be constructed in flexible base pavements at locations where pavement joins existing flexible base pavement as shown by the detail. All costs associated with the construction of the transverse joint shall be included in the bid price for Square Yards 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE).

General Notes

FABRIC BASE REINFORCEMENT SHALL BE B X 1100 GEOGRID AS MANUFACTURED BY TENSAR CORPORATION OR APPROVED EQUAL. FABRIC BASE REINFORCEMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS. CRUSHED ROCK SHALL BE UNIFORMLY GRADED FROM 1-1/2" MAXIMUM SIZE TO NOT MORE THAN 10% PASSING A NO. 200 SIEVE. ROCK QUALITY SHALL BE THE SAME AS SPECIFIED FOR COARSE AGGREGATE FOR CONCRETE MIXES.


ROCK BASE IS TO BE COMPACTED AND SMOOTHED WITH A STEEL FACED ROLLER PRIOR TO PLACEMENT OF ASPHALT. TACK COAT WILL NOT BE APPLIED TO ROCK BASE.

A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.

CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.

THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARDS OF 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE).

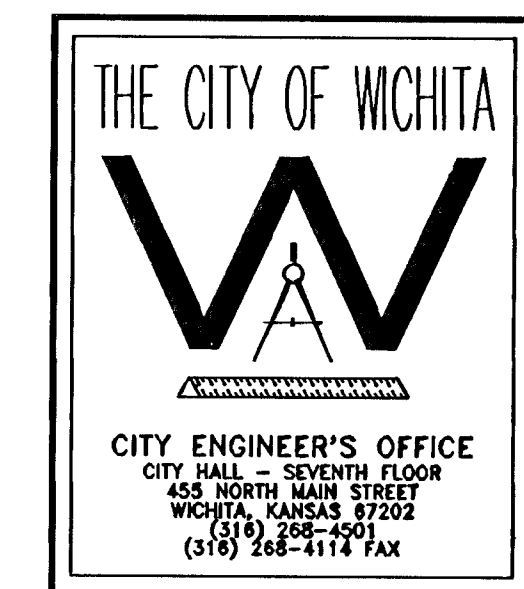

29' PAVEMENT 5" ASPHALTIC CONCRETE W/ CRUSHED ROCK BASE	
JAMES L. ARMOUR, P.E. - CITY ENGINEER	
PROJECT NUMBER 472-84328	OGA NO. 765974
DATE MAR 2003	Sheet 3 of 29

1:100
2: STANDARD
3: OPER. DEP.
4: STANDARD
5: OPER. DEP.
6: STANDARD
7: OPER. DEP.
8: STANDARD
9: OPER. DEP.
10: STANDARD
11: OPER. DEP.
12: STANDARD
13: OPER. DEP.
14: STANDARD
15: OPER. DEP.
16: STANDARD
17: OPER. DEP.
18: STANDARD
19: OPER. DEP.
20: STANDARD
21: OPER. DEP.
22: STANDARD
23: OPER. DEP.
24: STANDARD
25: OPER. DEP.
26: STANDARD
27: OPER. DEP.
28: STANDARD
29: OPER. DEP.
30: STANDARD
31: OPER. DEP.
32: STANDARD
33: OPER. DEP.
34: STANDARD
35: OPER. DEP.
36: STANDARD
37: OPER. DEP.
38: STANDARD
39: OPER. DEP.
40: STANDARD
41: OPER. DEP.
42: STANDARD
43: OPER. DEP.
44: STANDARD
45: OPER. DEP.
46: STANDARD
47: OPER. DEP.
48: STANDARD
49: OPER. DEP.
50: STANDARD
51: OPER. DEP.
52: STANDARD
53: OPER. DEP.
54: STANDARD
55: OPER. DEP.
56: STANDARD
57: OPER. DEP.
58: STANDARD
59: OPER. DEP.
60: STANDARD
61: OPER. DEP.
62: STANDARD
63: OPER. DEP.
64: STANDARD
65: OPER. DEP.
66: STANDARD
67: OPER. DEP.
68: STANDARD
69: OPER. DEP.
70: STANDARD
71: OPER. DEP.
72: STANDARD
73: OPER. DEP.
74: STANDARD
75: OPER. DEP.
76: STANDARD
77: OPER. DEP.
78: STANDARD
79: OPER. DEP.
80: STANDARD
81: OPER. DEP.
82: STANDARD
83: OPER. DEP.
84: STANDARD
85: OPER. DEP.
86: STANDARD
87: OPER. DEP.
88: STANDARD
89: OPER. DEP.
90: STANDARD
91: OPER. DEP.
92: STANDARD
93: OPER. DEP.
94: STANDARD
95: OPER. DEP.
96: STANDARD
97: OPER. DEP.
98: STANDARD
99: OPER. DEP.
100: STANDARD

\\CWA\044529\dwg\pav\phase 1\044529D1.DWG