


WESTLINK AREA SANITARY SEWER IMPROVEMENTS

PHASE 1

OCA # 624102 / 468-84837

<u>SITE</u>	<u>GENERAL LOCATION</u>	<u>PIPE SIZE</u>	<u>UPSTREAM MANHOLE</u>	<u>DOWNSTREAM MANHOLE</u>	<u>UPSTREAM INVERT ELEVATION</u>	<u>DOWNSTREAM INVERT ELEVATION</u>	<u>LENGTH (FT.)</u>
1	Easement east of Chipper, south of Murdock Easement west of Maus Lane, south of Murdock	8" 8" 8"	4848-376 4848-378 4848-377	4848-375 4848-374 4848-375	Point Repair & Manhole Work 1327.31 Manhole Work	1327.15	40
2	Easement between Westlink and Murray, from south of 9th Street to Murdock	8"	4848-336 4848-335 4848-335	4848-334	Manhole Work Manhole Work Point Repair		
3	Easement south of 10th Street North, west of Waddington	8"	4848-186	4848-185	1328.57	1327.64	234
4	Easement north of 10th Street North, between Wood and Waddington	8"	4848-181	4848-180	1329.94	1328.75	300
						Total liner feet =	----- 574

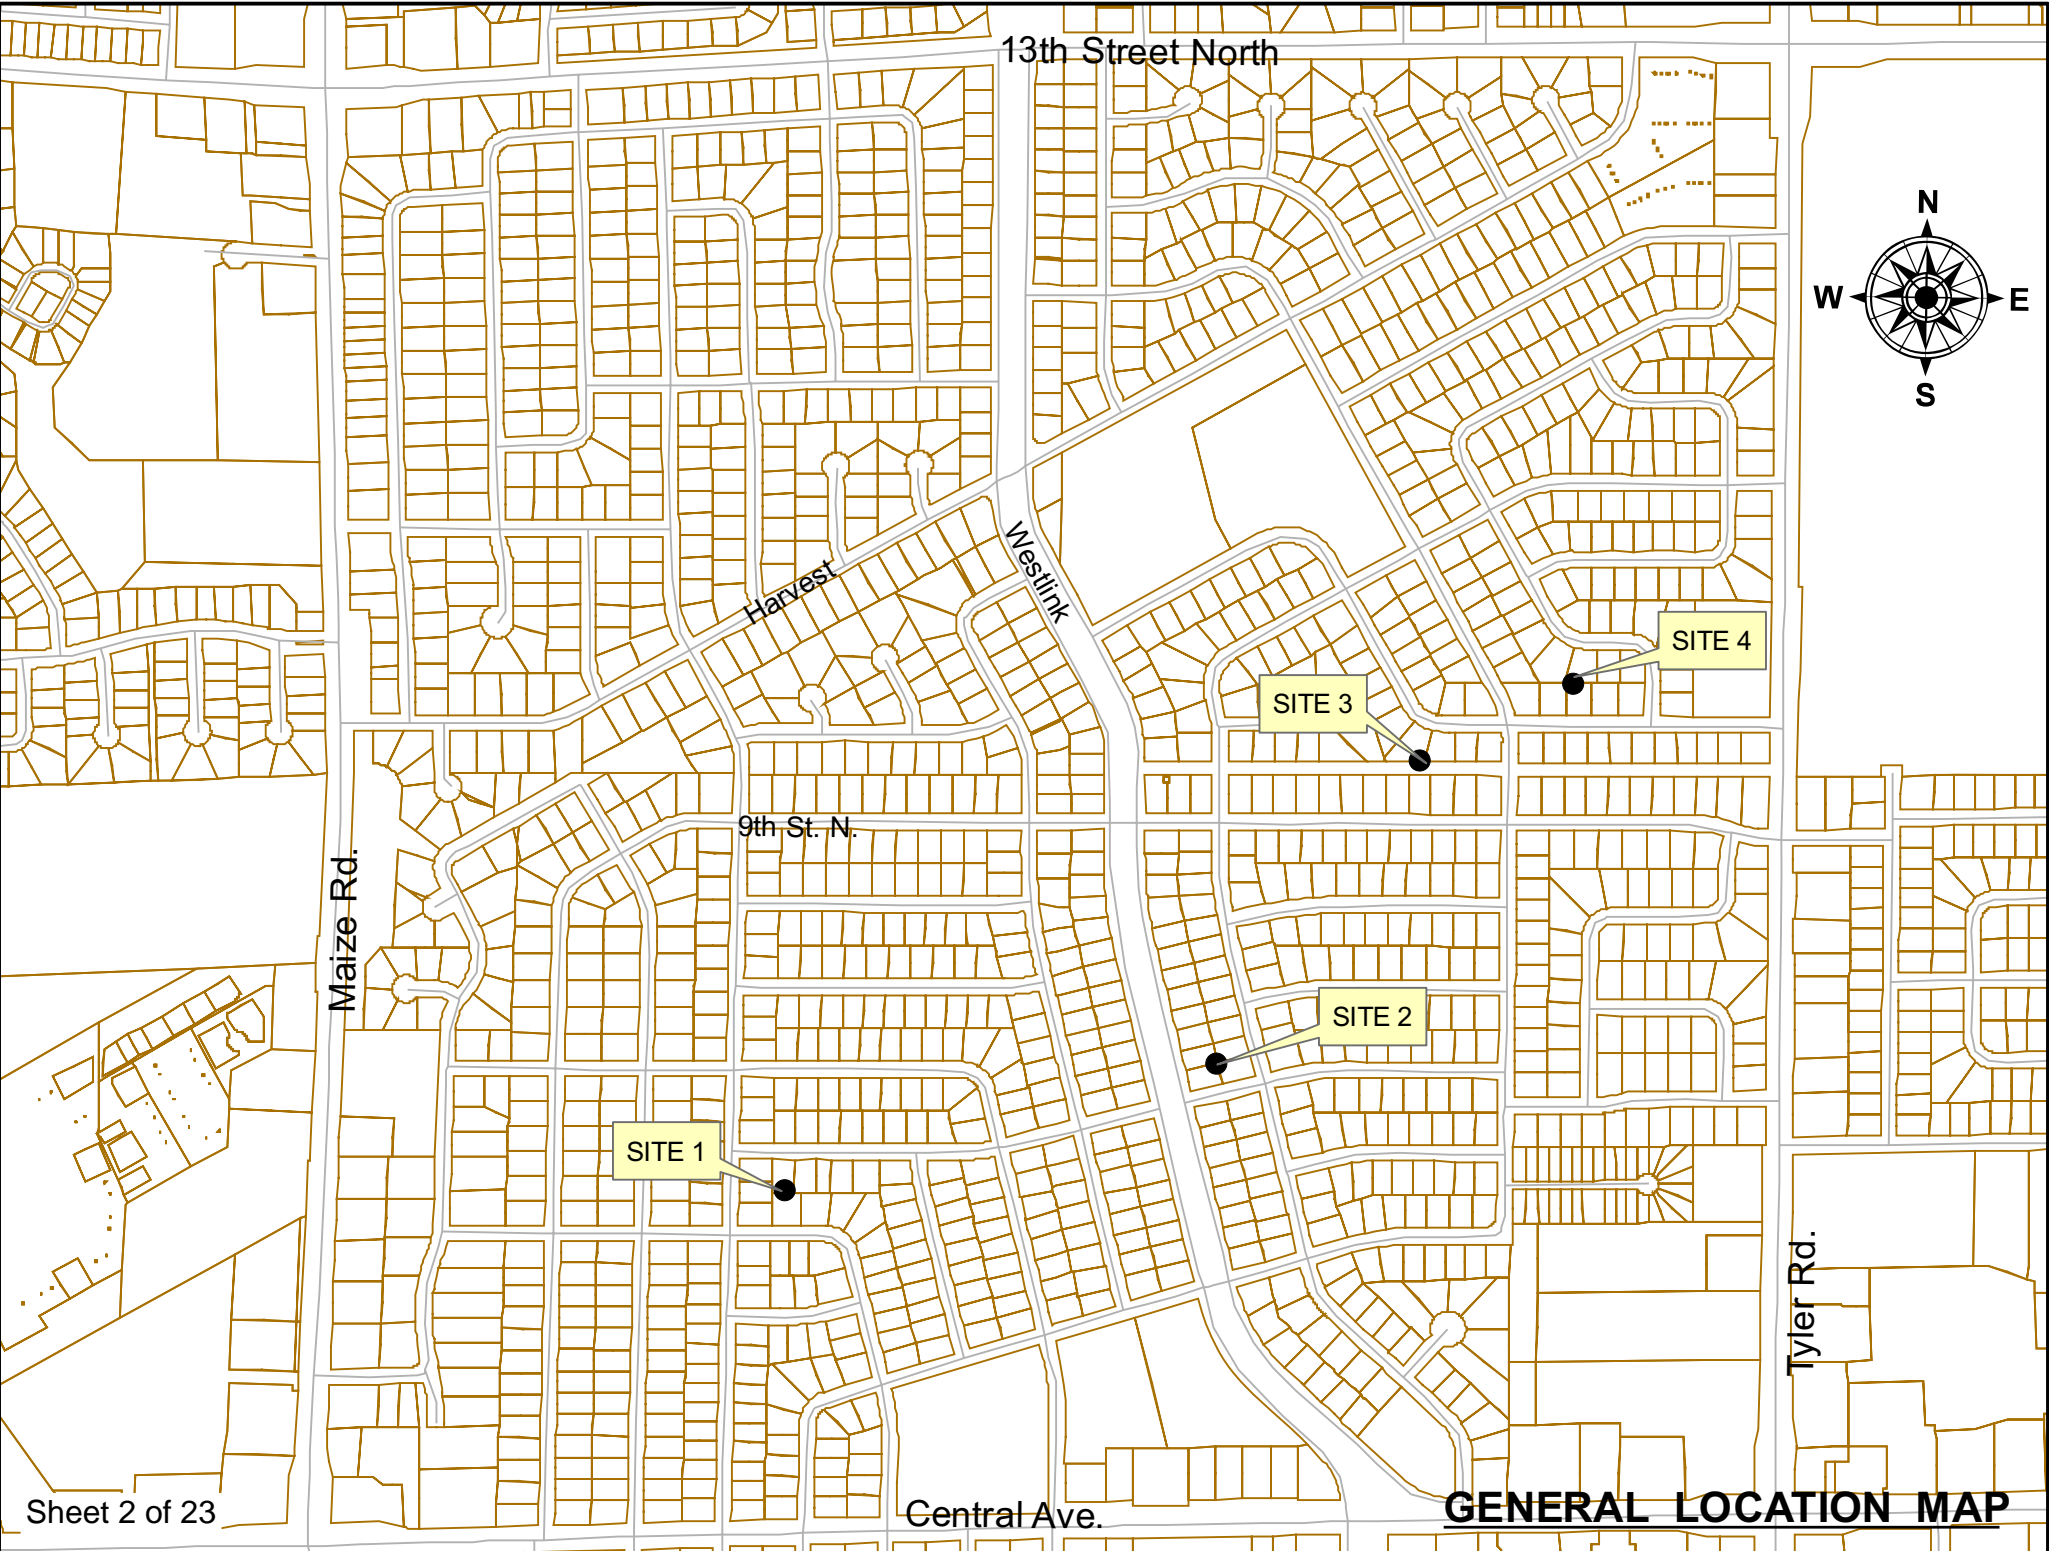

Bid Items by Site Reference

Westlink Area Sanitary Sewer Improvements, Phase 1

<u>Item</u>	<u>Site 1</u>	<u>Site 2</u>	<u>Site 3</u>	<u>Site 4</u>	<u>Totals</u>	
<u>LUMP SUM QUANTITIES:</u>						
Pipe Removed (8")	40		234	300	574	lf
Pipe, SS 8"	40		234	300	574	lf
Point Repair (Site 1)	1				1	LS
Point Repair (Site 2)		1			1	LS
MH Frame & Cover, Replaced	4	2	2		8	ea
MH Bench & Invert, Constructed	3				3	ea
Site Clearing					1	LS
Site Restoration					1	LS
<u>MEASURED QUANTITIES:</u>						
Service Reconnection (4")	1		2	6	9	ea
Service Reconnection (6")					1	ea *
BMP, Construction Entrance		1			1	ea
BMP, Back of Curb Protection		16			16	lf
BMP, Erosion Control Mat		15			15	sy
BMP, Silt Fence	40	16	240	40	336	lf
BMP, Drop Inlet Protection			1		1	ea

* Item included to obtain a bid price in case the item will be needed.