
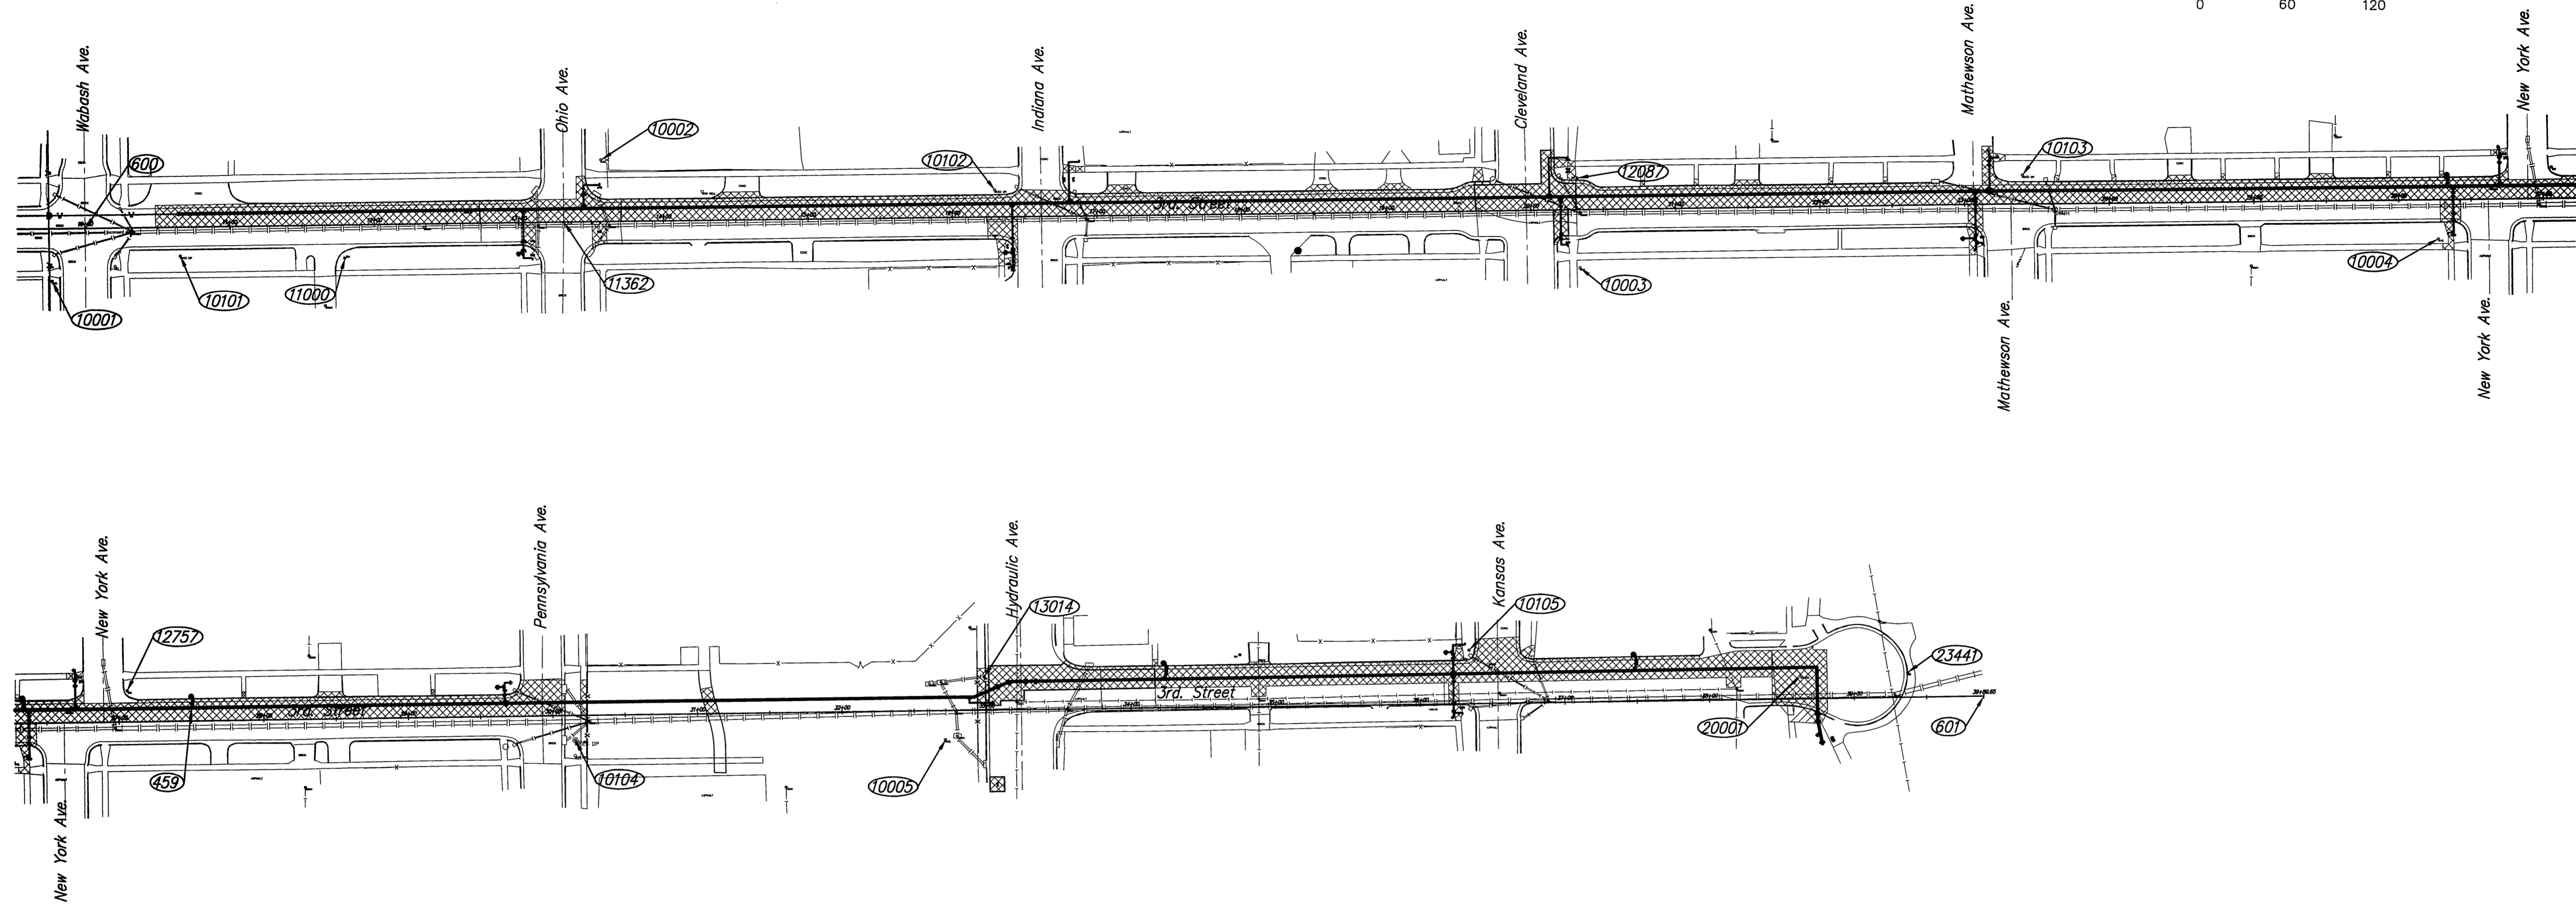


**3RD STREET
WATER MAIN REPLACEMENT
FROM CENTRAL CORRIDOR TO I-135**

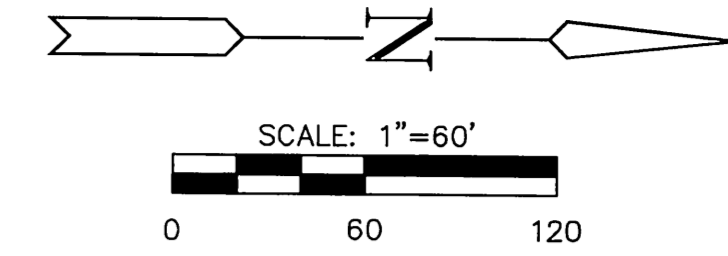

CONTROL POINTS

Number	Station	Offset	Northing	Easting	Description
10001	9+76.65	35.95 Rt.	1687860.9750	1652394.7720	NAIL
10002	13+57.29	42.29' Lt.	1687946.5160	1652773.8370	NAIL
10003	20+33.37	39.93' Rt.	1687877.3010	1653451.3760	NAIL
10004	26+27.05	27.01' Rt.	1687901.6280	1654044.6910	NAIL
10005	32+71.28	20.00' Rt.	1687921.0130	1654688.6720	NAIL
10101	10+65.54	19.85' Rt.	1687878.7800	1652483.3400	SDMD
10102	16+29.43	18.40' Lt.	1687927.8600	1653046.3900	SDMD
10103	23+40.13	19.81' Lt.	1687942.9300	1653756.9300	SDMD
10104	30+15.32	17.02' Rt.	1687919.0800	1654432.7000	SDMD
10105	36+34.19	37.04' Lt.	1687985.0200	1655050.4200	SDMD
11000	11+79.22	22.69' Rt.	1687878.1260	1652597.0540	BM EI.=1298.295
11362	13+31.08	0.01' Lt.	1687903.7400	1652748.4460	SC +CUT
12087	20+32.23	21.73' Lt.	1687938.9260	1653449.0440	BM EI.=1299.185
12757	27+05.73	21.47' Lt.	1687951.6130	1654122.4300	BM EI.=1300.675
13014	32+98.58	23.03' Lt.	1687964.5620	1654715.1420	BM EI.=1297.53
20001	38+63.05	15.99' Lt.	1687968.3710	1655279.6360	+MARK
23441	39+37.24	17.10' Lt.	1687970.9020	1655353.7950	BM EI.=1299.31

POINT TABLE

Number	Station	Offset	Northing	Easting	Desc
600	10+00.00	0.00' Rt.	1687897.3683	1652417.4263	POT on Baseline
601	39+89.65	0.00' Rt.	1687954.8165	1655406.5224	POT on Baseline

**PAVEMENT
BUBBLE MAP**

SHEET TITLE
448-90217
PROJECT NUMBER

JRA | JSB | JRA
DESIGNED DRAWN CHECKED

ISSUED
June 2012
REVISED

SHEET NO.
31 of 37