


SCALE: 1" = 40'

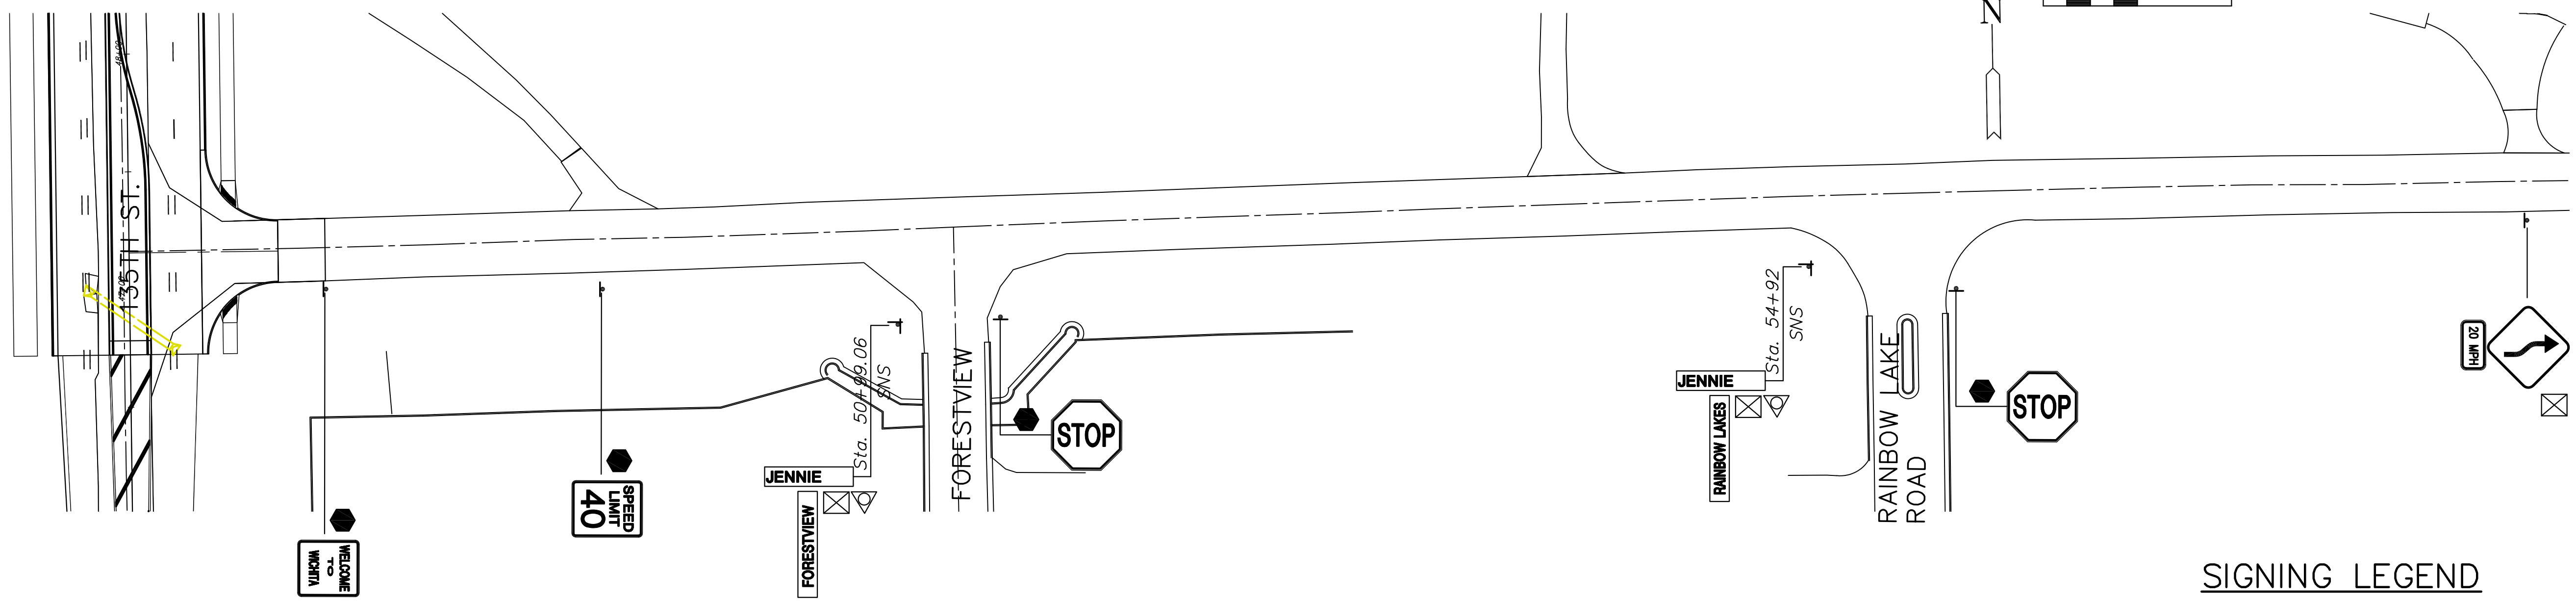


Note: All other signs on existing Central (Jennie) not specifically noted shall remain in place.

PLAN - CENTRAL (JENNIE) ROAD

SIGNING LEGEND

- Sign not part of project
- New sign and post
- Remove existing sign and post and return to sign owner
- Street Sign
- Traffic Sign

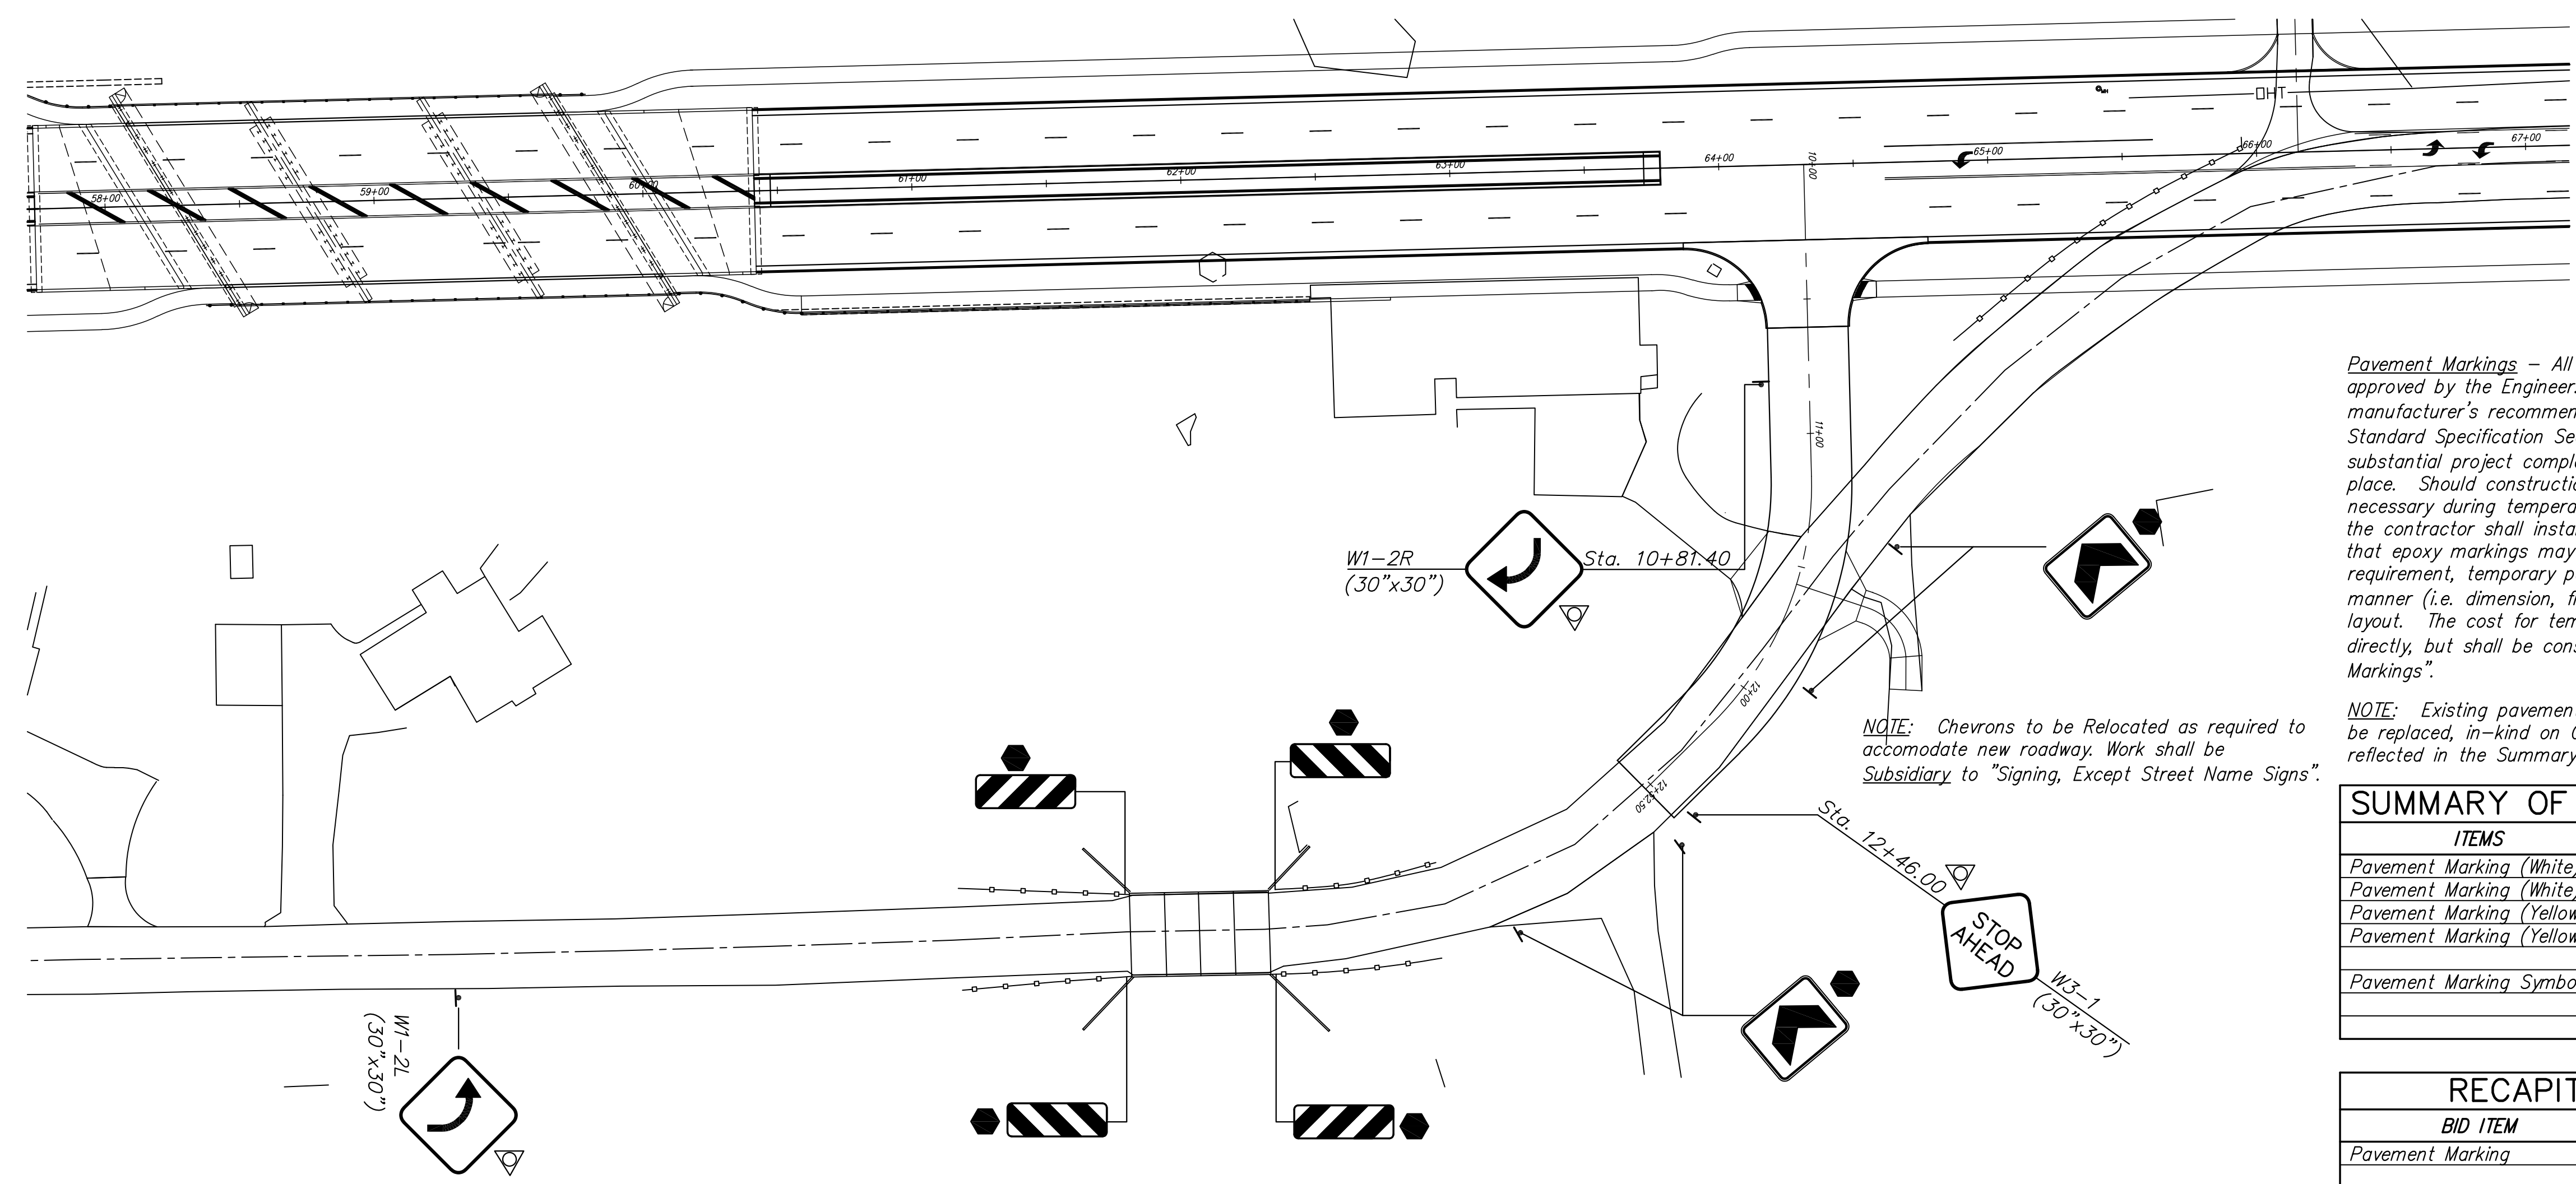

Pavement Markings - All pavement markings shall be epoxy, unless otherwise approved by the Engineer. Pavement markings shall be installed per manufacturer's recommendations and shall meet KDOT's 2007 Edition of the Standard Specification Section 806. Full traffic may not be restored (and substantial project completion achieved) until all pavement markings are in place. Should construction timing be such that restoration of traffic becomes necessary during temperatures prohibiting the installation of epoxy markings, the contractor shall install and maintain temporary markings until such time that epoxy markings may be properly installed. Except for the material requirement, temporary pavement markings shall be placed equivalent, in every manner (i.e. dimension, frequency, spacing, etc.), to the permanent marking layout. The cost for temporary pavement markings will not be paid for directly, but shall be considered subsidiary to the bid item for "Pavement Markings".

NOTE: Chevrons to be Relocated as required to accommodate new roadway. Work shall be Subsidiary to "Signing, Except Street Name Signs".

NOTE: Existing pavement markings for temporary traffic control purposes shall be replaced, in-kind on Central and on 135th Street. Quantities for this are reflected in the Summary of Quantities.

SUMMARY OF QUANTITIES (FOR INFORMATION ONLY)

ITEMS	QUANTITY	UNIT
Pavement Marking (White)(6")	7,273	L.F.
Pavement Marking (White)(24")	188	L.F.
Pavement Marking (Yellow)(4")	17,298	L.F.
Pavement Marking (Yellow)(12")	949	L.F.
Pavement Marking Symbol (Left Turn)	29	Each

RECAPITULATION OF QUANTITIES

BID ITEM	QUANTITY	UNIT
Pavement Marking	Lump Sum	L.S.

CENTRAL AVENUE
IMPROVEMENTS FROM
135TH ST. W. TO 119TH ST. W.

PAVEMENT MARKING & SIGNING PLAN

SHEET TITLE
472-84017
PROJECT NUMBER

DESIGN BY: JRA
DRAWN BY: WANJ
CHECKED BY: JRA

ISSUED
November 9, 2012
REVISED

SHEET NO.
141 of 220