
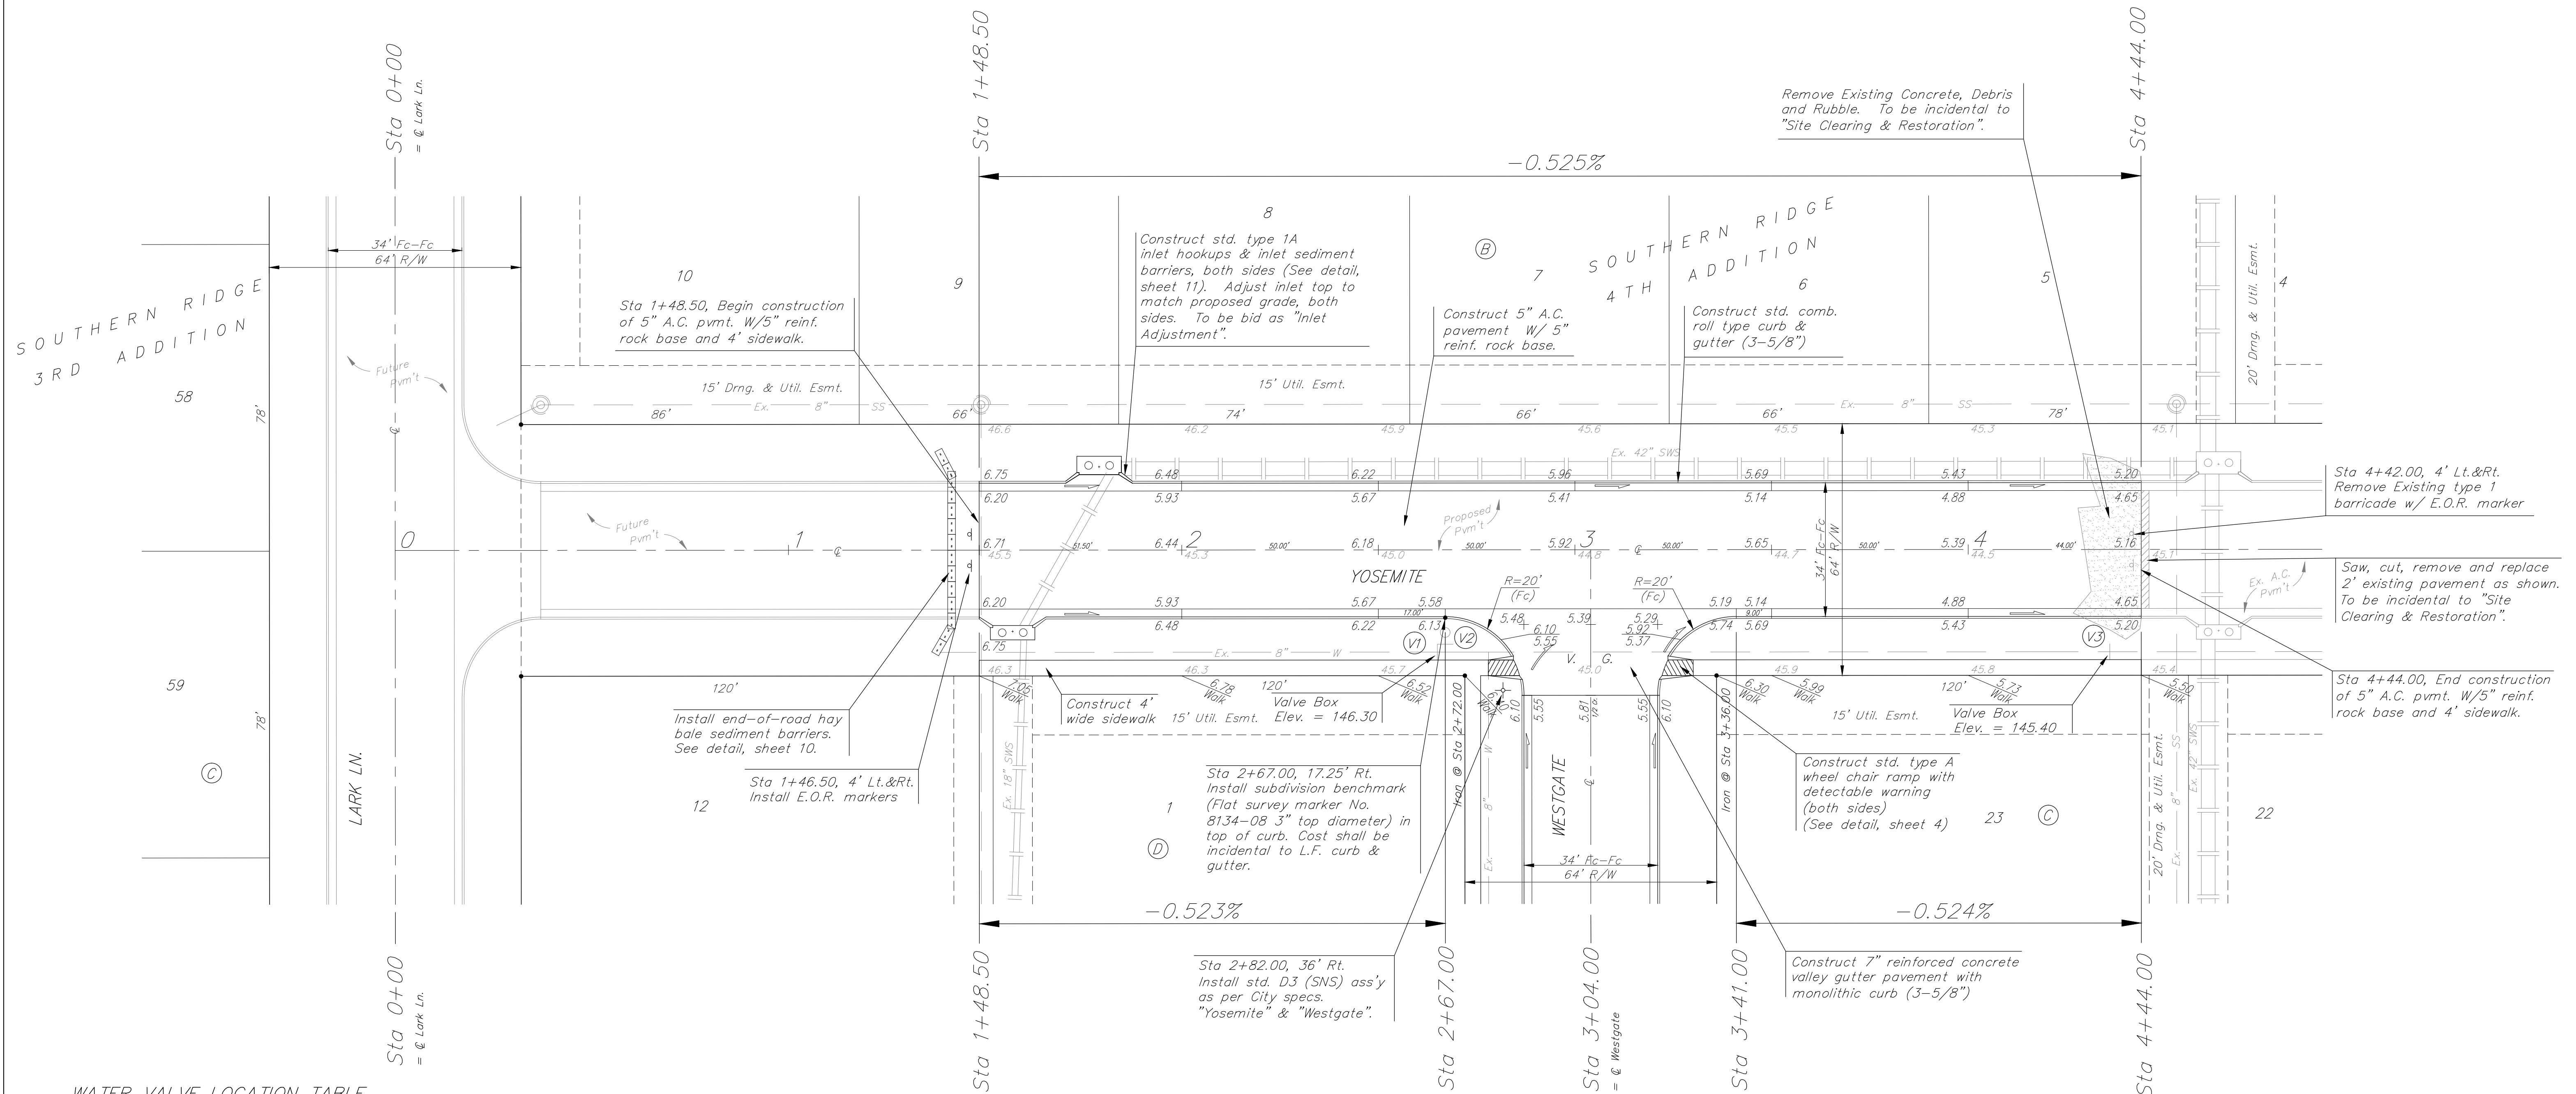


BENCHMARKS:
 BM #1: COW Disc in top of curb adjacent to the fire hydrant at the SW corner of Yosemite and Lamp Cir.
 Elev. = 146.73 (City Datum)

BM #2: COW Disc in top of curb adjacent to the fire hydrant on the west side of Westgate along the southwesterly line of Lot 13, Block B, Southern Ridge Addition.
 Elev. = 144.10 (City Datum)

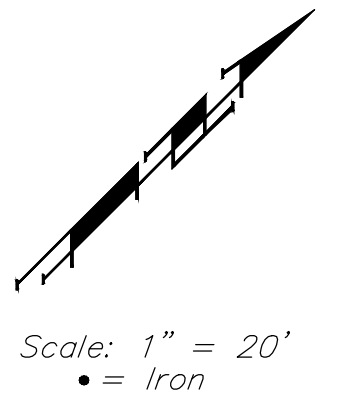

WATER VALVE LOCATION TABLE

VALVE NUMBER	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V1	2+65.00	26'	Rt.
V2	2+67.00	24'	Rt.
V3	4+36.00	26'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves are left in the "ON" position when the project is completed.

Street & Station	Location Description	Elevation
Yosemite 2+67.00, 17.25' Rt.	Adjacent to Fire Hydrant at W. End of W. Curb Return of Yosemite & Westgate.	

NOTE: ROLL TYPE CURB & GUTTER TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB.

	SOUTHERN RIDGE 4TH ADDITION - PH. II	
	YOSEMITE STA 1+48.50 TO STA 4+44.00	
<small>Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>		
PROJECT NUMBER 47284343	DESIGN AEG	DRAWN TMS
REVISIONS:	APPROVED	DATE 01/13
	SCALE Noted	
	SHEET	6 OF 16
<small>SouthernRidge4th/Phase2/Str1</small>		