


# 2013 Sanitary Sewer Reconstruction Phase 7

OCA 620644 / 468-84902

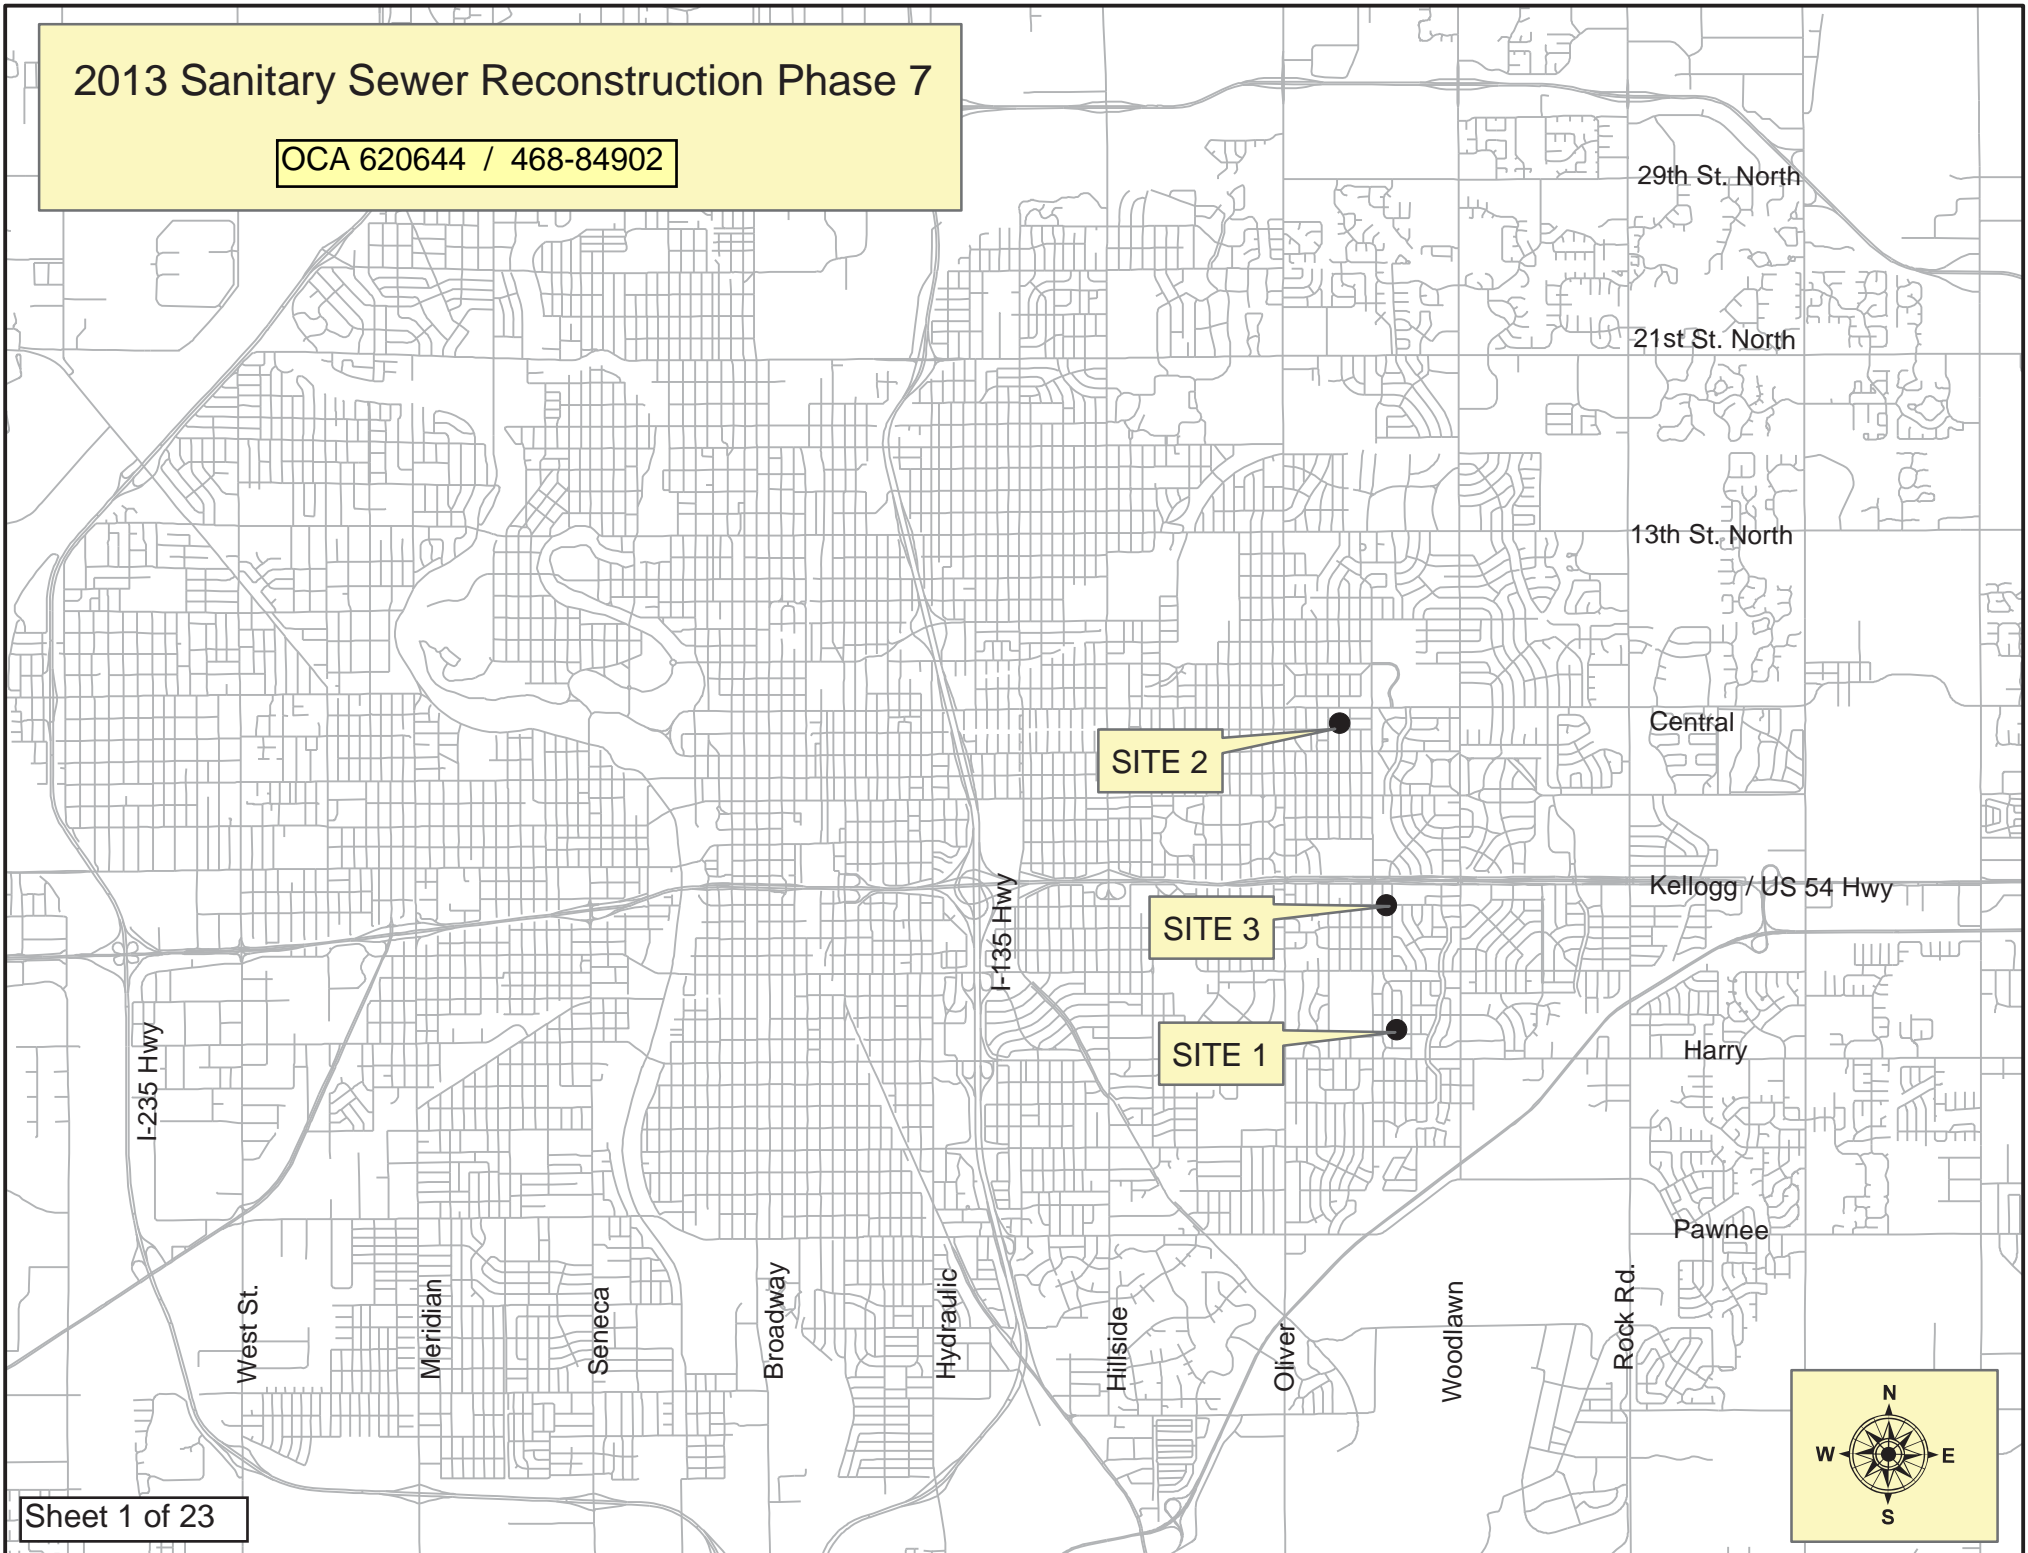

**Bid Items by Site Reference**  
2013 Sanitary Sewer Reconstruction Phase 7

<u>Item</u>	<u>Site 1</u>	<u>Site 2</u>	<u>Site 3</u>	<u>Totals</u>	
<u>Lump Sum Items:</u>					
Pipe, SS 8"	277	571		848	lf
Pipe Removed (8")	277	571		848	lf
Point Repair (Site 1 - 33 lf)	1			1	LS
Point Repair (Site 3 - 57 lf)			1	1	LS
MH Frame & Cover, Replaced	3	1	1	5	ea
MH, Bench & Invert, Removed & Replaced			1	1	ea
MH, Outside Drop Constructed	1	1		2	ea
Concrete Sidewalk Rem & Repl			4	4	lf
Concrete Pavement Rem & Replaced			16	16	lf
Fill, Flowable			16	16	lf
Site Clearing				1	LS
Site Restoration				1	LS
<u>Measured Quantity Items:</u>					
Service Reconnection, Sewer (4")	10	16		26	ea
BMP, Construction Entrance		1		1	ea
BMP, Back of Curb Protection			20	20	lf
BMP, Silt Fence		20		20	lf
BMP, Erosion Control Mat		20	30	50	sy

<u>SITE NO.</u>	<u>GENERAL LOCATION</u>	<u>UPSTREAM MANHOLE</u>	<u>DOWNSTREAM MANHOLE</u>	<u>UPSTREAM INVERT ELEVATION</u>	<u>DOWNSTREAM INVERT ELEVATION</u>	<u>LENGTH</u>
1	Easements east & west of Pineridge Street, south of Zimmerly	5846-273 5846-276	5846-272 5846-275	1326.35 Point Repair	1326.07	277
2	Easement between Plaza Lane and 3rd St. from Parkwood to Pinecrest	5847-333 5847-332	5847-332 5847-328	1369.47 1362.45	1366.49 1361.41	275 296
3	Easement between Christine & Lightner, at Orme Street	5846-037	5846-036	Point Repair		