STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	472-84692	2013	82	193

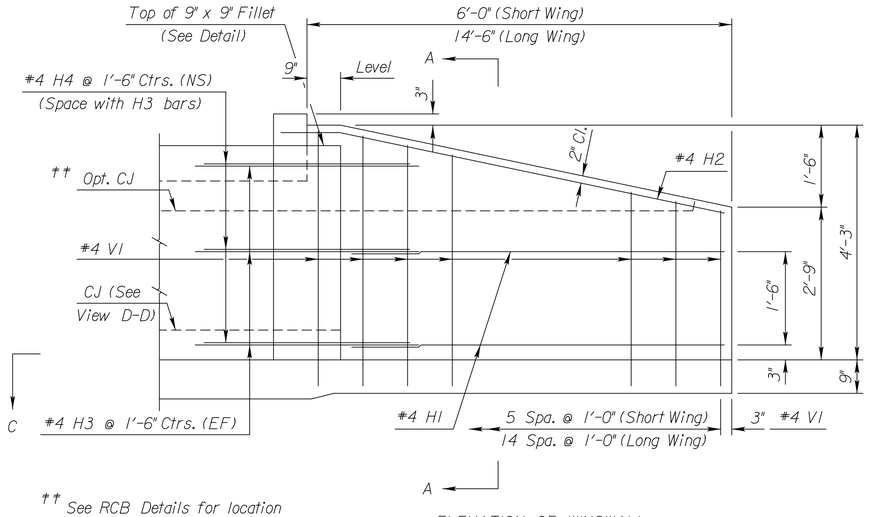

†† See RCB Details for location of construction joint.

ELEVATION OF WINGWALL
(Backface Shown)

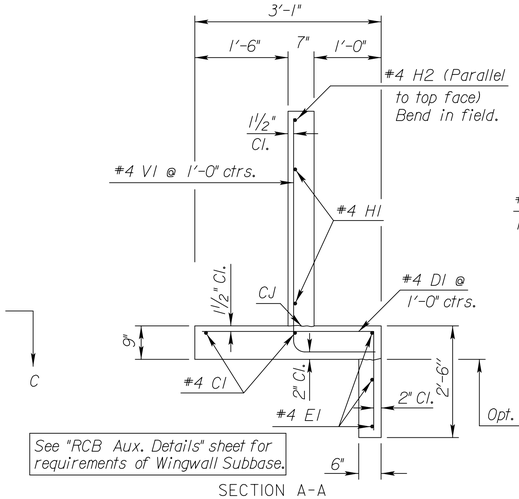

See "RCB Aux. Details" sheet for requirements of Wingwall Subbase.

SECTION A-A



Fillet Detail

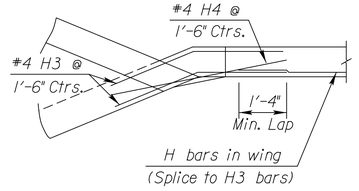

H bars in wing
(Splice to H3 bars)

DETAIL OF 9" x 9" FILLET
(Plan View)

† NOTE: Const. Jt. may be used at Contractor's option when approved by the Engineer. DI bars or mesh may be spliced thus: ⌐ Minimum overlap shall be 1'-3". No increase in quantities or cost shall be allowed when Contractor elects this option.

GENERAL NOTES

UNIT STRESSES: Grade 4.0 Concrete; f'c = 4,000 p.s.i.
Reinforcing Steel; fy = 60,000 p.s.i.

CONCRETE: Grade 4.0 Concrete shall be used throughout. Bevel all exposed edges with a ¾inch triangular moulding.

REINFORCING: All reinforcing shall conform to ASTM A615, Grade 60. Welded Wire Fabric shall conform to ASTM A185. All dimensions relative to reinforcing steel shall be to center-line of bar unless otherwise noted. All steel shall be epoxy coated, with excption to the precast sections and welded wire fabric.

QUANTITIES: Wingwall Quantities include all quantities outside the neat lines of the box, excluding the hubguard.

APRON: A 5" concrete slab shall be constructed between the down-stream wings in locations subject to scour only when specified on the plans or by the Engineer. Wire Reinforcing mesh shall be electrically welded and shall be composed of 6 x 6-W1.4 x W1.4 welded wire fabric and shall be classified as pounds of reinforcing and included in the total quantity for the bid item Reinforcing Steel (Gr. 60)

BACKFILL MATERIAL: Soils judged as high plasticity clays, fat clays, expansive clays, or organic clays are unsuitable for backfill material for wingwalls and will not be used. Where these conditions exist, use Granular Backfill (Wingwalls).

FOUNDATION STABILIZATION: Use Foundation Stabilization on all wingwalls unless founded on rock or granular material.

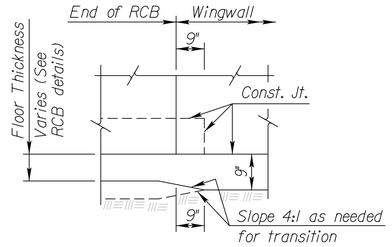

VIEW D-D

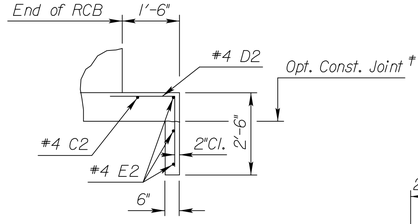

SECTION E-E

NOTE:
EF = Each Face
NS = Near Side
FS = Far Side
CJ = Const. Joint

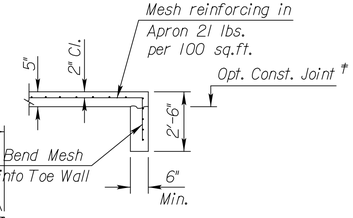

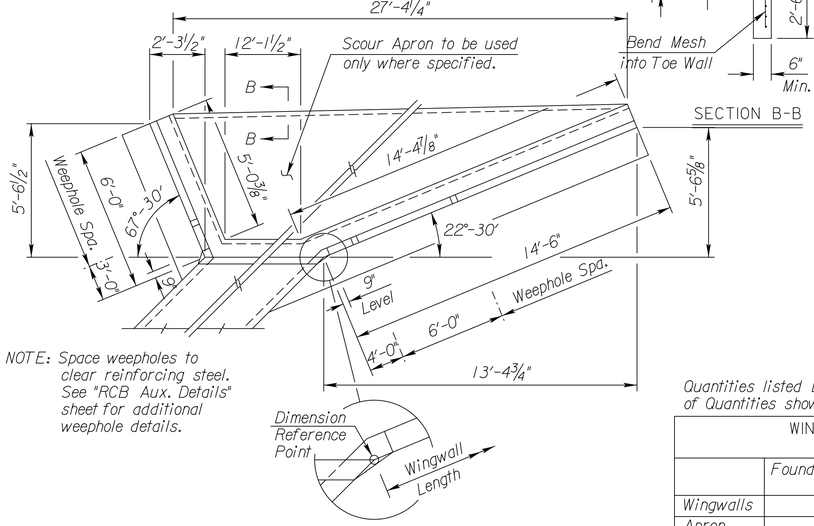

SECTION B-B

NOTE: Space weepholes to clear reinforcing steel. See "RCB Aux. Details" sheet for additional weephole details.

WING DIMENSIONS FOR 45° SKEWED BOX
(3½:1 Embankment Slope)

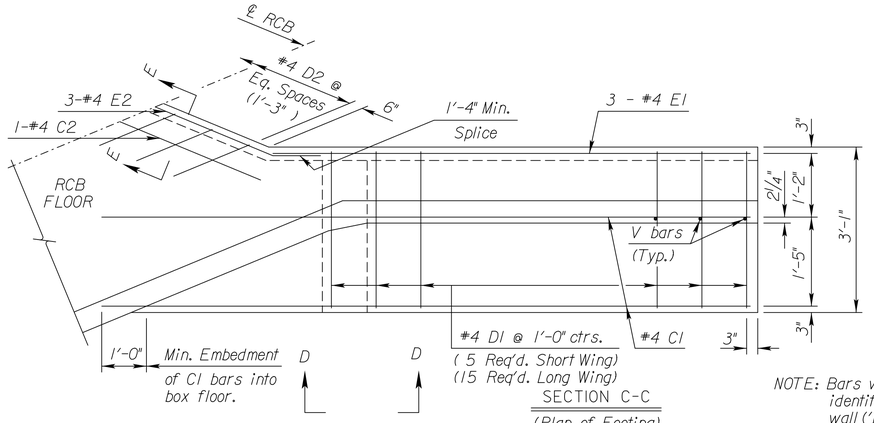

SECTION C-C
(Plan of Footing)

NOTE: Bars with an 'L' or 'S' designation identifies bars in the long wing-wall ('L') or short wingwall ('S'); ie. #4 H2L, #4 H2S, etc.

* See Bending Diagram

45° Skew	Mark	#4 CIS	#4 CIL	#4 DI	#4 EIS	#4 EIL	#4 C2	#4 D2	#4 E2	#4 VIS	#4 VIL	#4 HIS	#4 HIL	#4 H2S	#4 H2L	#4 H3S	#4 H3L	#4 H4S	#4 H4L
	Number	2	2	20*	3	3	1	9 *	3 *	6	15	2	2	1	1	6 *	6 *	3	3
	Length	7'-6"	18'-6"	4'-11"	4'-9"	14'-2"	12'-5"	5'-8"	14'-1"	*	*	4'-10"	13'-4"	6'-8"	16'-0"	5'-0"	5'-0"	2'-6"	4'-0"

NOTE: Reinforcing Bar List is for both wings at one end of box only.

Bar	Incrmts.
VIS	3½"
VIL	1¼"

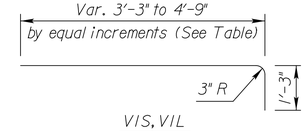

VIS, VIL



DI, D2

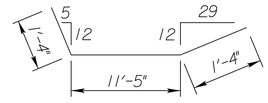

E2



H3S



H3L

BENDING DIAGRAM
(All dimensions are out to out of bars.)

Quantities listed below are included in the Summary of Quantities shown on the RCB details.

WINGWALL QUANTITIES (One End Only)		
	Foundation Stabilization (C.Y.)	Concrete (Gr. 4.0) (C.Y.)
Wingwalls	0.00	4.67
Apron	0.00	2.59
Soil Saver	0.00	0.00
Reinforcing Steel (Gr. 60)		375 Lbs.
Welded Wire Fabric		34 Lbs.

NO.	DATE	REVISIONS	BY	APP'D

KANSAS DEPARTMENT OF TRANSPORTATION
SWS Sta. 100+00
FLARED WINGWALLS
3 ft Rise (45°SKEW)

BR 10.45.03 Sedgwick Co.

FHWA APPROVAL	6-5-91	APP'D	KENNETH F. HURST
DESIGNED	DETAILED	QUANTITIES	TRACED
DESIGN CK.	DETAIL CK.	QUAN.CK.	TRACE CK.

Plotted By: svb Plot Location:
File: I:\2008\08207\Bridge\Final\08207 - 9x3 skew 45 left RCB (Wing).dgn
Plot Date: 8/19/2013