



TWORKS SIGN 8
 2.00" RADIUS, 0.75" BORDER, BLUE ON WHITE;
 [KANSAS] BLACK C;
 [DEPARTMENT OF TRANSPORTATION] BLACK C 90% SPACING;
 [T] ORANGE; 0.3" BLACK BORDER
 LANE LINES: .3"X1.4" WHITE; 0.75" SPACING FROM BOTTOM
 [WORKS] C 75% SPACING;
 TABLE OF DISTANCES BETWEEN LETTER AND OBJECT LEFTS.

12.88	K	A	N	S	A	S	12.88							
	D	E	P	A	R	T	M	E	N	T	O	F		
2.59	1.18	1.04	1.12	1.24	1.12	1.05	1.34	1.04	1.12	2.24	1.23	2.24		
T	R	A	N	S	P	O	R	T	A	T	I	O	N	2.59
1.04	1.12	1.24	1.18	1.11	1.23	1.12	0.88	1.08	1.05	0.53	1.22	0.88		
2.6	T	13.2	20.2											
12.25	W	O	R	K	S	2.52								
	5.26	4.42	4.22	4.05	3.28									

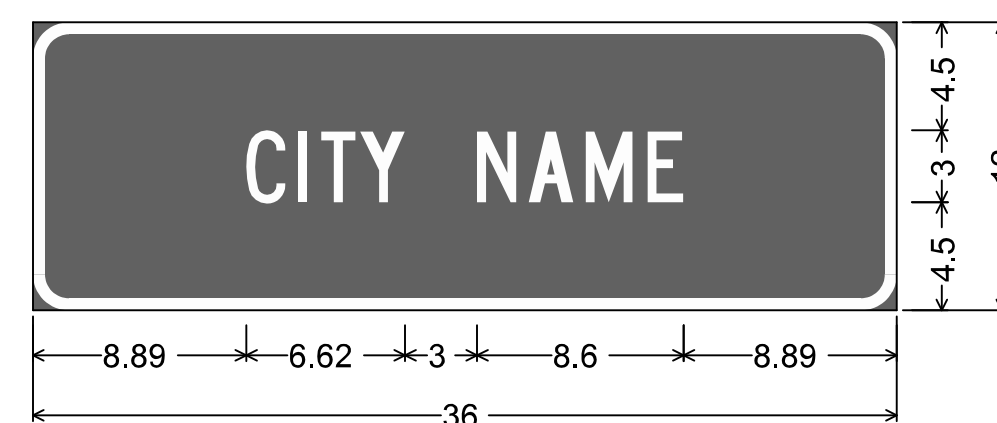

TWORKS SIGN 7
 1.50" RADIUS, 0.50" BORDER, WHITE ON BLUE;
 [CITY NAME] C;
 TABLE OF DISTANCES BETWEEN LETTER AND OBJECT LEFTS.

8.89	C	I	T	Y	N	A	M	E	8.89
	2.14	0.93	1.67	4.88	2.14	2.39	2.57	1.50	

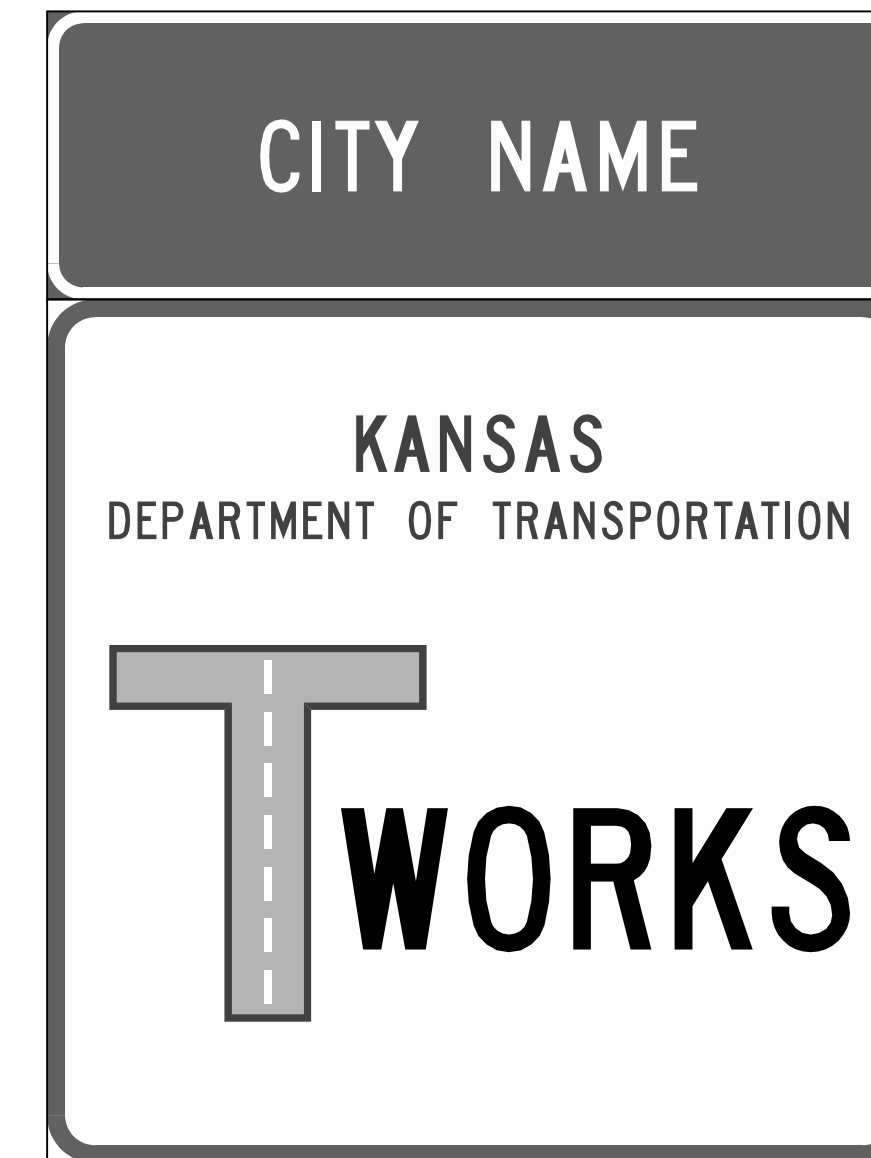

TYPICAL SIGN ASSEMBLY

GENERAL NOTES

- THE "TWORKS" SIGN BLANK MATERIAL SHALL BE ALUMINUM, WOOD, OR FIBERGLASS REINFORCED PLASTIC.
- THE "TWORKS" SIGN FACES SHALL BE COVERED WITH TYPE IV HIGH INTENSITY RETROREFLECTIVE SHEETING.
- THE "TWORKS" SIGNS SHOULD BE MOUNTED ON APPROVED POSTS, AS SHOWN ON TE712 WITHOUT THE USE OF BRACING, GUY WIRES, OR TIE-DOWNS. THE "TWORKS" SIGNS MAY ALSO BE MOUNTED ON SKIDS. THE MOUNTING HEIGHTS AND LATERAL OFFSETS ARE TO BE SHOWN ON TE714.
- THE "TWORKS" SIGNS SHOULD BE INSTALLED IN ADVANCE OF THE FIRST TRAFFIC CONTROL SIGN A DISTANCE OF 500' FOR A TWO-WAY ROADWAY IN A RURAL LOCATION AND 100' TO 350' IN AN URBAN AREA DEPENDING UPON THE SPEED. THE FIRST TRAFFIC CONTROL SIGN IS EITHER THE "ROAD WORK AHEAD" OR THE "GIVE 'EM A BRAKE" SIGN. THE ENGINEER MAY DESIGNATE A MORE APPROPRIATE LOCATION IF CONDITIONS DICTATE.
- THE "TWORKS" SIGNS SHALL NOT INTERFERE WITH THE TRAFFIC CONTROL SIGNS FOR THE PROJECT OR WITH ANY OTHER REGULATORY, WARNING, OR GUIDE SIGN THAT IS TO REMAIN IN PLACE DURING CONSTRUCTION.
- THE TWORKS SIGN ASSEMBLY CONSISTS OF A TWORKS SIGN 7 AND AND TWORKS SIGN 8. THE BID ITEM FOR THIS ASSEMBLY IS "TWORKS SIGN ASSEMBLY" WITH A BID UNIT OF "EACH".
- THE TWORKS SIGN ASSEMBLY SHOULD REMAIN IN PLACE FOR SIX (6) MONTHS FOLLOWING THE COMPLETION OF THE PROJECT AND BECOME THE PROPERTY OF KDOT OR THE LOCAL JURISDICTION.

3	10/16/12	Modified General Note	J.A.M.	K.P.
2	10/4/11	Removed Swoosh From TWork Sign	J.A.M.	K.P.
1	9/1/10	Modified Bid Item	J.A.M.	K.P.
NO.	DATE	REVISIONS	BY	APP'D

KANSAS DEPARTMENT OF TRANSPORTATION				
DETAILS FOR THE				
TRANSPORTATION WORKS				
FOR THE KANSAS (TWORKS) SIGNS				
LOCAL PROJECTS				
TE715C				
FHWA APPROVAL	10/16/12	APP'D	Kristina Pyle	
DESIGNED	D.G.	DETAILED	D.G.	QUANTITIES
DESIGN CK.	J.A.M.	DETAIL CK.	J.A.M.	QUAN. CK.
			TRACED	BY
			TRACE	CK.