

TEMPORARY EROSION CONTROL DETAIL FOR SLOPE PROTECTION


THE ENGINEER MAY DETERMINE THAT THE HEIGHT OF BERM SHOULD BE INCREASED OVER THAT SHOWN IF DRAINAGE CONDITIONS ARE PRODUCING SLOPE EROSION.

TEMPORARY EROSION CONTROL BERMS SHALL BE CONSTRUCTED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

AT REGULAR INTERVALS OF NO GREATER THAN 250 FT, AND WHERE FLOW IS CONCENTRATED, SUCH AS THE CORNERS OF THE POND, OR AS DIRECTED BY THE ENGINEER, AND AS PER PLANS DEPICT PROVIDE BREAKS IN THE BERM TO ALLOW CONTROLLED DISCHARGE OF TRAPPED WATER. DISCHARGE LOCATIONS SHALL BE PROTECTED AS NECESSARY TO PREVENT SLOPE EROSION. SEE TYPICAL SECTION.

ALL AREAS WHERE FLOW IS CONCENTRATED SHALL BE PROTECTED BY SILTATION BARRIERS PRIOR TO DISCHARGING INTO ANY DITCH, STORM SEWER, OR WATERCOURSE, AS APPROVED BY THE ENGINEER.


MEASUREMENT AND PAYMENT: THIS WORK SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE CONSIDERED SUBSIDIARY TO "UNCLASSIFIED EXCAVATION".

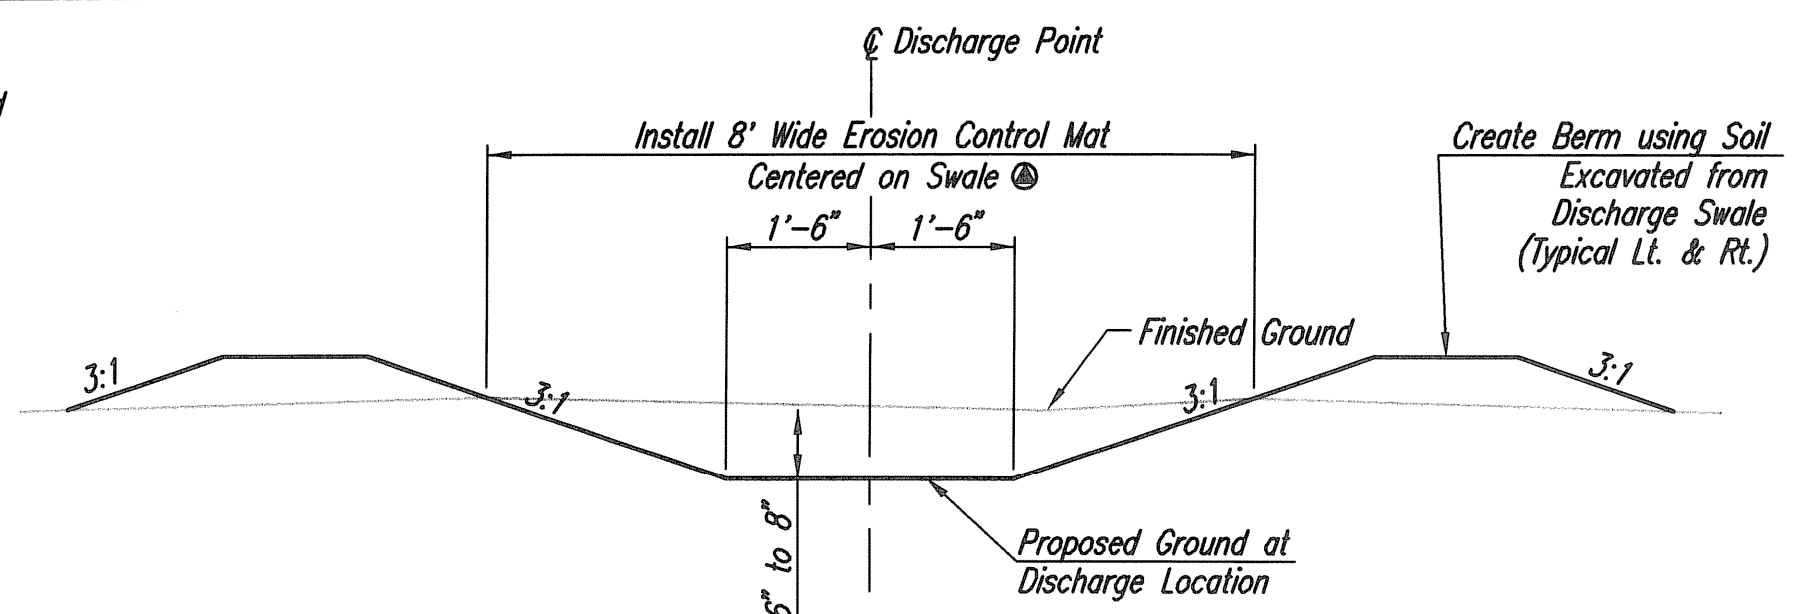


TYPICAL SECTION
(Erosion Berm Discharge Point)

④ EROSION CONTROL MAT SHALL BE NORTH AMERICAN GREEN P300 OR APPROVED EQUIVALENT. INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.


PAID FOR AS S.Y. "EROSION CONTROL MAT" AS INDICATED ON PLANS. THE BID PRICE SHALL BE CONSIDERED FULL COMPENSATION FOR ALL MATERIALS, LABOR, EQUIPMENT, TOOLS, AND INCIDENTS NECESSARY TO COMPLETE WORK.

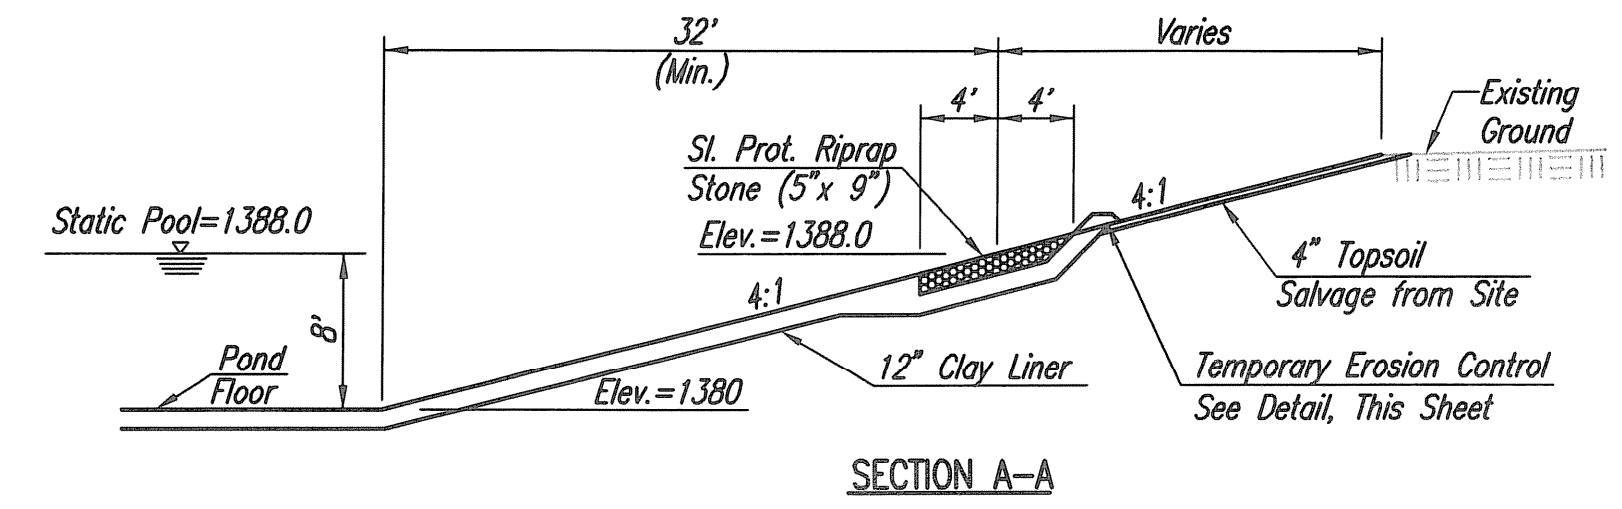


SECTION A-A

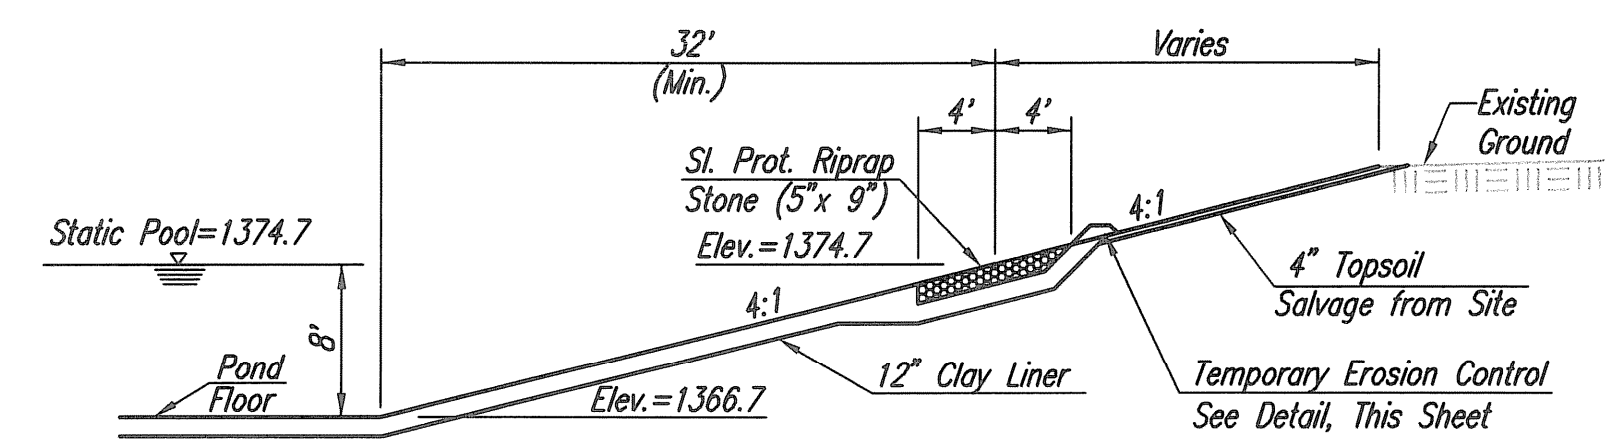

SECTION B-B

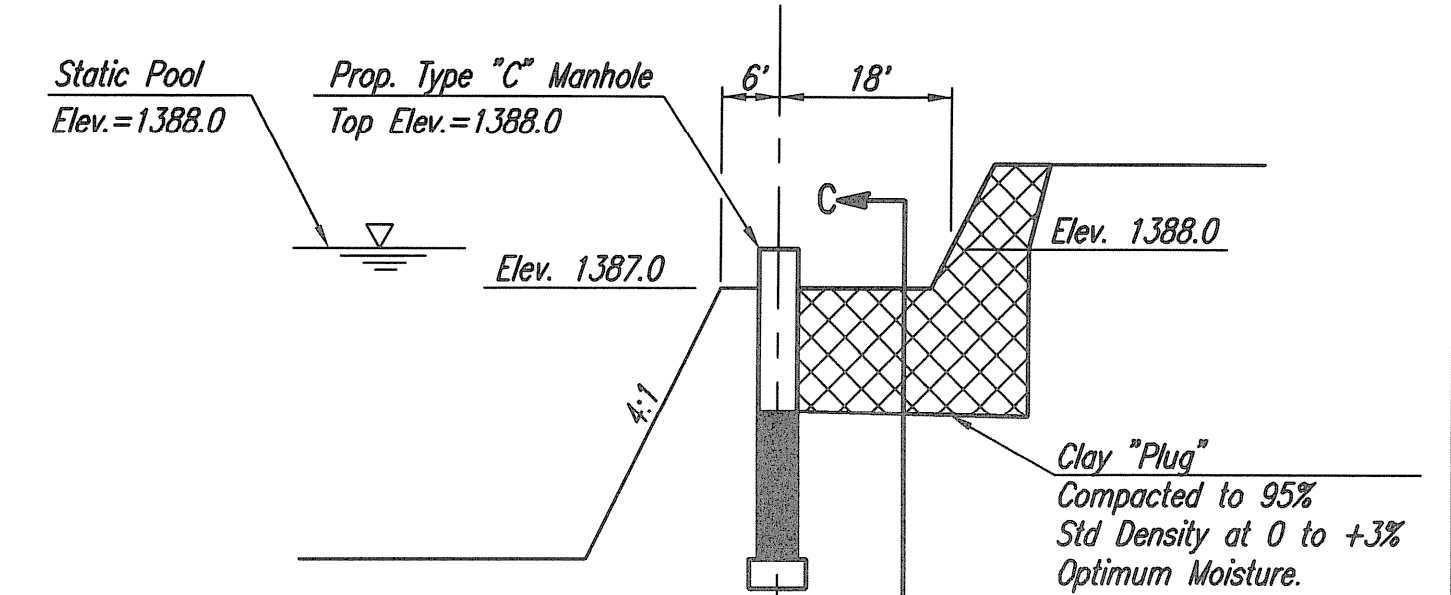

SECTION C-C

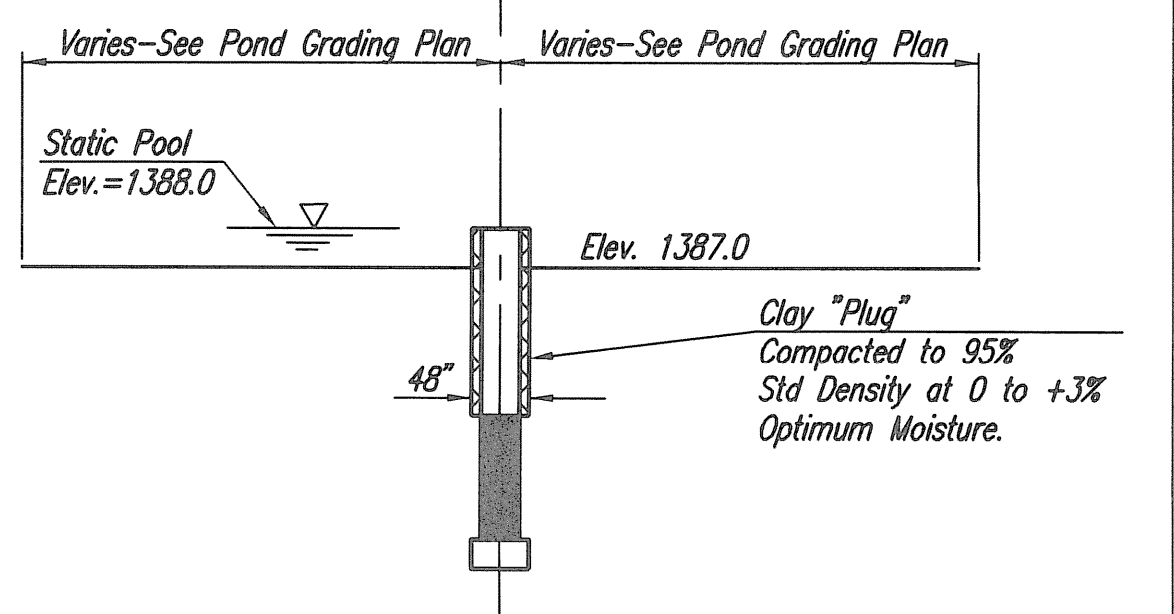


SECTION DETAILS

POND SEALING NOTES:


THE POND AREAS BELOW STATIC POOL ELEVATION SHALL BE OVEREXCAVATED TO A DEPTH OF ONE FOOT BELOW THE FINAL POND SURFACE. THE OVEREXCAVATED MATERIAL SHALL BE STOCKPILED FOR RE-USE, UTILIZED IN PROJECT EMBANKMENTS, OR STOCKPILED ON SITE. BACKFILL OVEREXCAVATED AREA WITH PROJECT AREA CLAY MATERIAL AND COMPACTED TO PROVIDE AN IMPERVIOUS SURFACE. NO SHALE PERMITTED IN THIS ZONE. PROVIDE QUALITY CONTROL TESTING AS OUTLINED IN THE GEOTECHNICAL REPORT.

POND SEALING, AS DESCRIBED HEREIN, SHALL BE MEASURED AND PAID FOR AS FOLLOWS: THE OVEREXCAVATION WILL BE PAID FOR UNDER THE LUMP SUM BID ITEM "POND SEALING". THIS SHALL BE CONSIDERED FULL COMPENSATION FOR ALL OVEREXCAVATION, STOCKPILING, AND DOUBLE HANDLING OF EARTHWORK (IF NECESSARY).

PROPERTY	TEST METHOD	TEST VALUE
MIN. % PASSING #200 SIEVE	ASTM D1140	80
MIN. LIQUID LIMIT	ASTM D4318	40
MIN. PLASTICITY INDEX	ASTM D4318	25

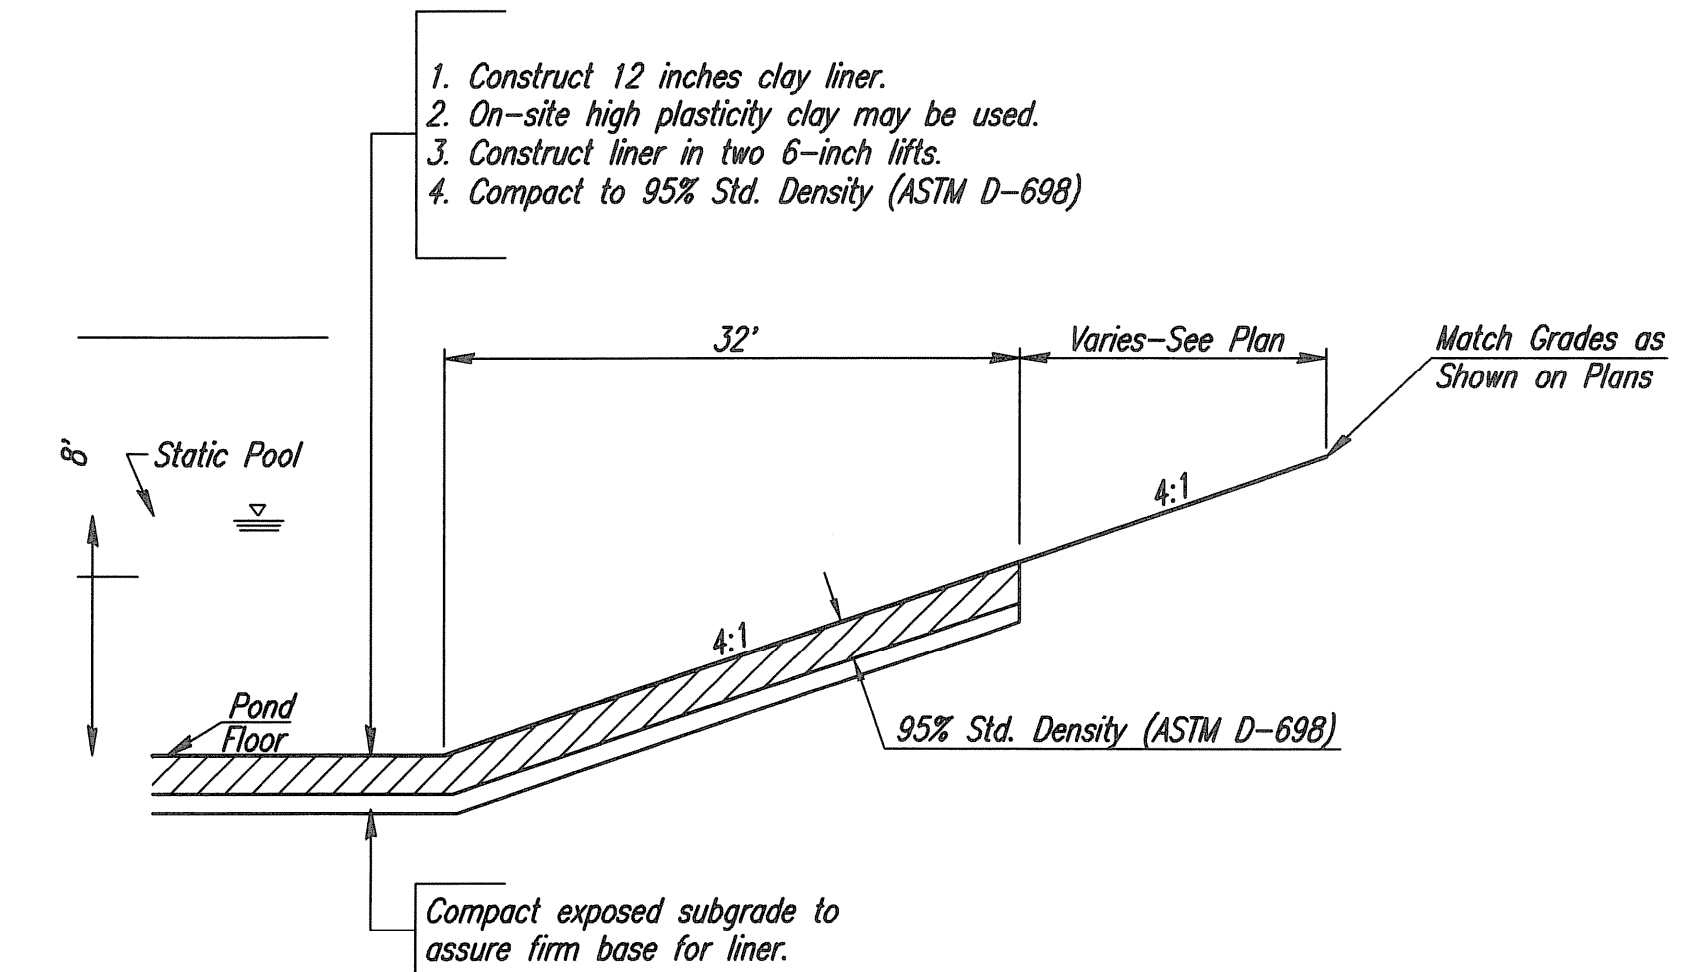

CLAY LINER CONSTRUCTION PROCEDURE FOR POND SEALING

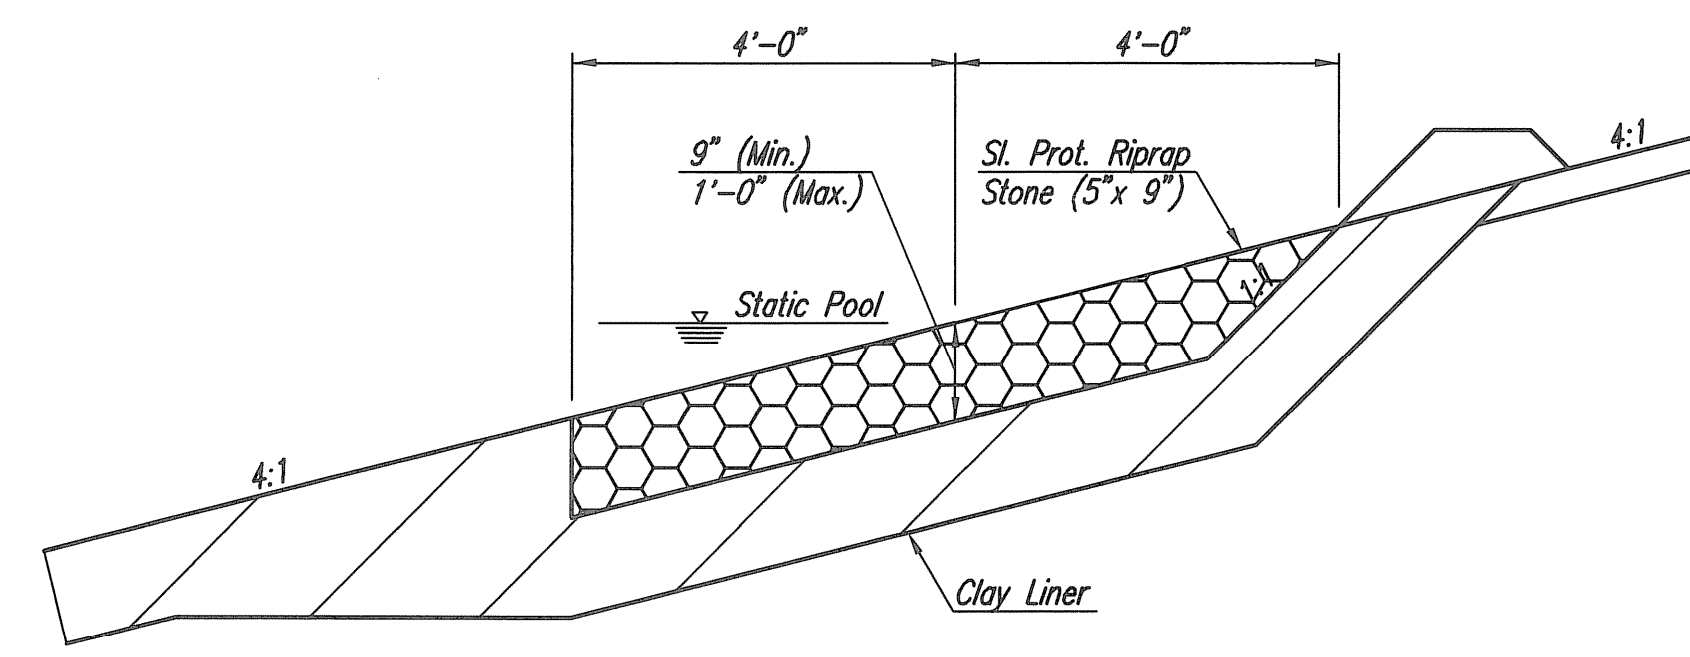

SLOPE PROTECTION RIPRAP (5" x 9")


NOTES

RIPRAP MATERIALS SHALL MEET THE REQUIREMENTS FOR QUALITY AND DELETERIOUS SUBSTANCES AS SET FORTH IN SUBSECTION 1114 OF STANDARD SPECIFICATIONS FOR STATE ROAD AND BRIDGE CONSTRUCTION, KANSAS DEPARTMENT OF TRANSPORTATION, 2007 EDITION.

SHALL BE PAID FOR AS SQUARE YARD "SLOPE PROTECTION RIPRAP STONE (5"x 9")" AS INDICATED ON PLANS.

POND GRADING NOTES:

CONTRACTOR SHALL PERFORM GRADING AS SHOWN BY CONTOURS AND COORDINATES ON SHEET NO. EARTHWORK VOLUMES FOR THIS GRADING HAVE BEEN INCLUDED IN THE BID ITEM "UNCLASSIFIED EXCAVATION".

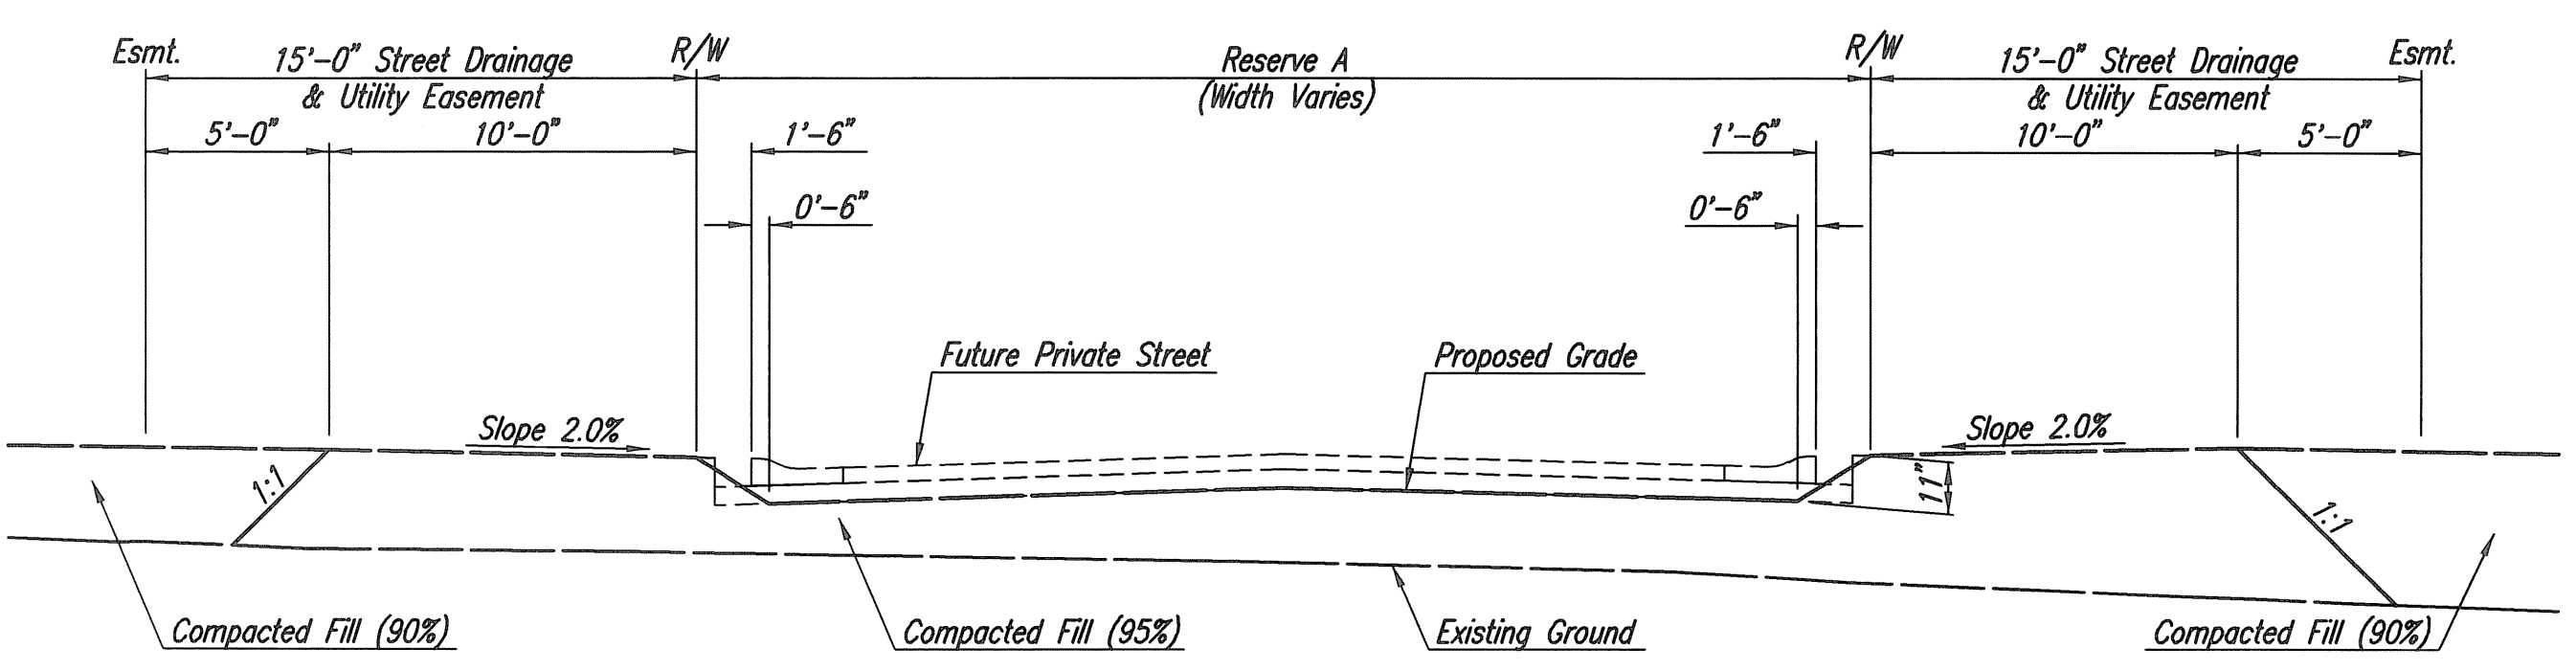

RESERVE A TYPICAL SECTION

Saved 01-27-2014 1:51:05 PM by BJS
 Plot Scale 1:1 01-28-2014 3:58:21 PM by BJS
 C:\2013\13438\002\13438-002-08-TYPICAL SECTIONS

No.		Revision		By	Date
GLEN MEADOWS 2ND ADDITION STORM WATER DRAIN NO. 359 TYPICAL SECTIONS GARY JANZEN, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 468-84634					
Designed by	BMM	Job No.	35-13438-002	Sht.	09 of 28
Drawn by	BJS	Date	September 2013		