


SE of Maize and 21st - 10321 W 21st St N



Attachment A - 472-85156 Bench and Shelter Installation, West Side Service, Wichita, KS

Remove bench and bicycle rack. Pad for bicycle rack shall be removed (sawcut and removed to nearest joint or edge) and sod shall be installed in its place per General Notes and City standards. Bicycle rack is to be protected from damage and is intended to be salvaged with the concrete removed from it. Post-removal and cleaning, rack shall be inspected by Transit and with their direction, Contractor shall either: 1. dispose of it, or 2., relocate it to Millwood and Douglas if the rack at that site is deemed inferior, following its removal for its relocation, or 3. transported by Contractor to a storage facility for Transit. Costs for said work are subsidiary to the site clearing, bench removal, and bicycle rack bid items.

The Contractor shall transport the bench to a Transit storage facility. Coordinate said activity as necessary with Philip Zevenbergen (phone: 316-352-4816, email: pzevenbergen). Work shall be performed per City details, the manufacturer's specifications, to City standards, or as directed by the Engineer or Zevenbergen. Transport costs are subsidiary to the bench removal bid item.

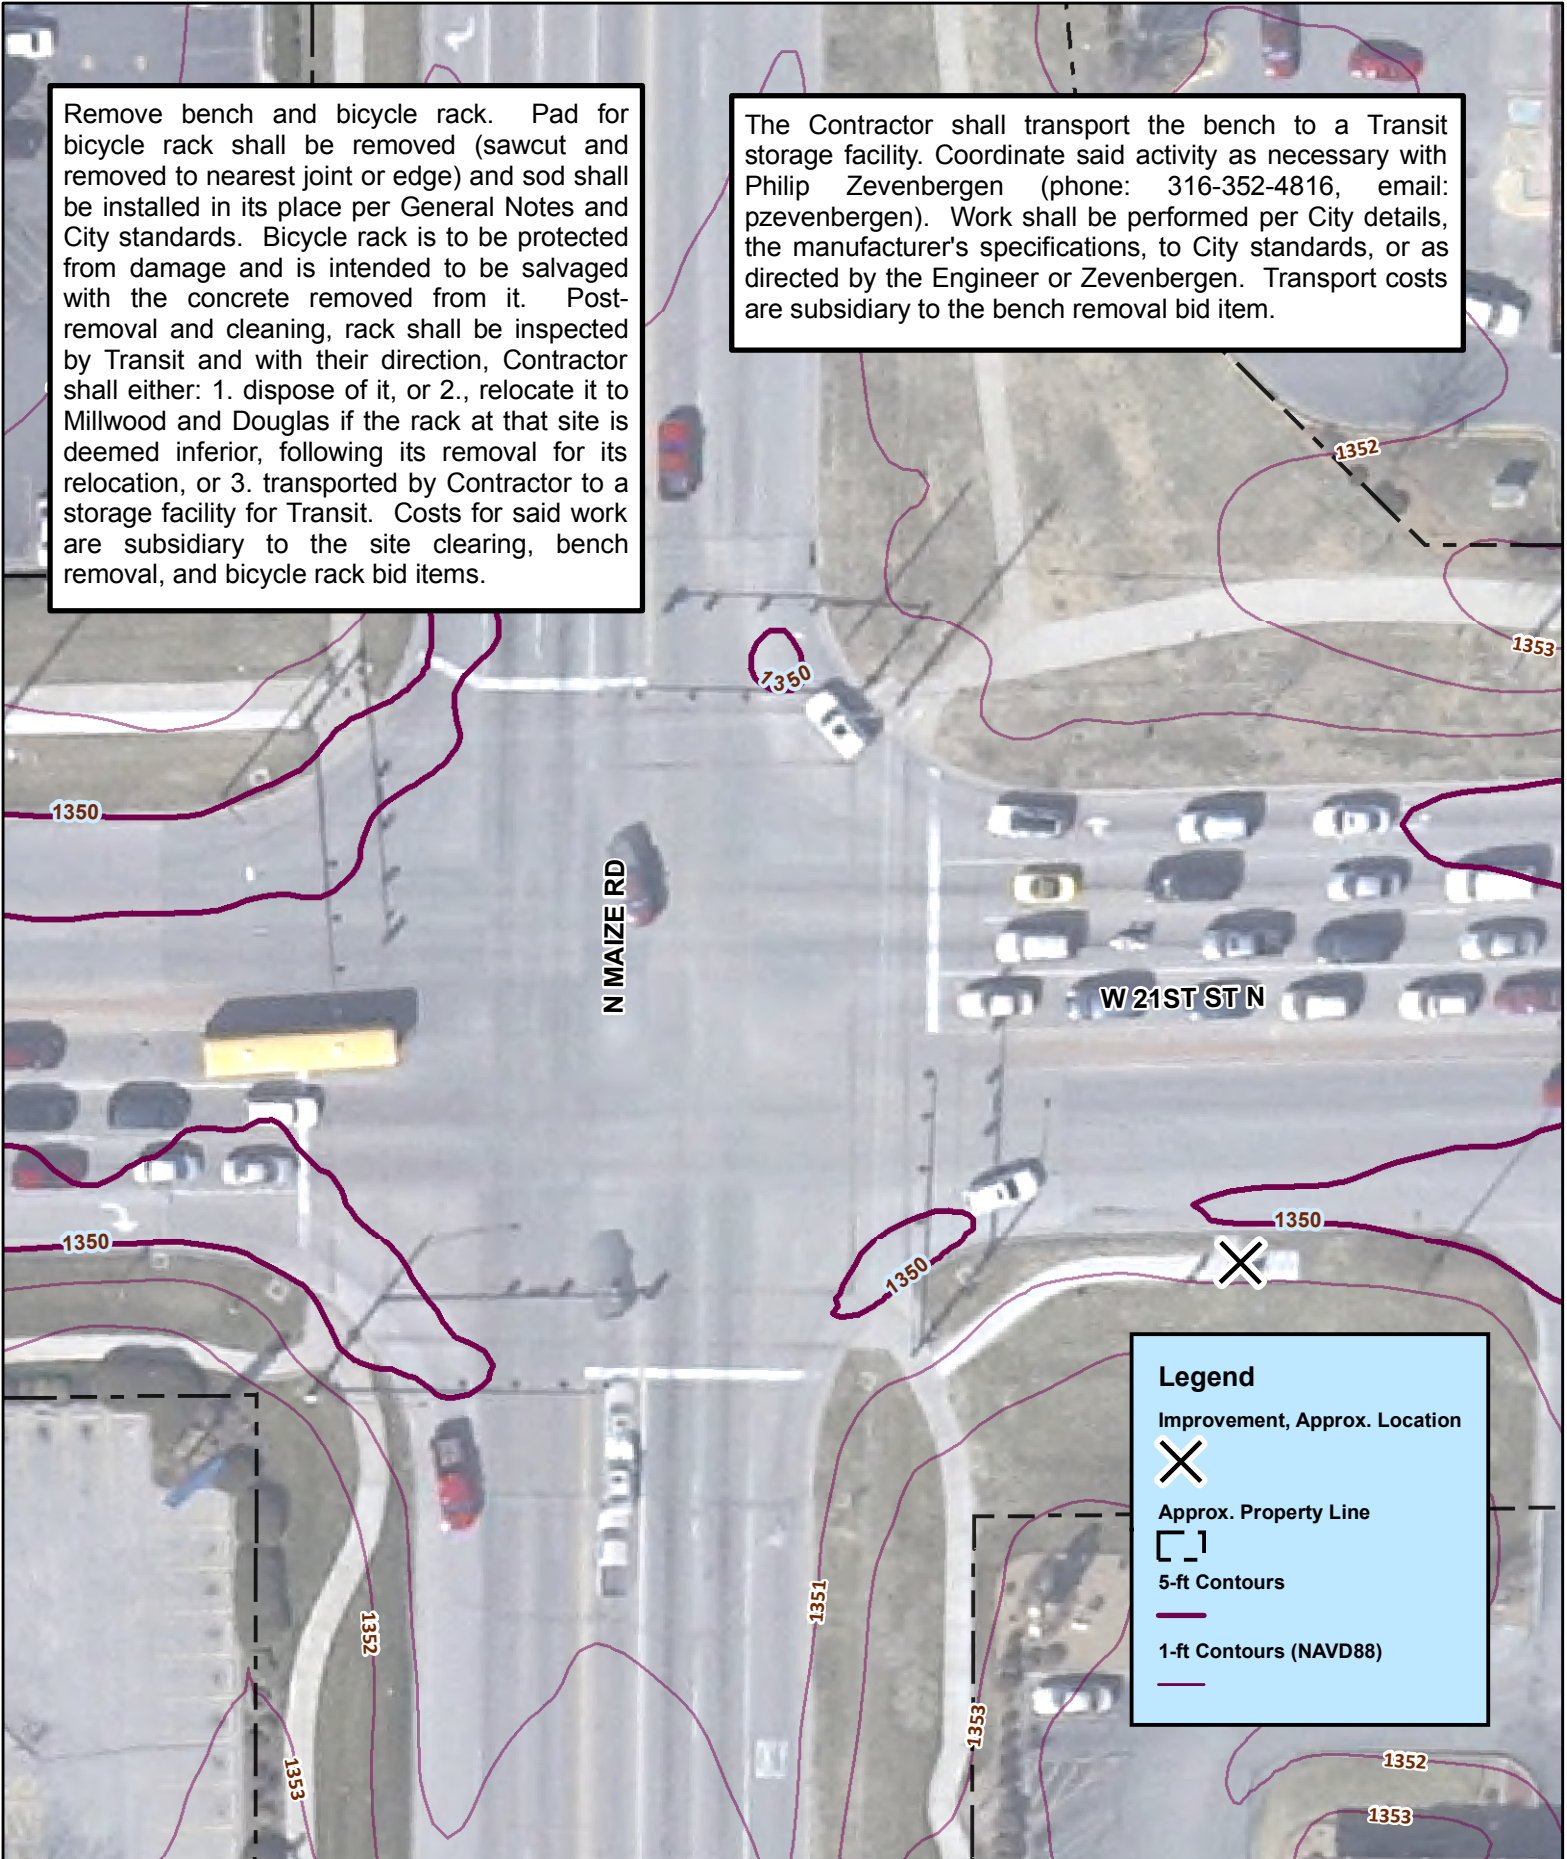

Legend

- Improvement, Approx. Location
- X
- Approx. Property Line
-
- 5-ft Contours
-
- 1-ft Contours (NAVD88)
-