



2014 Sanitary Sewer Reconstruction Phase 2

OCA 620702 / 468-84931

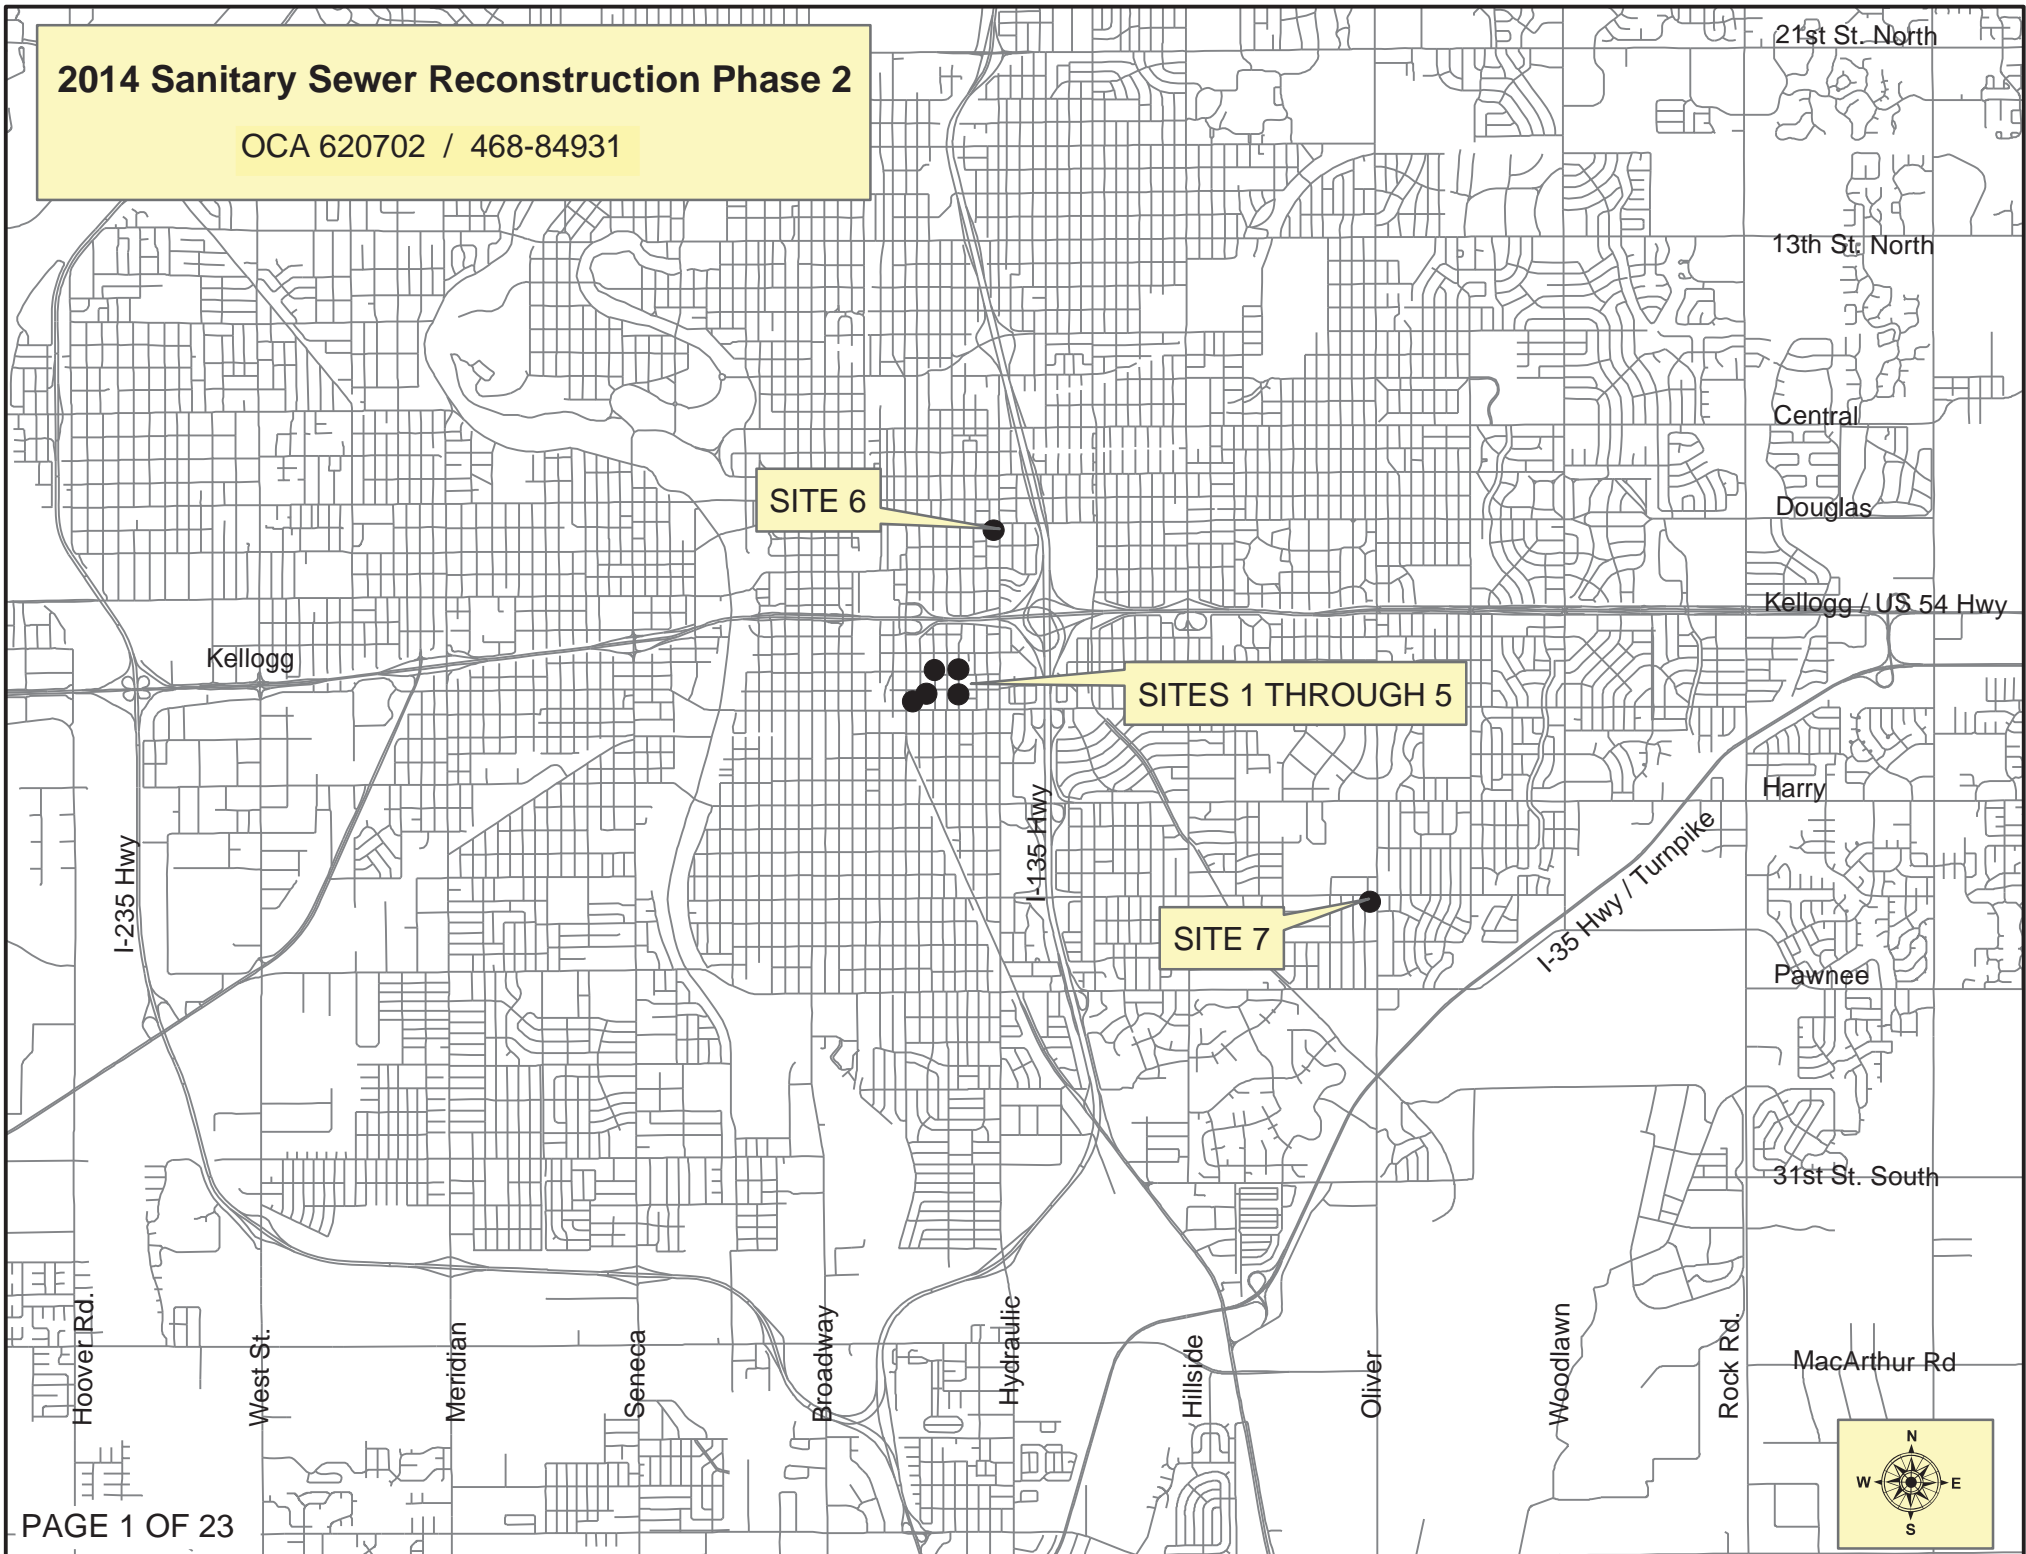

2014 Sanitary Sewer Reconstruction Phase 2

468-84931

<u>SITE NO.</u>	<u>GENERAL LOCATION</u>	<u>PIPE SIZE</u>	<u>UPSTREAM MANHOLE</u>	<u>DOWNSTREAM MANHOLE</u>	<u>RECORD UPSTREAM INVERT ELEVATION</u>	<u>RECORD DOWNSTREAM INVERT ELEVATION</u>	<u>LENGTH</u>
1	In Lulu Street, north of Gilbert Street	8" 8"	5546-628 5546-627		Manhole Work Manhole Work		
2	In Lulu Street, south of Morris Street	8"	5546-624		Manhole Work		
3	Alley between Ida and Laura Streets, from Morris to Lincoln	8"	5546-594 5546-593 5546-592		Manhole Work Manhole Work Manhole Work		
4	Alley between Washington and Ida, north of Lincoln	8" 8"	5546-586 5546-584	5546-585	1287.44 Manhole Work	1287.15	195
5	In Laura Street, from north of Gilbert to south of Gilbert	8" 8"	5546-605 5546-605 5546-603	5546-604	Manhole Work N/A Manhole Work	1287.66	27
6	Alley south of Douglas, between Greenwood and Hydraulic	8"	5547-413 5547-no number 5547-409		Manhole Work Manhole Work Manhole Work		
7	Easement between Oliver and Dellrose, south of Mt. Vernon Rd.	8"	5745-114	5745-113	1303.85	1301.67	352
						Total Linear Feet =	574

Bid Items by Site Reference

2014 Sanitary Sewer Reconstruction Phase 2

<u>Item</u>	<u>Site 1</u>	<u>Site 2</u>	<u>Site 3</u>	<u>Site 4</u>	<u>Site 5</u>	<u>Site 6</u>	<u>Site 7</u>	<u>Totals</u>	
<u>Lump Sum Items:</u>									
Pipe, SS 8"				195	27		352	574	lf
Pipe Removed (8")				193	27		352	572	lf
MH Frame & Cover, Replaced			1				1	2	ea
MH Frame & Cover, Replaced (in pavement)			1			1		2	ea
MH Adjusted w/ New Ring & Cover (<6")							1	1	ea
MH Bench & Invert, Removed & Replaced			1	1				2	ea
MH Abandoned (in pavement)					1	2		3	ea
MH Removed	2	1	1	1	2			7	ea
MH Removed (oversized) (Site 4)				1				1	ea
MH, Shallow SS (4')					1			1	ea
MH, Shallow SS (4') (in pavement)	2	1			1			4	ea
MH, Standard SS (4')			1	2				3	ea
Service Connection Replaced (relocated) (Site 7)							1	1	ea
Concrete Pavement Removed & Replaced (incl curb/gutter)					35			35	lf
Fill, Sand (flushed & vibrated)					27			27	lf
Site Clearing								1	LS
Site Restoration								1	LS
<u>Measured Quantity Items:</u>									
Service Reconnection, Sewer (4")				4	1		8	13	ea
Service Reconnection, Sewer (6")							1	1	ea
BMP, Curb Inlet Protection					1			1	ea
BMP, Erosion Control Mat							30	30	sy
BMP, Silt Fence							20	20	lf