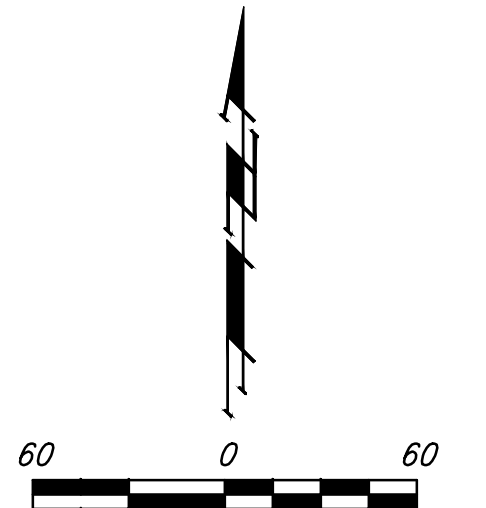



Building to remain.
Contractor to ensure
drainage from building
to inlet.


Remove existing
RCP.


Abandon well by filling
with concrete and
capping.


Contractor to remove
existing gate, wall,
irrigation control
valves, & keypad.
Coordinate removal of
electric boxes with
electric company.



 Indicates tree to be removed by contractor. To be paid for as lump sum bid item "Site Clearing"

 Boundary of tree clearing

 Areas to remove existing gravel road to a depth of 12". Replace with on-site material for a depth of 6" and 6" of topsoil. Gravel excavated may be used for street fills.

	The Ranch Addition CLEARING PLAN COMPACTION PLAN STORM WATER DRAIN #391	
	<small>Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-2771 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>	
PROJECT NUMBER 468-84291	DESIGN AEG	DRAWN JAK/TMS
REVISIONS:	APPROVED DATE 01/14	SCALE Noted SHEET
		28 OF 40
<small>SWD PLANS.dwg</small>		<small>12-11-E840</small>