


PRINTS ISSUED		
DATE	PURPOSE	NO.
04.29.13	FIELD CHECK	
05.31.13	OFFICE CHECK	
12.23.13	FOR BID	

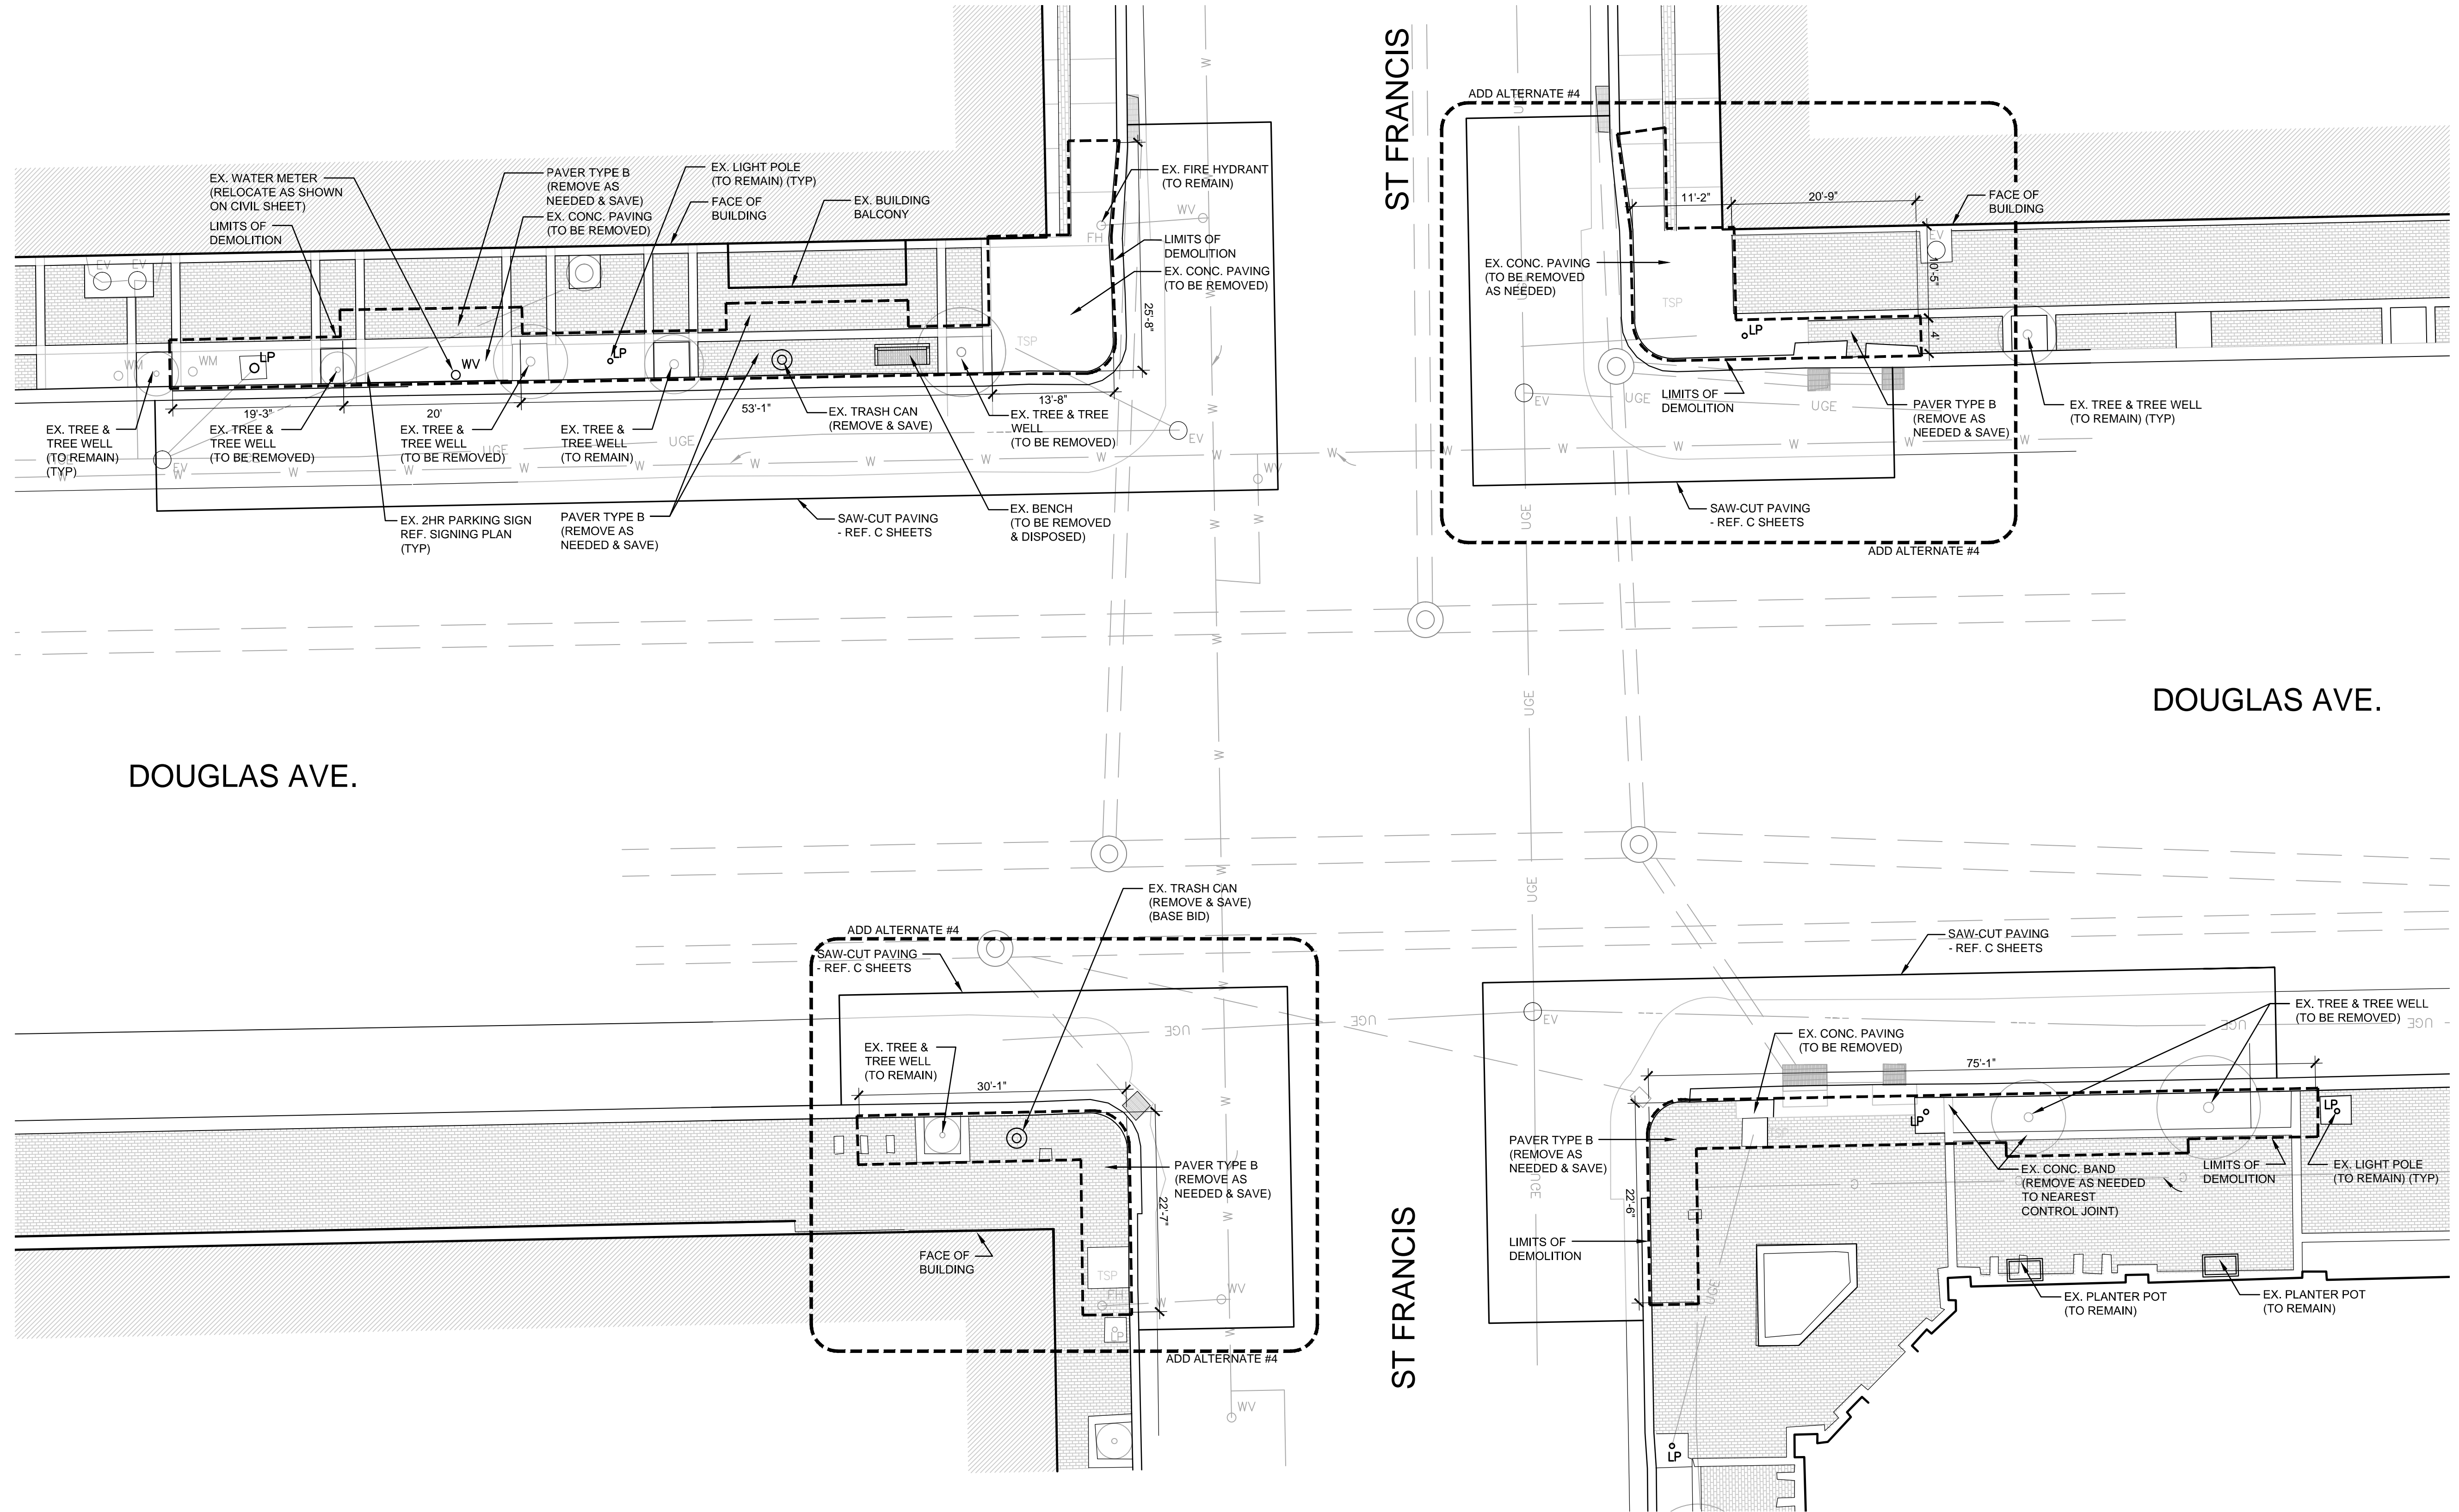

D SIDEWALK DEMOLITION PLAN

1"=10'-0"

- NOTE:**
- ALL HARDSCAPE REMOVAL FROM BACK OF CURB TO CENTERLINE OF ROAD - REFER TO CIVIL DRAWINGS.
 - CONCRETE CURB REMOVAL - REFER TO CIVIL SHEETS.
 - STORM SEWER ADJUSTMENT - REFER TO CIVIL SHEETS FOR SWS LINE AND INLET ADJUSTMENTS.
 - VALVES, METERS, AND VAULTS - TO REMAIN IN PLACE UNLESS OTHERWISE SPECIFIED.
 - STRIPING REMOVAL - REFER TO CIVIL SHEETS.
 - SIDEWALK CONCRETE REMOVAL - SAW-CUT ALL EDGES AT NEAREST CONTROL JOINT BEYOND INDICATED LIMITS
 - PAVER REMOVAL - PULL PAVERS & BASE MATERIAL (SEE PAVER SCHEDULE FOR ASSUMED BASE) (NOTIFY LANDSCAPE ARCHITECT IF OTHER BASE MATERIAL IS FOUND).
 - LIMITS OF DEMOLITION WORK TO BE APPROXIMATELY 8LF FROM BACK-OF-CURB AT CURB RAMP LOCATION, 8LF FROM BACK-OF-CURB AT BUS SHELTER LOCATIONS, & 5LF FROM BACK-OF-CURB IN ALL OTHER LOCATIONS NOT OTHERWISE INDICATED.

DOUGLAS AVE. BUS
 FACILITY IMPROVEMENTS
 (472-85080)
 WICHITA, KS

LawKingdon Architecture
 Engineering · Planning · Interiors · Landscapes

LawKingdon Inc. ©
 345 RIVERVIEW WICHITA, KS 67203
 Phone (316) 268-0230 Fax: (316) 268-0205

CONTACT: Jeffrey A. Best, ASLA

PROJECT NUMBER:
12856

SHEET TITLE:
SIDEWALK DEMOLITION PLAN

SHEET NUMBER:
DE1.4