
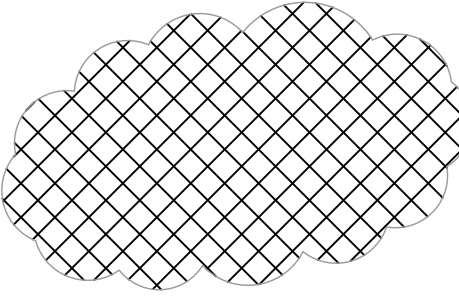


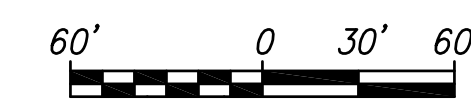


NOTES:

1. Storm Water Contractor shall remove and dispose of existing structures and trees marked for removal as indicated on this sheet.
2. Trees marked for removal on this sheet shall be removed prior to April 30, 2015.
3. Abandoned Water Well to be properly plugged per KDHE requirements. A well plugging report shall be fill out and filed with KDHE within 30 days.
4. Contractor shall work around existing utilities that currently serve the existing house. This includes both overhead and buried electric lines, A.T.&T. Phone lines and any additional utilities that may not be shown.
5. All trash, debris, trees, structures and other miscellaneous items within the gradind limits shall be removed by the stormwater contractor. Incidental to Site Clearing.
6. Access to existing home shall be maintained throughout construction. Any temporary drive access shall meet fire department requirements.

LEGEND

-  Tree to be removed
-  Trees to be removed
-  Structure to be removed
-  Construction/Grading Limits



BENCHMARK:
CHISELED SQUARE ON THE TOP OF CURB ON
THE NORTH SIDE OF ZIMMERLY STREET, WEST
OF 127TH STREET EAST,

ELEVATION = 1329.39 (NAVD88)

The Steppes at Ark Valley Site Clearing Plan		DATE 3/10/2015
 RUGGLES & BOHM		DESIGN KL
ENGINEERING SURVEYING LANDSCAPE ARCHITECTURE GOVERNMENT 924 NORTH MAIN WICHITA, KANSAS 67203 P (316) 264-8008 F (316) 264-4621 WWW.RBKANSAS.COM		DRAWN DRS
PROJECT NUMBER 468-84980	RB JOB NO. 4372E	REVIEW 2/17/2015
DRAWING FILE 4372E Engineering Base [Site Clearing Plan]	DWG. SCALE ...	SHEET 2
		OF 21