
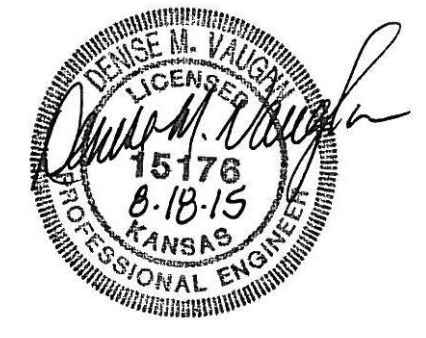


EXCAVATION				COMAPCTED FILL				LOOSE FILL			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
4+17.75	32.24	0.00	0.00	4+17.75	1.77	0.00	0.00	4+17.75	2.02	0.00	0.00
4+53.00	31.66	41.72	41.72	4+53.00	4.44	4.06	4.06	4+53.00	9.47	7.50	7.50
4+75.00	48.58	32.70	74.42	4+75.00	0.00	1.81	5.87	4+75.00	4.32	5.62	13.12
4+76.00	50.77	1.84	76.26	4+76.00	0.00	0.00	5.87	4+76.00	3.21	0.14	13.26
5+00.00	58.13	48.40	124.65	5+00.00	0.00	0.00	5.87	5+00.00	0.01	1.43	14.69
5+24.00	47.61	46.99	171.64	5+24.00	0.00	0.00	5.87	5+24.00	3.72	1.66	16.35
5+25.00	45.67	1.73	173.37	5+25.00	0.00	0.00	5.87	5+25.00	5.06	0.16	16.51
5+47.00	34.16	32.52	205.89	5+47.00	3.32	1.35	7.22	5+47.00	4.44	3.87	20.38
6+00.00	37.01	69.86	275.75	6+00.00	1.73	4.96	12.18	6+00.00	1.92	6.25	26.63
6+50.00	25.69	58.06	333.82	6+50.00	3.62	4.96	17.13	6+50.00	2.92	4.48	31.11
7+00.00	16.13	38.72	372.54	7+00.00	6.29	9.17	26.31	7+00.00	9.10	11.12	42.23
7+50.00	2.79	17.52	390.06	7+50.00	23.99	28.04	54.34	7+50.00	26.00	32.50	74.73
7+63.06	0.24	0.73	390.79	7+63.06	35.18	14.31	68.65	7+63.06	32.75	14.21	88.93

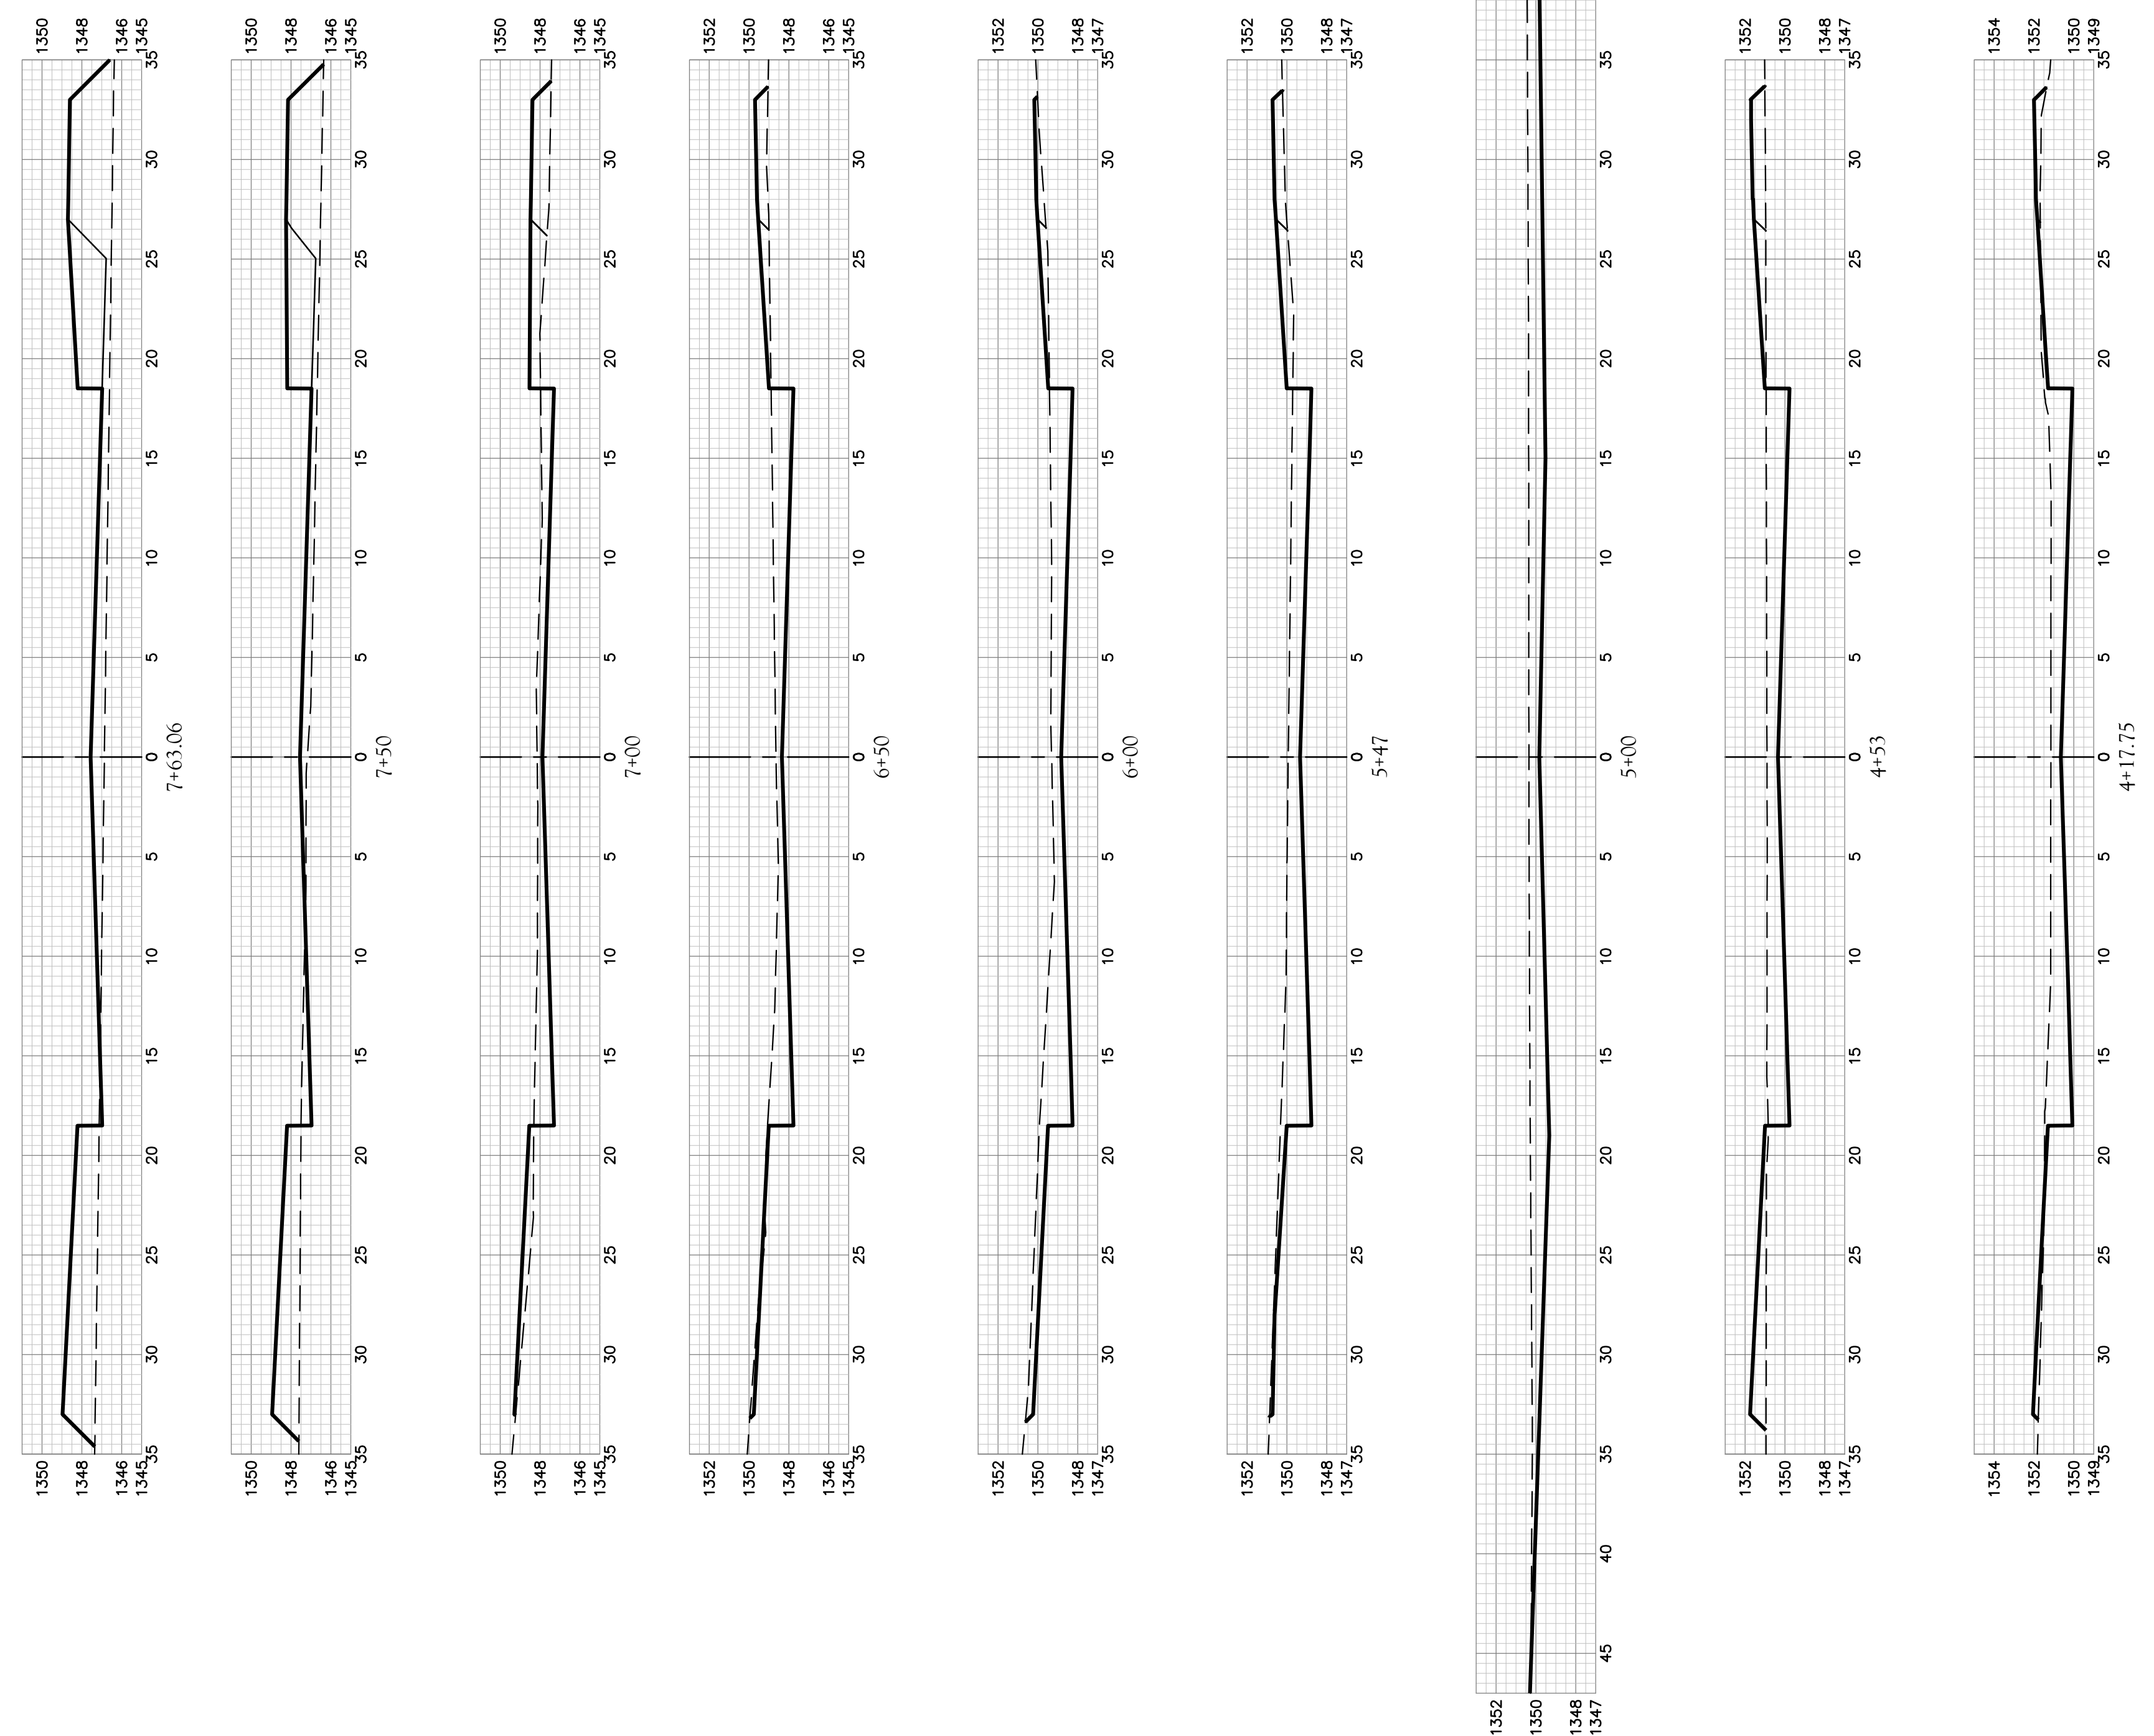

MANTANE