
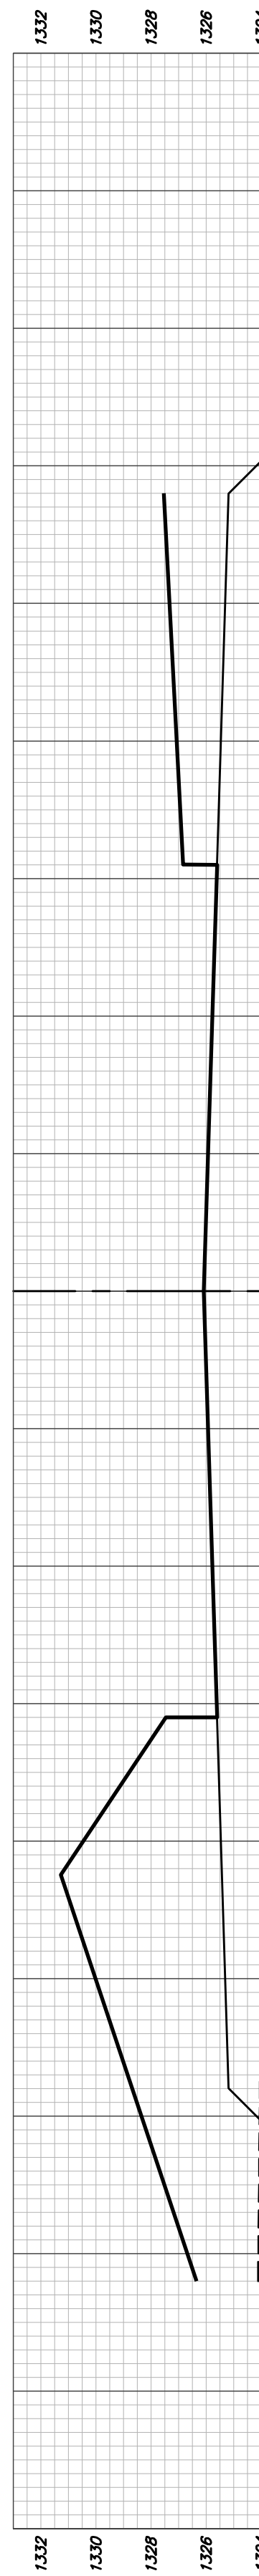
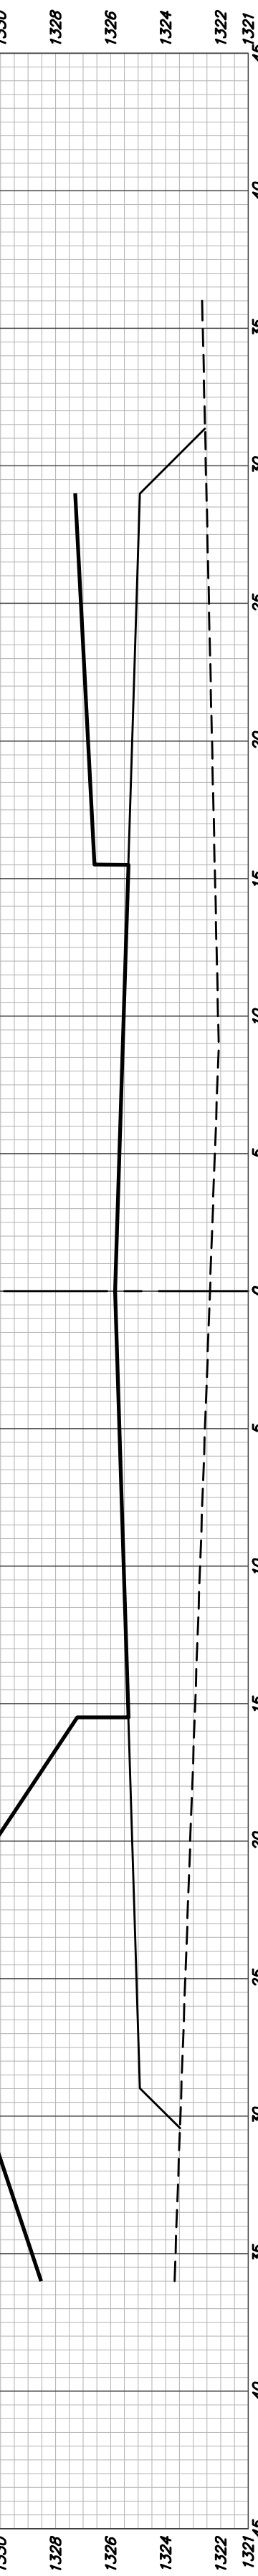
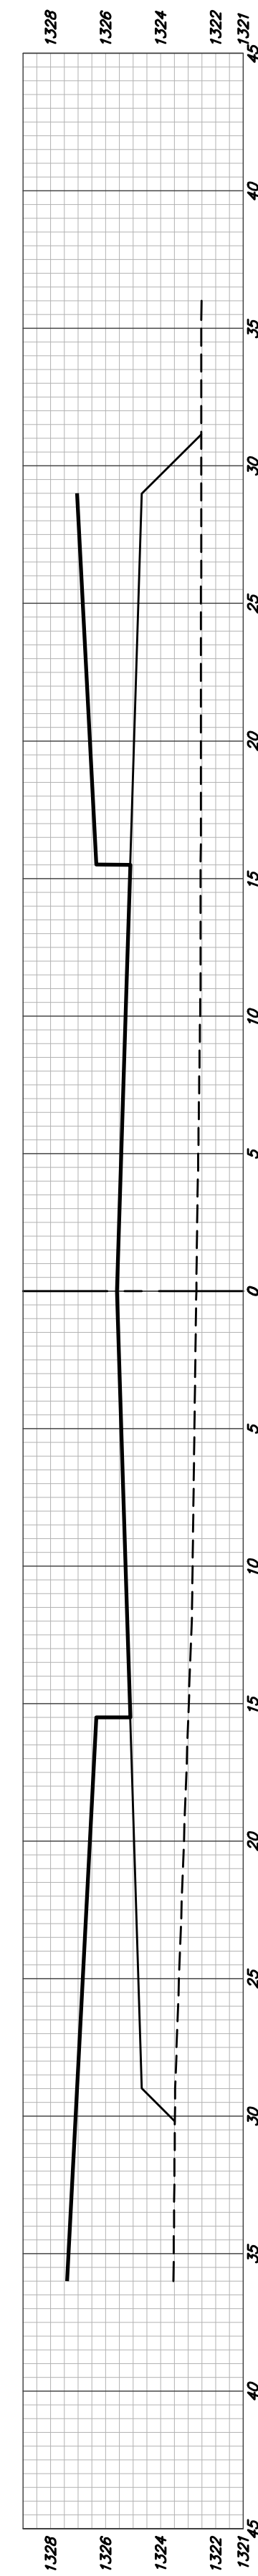
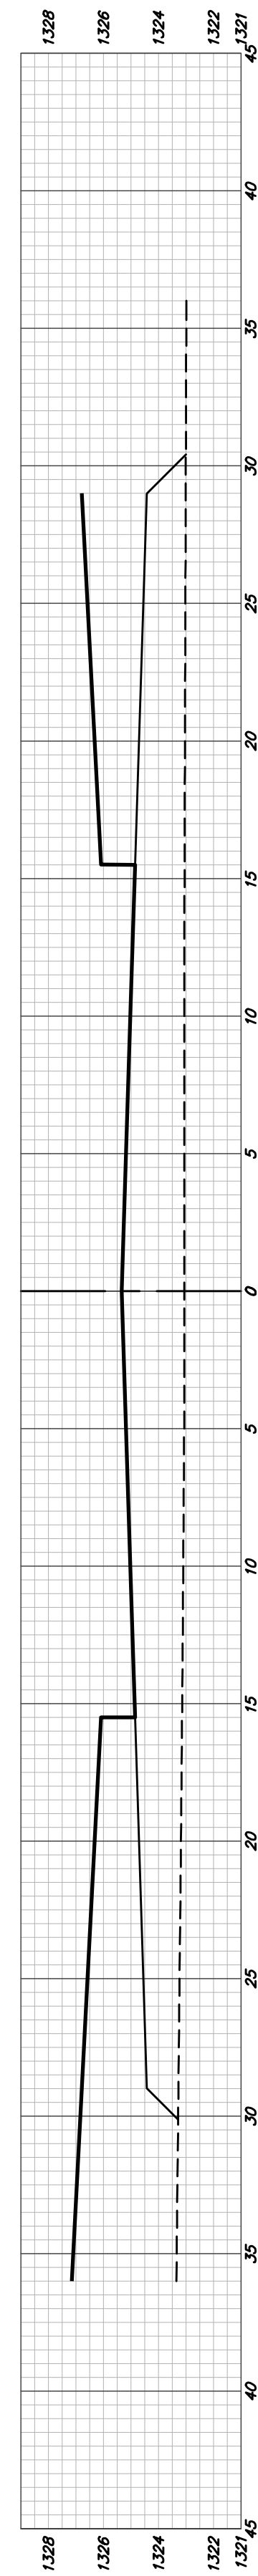
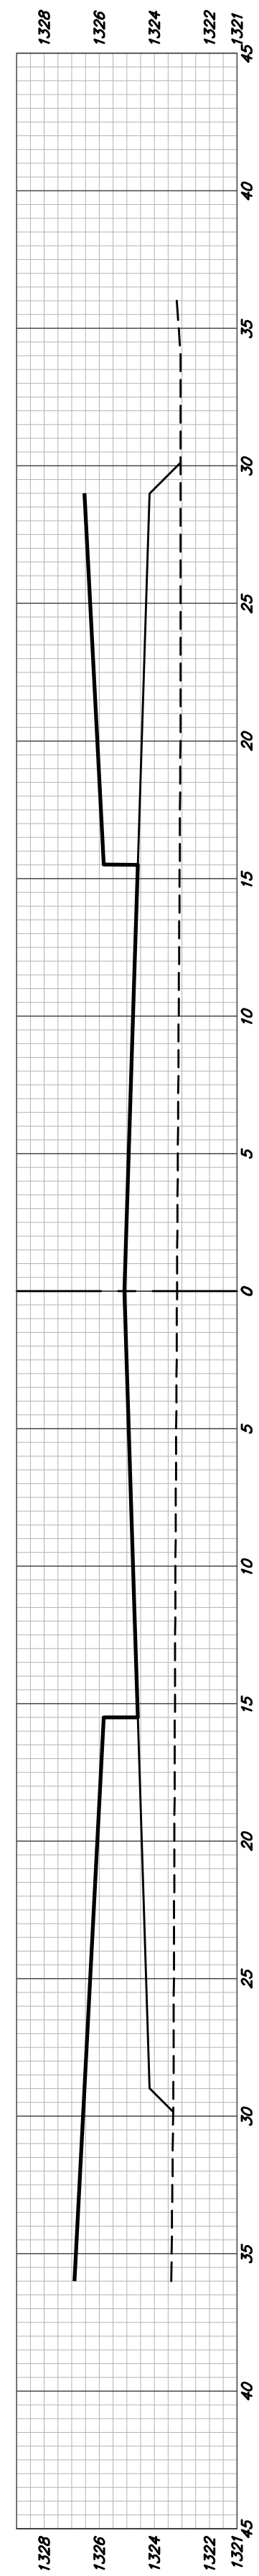


CURTIS ST

WAVECREST CIR

Excavation (CY Unadjusted)			Compacted Fill (CY Unadjusted)			Loose Fill (CY Unadjusted)		
Station	Area	Volume	Station	Area	Volume	Station	Area	Volume
0+23.20	78.02	0.00	0+23.20	0.00	-0+23.20	0.00	0.00	0.00
0+30.00	128.92	89.18	0+30.00	0.00	0+00.00	0.00	0.00	0.00
0+50.00	243.39	344.07	0+50.00	0.00	0+50.00	0.00	0.00	0.00
1+00.00	295.25	498.20	1+00.00	0.00	1+00.00	0.00	0.00	0.00
1+07.28	285.39	78.23	1+07.28	0.00	1+07.28	0.00	0.00	0.00
1+39.49	377.56	362.06	1+39.49	0.00	1+39.49	0.00	0.00	0.00
1+68.46	259.14	311.22	1+68.46	0.00	1+68.46	0.00	0.00	0.00
1+82.03	261.86	130.65	1+82.03	0.00	1+82.03	0.00	0.00	0.00
1+95.61	305.27	142.51	1+95.61	0.00	1+95.61	0.00	0.00	0.00
2+24.93	381.27	374.95	2+24.93	0.00	2+24.93	0.00	0.00	0.00
2+55.40	385.30	433.30	2+55.40	0.00	2+55.40	0.00	0.00	0.00
3+00.00	420.97	665.91	3+00.00	0.00	3+00.00	0.00	0.00	0.00
3+52.90	379.36	780.33	3+52.90	0.00	3+52.90	0.00	0.00	0.00
3+89.85	362.05	507.40	3+89.85	0.00	3+89.85	0.00	0.00	0.00
4+30.62	268.49	476.09	4+30.62	0.00	4+30.62	0.00	0.00	0.00
5+00.00	207.15	611.09	5+00.00	0.00	5+00.00	0.00	0.00	0.00
6+00.00	165.75	345.28	6+00.00	0.00	6+00.00	0.00	0.00	0.00
6+50.00	47.81	138.83	6+50.00	0.39	6+50.00	2.32	2.45	2.45
7+00.00	29.88	71.94	7+00.00	2.95	7+00.00	3.41	7+00.00	11.70
7+50.00	39.90	64.61	7+50.00	1.37	7+50.00	6.13	16.51	31.94
8+00.00	69.86	101.63	8+00.00	0.00	8+00.00	2.04	7.56	39.50
8+50.00	72.84	144.54	8+50.00	0.00	8+50.00	1.08	2.70	42.21
9+00.00	68.58	131.54	9+00.00	0.00	9+00.00	0.00	0.71	42.92
9+50.00	89.36	146.24	9+50.00	0.00	9+50.00	0.00	0.00	42.92
10+00.00	104.64	178.74	10+00.00	0.00	10+00.00	0.00	0.00	42.92
11+00.00	64.26	154.74	11+00.00	1.09	11+00.00	0.19	0.20	43.12
11+50.00	6.97	65.96	11+50.00	10.71	11+50.00	20.83	11+50.00	24.95
12+00.00	0.15	6.60	12+00.00	26.11	12+00.00	54.93	12+00.00	37.18
12+50.00	0.00	0.14	12+50.00	40.16	12+50.00	116.29	12+50.00	40.28
13+00.00	2.00	1.86	13+00.00	16.51	13+00.00	168.76	13+00.00	30.36
13+50.00	42.43	41.15	13+50.00	3.77	13+50.00	187.53	13+50.00	4.70
14+05.07	222.47	270.16	14+05.07	0.00	14+05.07	3.84	14+05.07	0.00
14+10.57	201.07	43.14	14+10.57	0.00	14+10.57	0.00	14+10.57	0.00
14+34.82	258.81	205.01	14+34.82	0.00	14+34.82	0.00	14+34.82	0.00
14+54.87	412.10	90.06	14+54.87	0.00	14+54.87	0.00	14+54.87	0.00
14+60.37	408.91	80.85	14+60.37	0.00	14+60.37	0.00	14+60.37	0.00
14+79.73	374.80	253.39	14+79.73	0.00	14+79.73	0.00	14+79.73	0.00
14+99.30	279.88	221.33	14+99.30	0.00	14+99.30	0.00	14+99.30	0.00
15+04.80	243.36	53.05	15+04.80	0.00	15+04.80	0.00	15+04.80	0.00
15+15.80	223.58	95.12	15+15.80	0.00	15+15.80	0.00	15+15.80	0.00
15+22.80	137.39	46.79	15+22.80	0.00	15+22.80	0.00	15+22.80	0.00

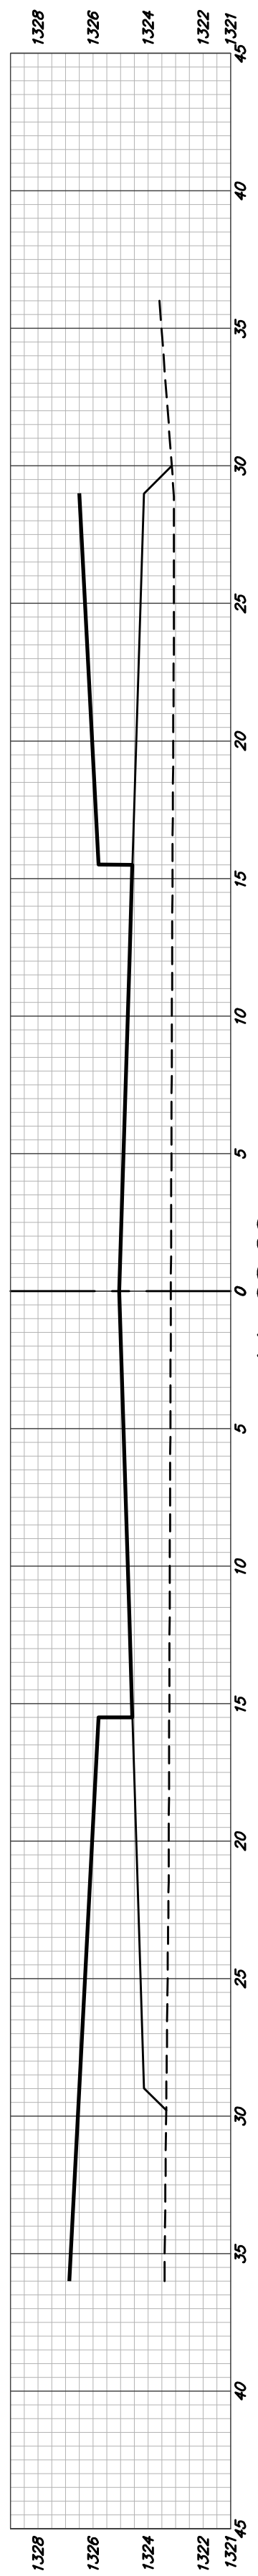

Excavation (CY Unadjusted)			Compacted Fill (CY Unadjusted)			Loose Fill (CY Unadjusted)		
Station	Area	Volume	Station	Area	Volume	Station	Area	Volume
0+62.27	229.23	0.00	0+62.27	0.00	0.00	0+62.27	0.13	0.00
1+00.00	221.60	315.00	1+00.00	0.00	0.00	1+00.00	65.97	46.19
1+50.00	235.61	423.34	1+50.00	0.00	0.00	1+50.00	78.44	133.72
2+00.00	221.09	431.75	2+00.00	0.00	0.00	2+00.00	86.39	318.27
2+50.00	169.02	353.27	2+50.00	0.00	0.00	2+50.00	79.78	164.62
3+00.00	53.19	204.20	3+00.00	0.00	0.00	3+00.00	89.76	158.73
3+50.00	22.33	69.92	3+50.00	0.00	0.00	3+50.00	81.38	158.46
4+00.00	32.20	50.49	4+00.00	0.00	0.00	4+00.00	65.58	136.07
4+50.00	30.37	57.93	4+50.00	0.00	0.00	4+50.00	52.09	108.95
5+00.00	53.56	77.60	5+00.00	0.00	0.00	5+00.00	47.51	92.23
6+00.00	79.81	123.49	6+00.00	0.00	0.00	6+00.00	34.93	67.35
6+50.00	70.34	139.03	6+50.00	0.00	0.00	6+50.00	48.04	76.83
7+00.00	48.19	109.75	7+00.00	0.00	0.00	7+00.00	55.75	96.10
7+50.00	27.99	70.54	7+50.00	0.00	0.00	7+50.00	63.39	110.31
8+00.00	4.60	30.18	8+00.00	0.00	0.00	8+00.00	80.23	132.88
8+50.00	0.00	4.26	8+50.00	0.00	0.00	8+50.00	99.23	166.17
9+00.00	0.00	0.00	9+00.00	0.00	0.00	9+00.00	108.47	192.32
9+50.00	0.00	0.00	9+50.00	0.00	0.00	9+50.00	107.45	198.92
10+00.00	0.00	0.00	10+00.00	0.00	0.00	10+00.00	106.22	197.84
10+50.00	0.00	0.00	10+50.00	0.00	0.00	10+50.00	103.13	193.85
11+00.00	0.00	0.00	11+00.00	0.00	0.00	11+00.00	103.97	191.76
12+00.00	0.00	0.00	12+00.00	0.00	0.00	12+00.00	105.93	202.35
12+50.00	0.00	0.00	12+50.00	0.00	0.00	12+50.00	140.44	274.84
13+00.00	0.00	0.00	13+00.00	0.00	0.00	13+00.00	73.71	237.06
13+50.00	0.00	0.00	13+50.00	0.00	0.00	13+50.00	73.35	141.39
14+00.00	0.00	0.00	14+00.00	0.00	0.00	14+00.00	71.64	134.25
14+08.20	0.00	0.00	14+08.20	83.75	25.72	14+08.20	71.31	21.70