GENERAL NOTES:

1. The Contractor shall comply with all applicable safety regulations. All construction shall be completed following current City Standard Specifications and Special Provisions.

2. Contractor will be required to provide notice to utility companies a minimum of seventy–two (72) hours prior to any excavation, as follows:

   Kansas One–Call 687–2470

   The Contractor must notify the following in case of an emergency:

Cox Communications	316–260–7195
Kansas Gas Service	1–888–482–4950
Black Hills Energy	316–941–1628
Westar	316–383–8600
AT&T	1–800–286–8313
City of Wichita Water Department	316–262–6000
City of Wichita Sewer Maintenance	316–262–6000
City of Wichita Stormwater	316–268–4090
City of Wichita Traffic	316–268–4034

   Utility service lines, poles, etc. are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the Right–of–Way which do not conflict with proposed construction.

3. Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.

4. Trees and shrubs in public Right–of–Way which are in direct conflict with proposed new construction shall be removed by the Contractor with the Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.

5. The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days notice prior to start of construction.

6. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re–establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re–established by a licensed land surveyor in accordance with state laws.

7. The Water Distribution Division shall field locate water valves one time during construction when requested by the Contractor. It shall be the Contractor's responsibility to preserve such field locations during the construction process. Water valves, valve boxes or fire hydrants damaged during construction shall be repaired by the Contractor at his own expense. Valve boxes and water meters within the project limits shall be adjusted to match field grades.+

8. If traffic is impacted by construction, a traffic control plan must be submitted and approved by the City Traffic Engineer, Brian Coon at traffic@wichita.gov before construction can begin. The Contractor shall be responsible for all traffic control measures to facilitate construction. All construction zone markings and signage shall conform to the latest version of the Manual on Uniform Traffic Control Devices (MUTCD) as published by the US Dept. of Transportation, Federal Highway Administration. All costs associated with construction markings and signage shall be the Contractors responsibility.

10. All elevations shown are NAVD 88.

11. All areas disturbed during construction that will not be under proposed pavement shall be restored to match existing conditions.

12. All existing pavement and curb and gutter within the construction limits shall be saw cut, full depth, to the lines shown on the plans, or to the nearest joint, and removed, unless otherwise noted. If removal limits are within three feet of a joint, remove to the joint.

13. All traffic control devices in the work zone (including markings and signs) and their installation and maintenance shall comply with the latest edition of the Manual on Uniform Traffic Control Devices (MUTCD). All traffic control devices in the traveled way or clear zone shall be crashworthy (NCHRP Report 350 or MASH compliant).

http://safety.fhwa.dot.gov/roadway_dept/policy_guide/road_hardware/wzd

14. All construction equipment, including vehicles, materials, and debris, shall be stored outside of the clear zone. Where this cannot be achieved the contractor shall place appropriate signs, abject identifiers, and/or barricades in compliance with the MUTCD.

15. Except when required for safety, traffic control shall not block any lanes or sidewalks when work is not being performed.

16. The Contractor shall protect from damage and support existing utilities through construction as approved by the utility owner and the Engineer at the contractor's expense.

17. Contractor shall limit the extent of trench openings overnight and weekends to less than 50 feet.

18. Any sidewalk, drive, approach, curb, or street pavement removed to construct the project must have a pavement cut permit and be replaced by the City contractor. Permits can be obtained by calling 316–268–4501 or 316–268–4480.

Benchmark

BENCHMARK:
POINT #30
CHISELED SQUARE ON THE TOP OF CURB ON THE SOUTH SIDE OF AUTUMN RIDGE, 98' EAST OF THE EAST LINE OF CHERYL'S HOLLOW 2ND ADDITION.
ELEVATION = 1364.26 (NAVD88)

BENCHMARK:
POINT #31
CHISELED SQUARE ON THE TOP OF CURB AT THE WEST CURB RETURN AT THE NORTHWEST CORNER OF HUNTER'S VIEW AND STOUT.
ELEVATION = 1364.76 (NAVD88)

PAVING IMPROVEMENTS
to serve
Cheryl's Hollow, 2nd Addition
CITY OF WICHITA, KANSAS

Gary Janzen, P.E. City Engineer
Project Number 472-84412
O.C.A. NO. 766365

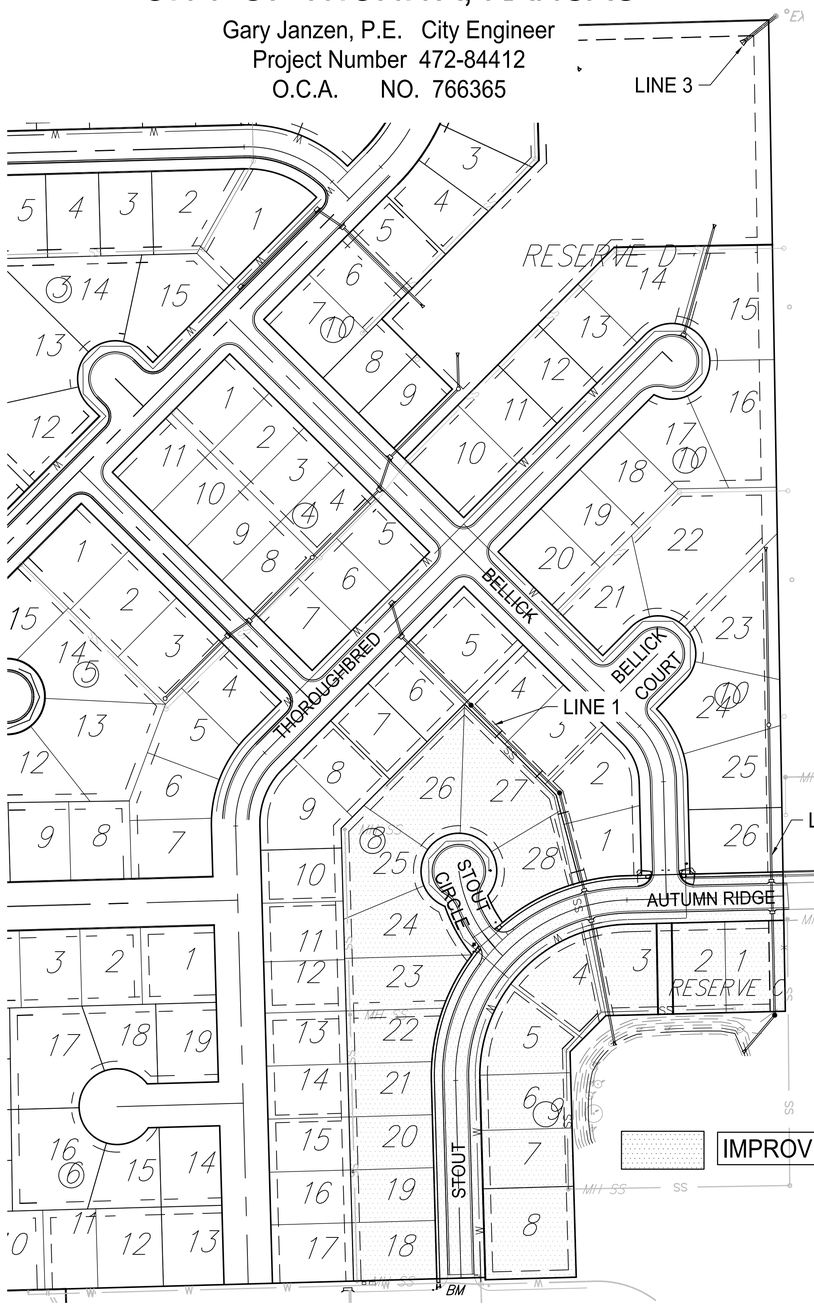

PROJECT LOCATION

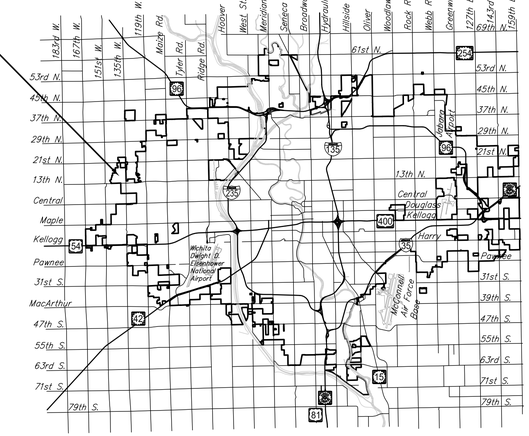

Sheet Index

1.	TITLE SHEET
2.–6.	PAVING DETAILS
7.–9.	PAVING PLAN & PROFILES
10.–11.	STORM SEWER DETAILS
12.–15.	STORM SEWER PLAN & PROFILES
16.	EROSION CONTROL PLAN
17.–21.	EROSION CONTROL DETAILS
22.	FOUR–CORNER GRADING PLAN
23.–30.	CROSS–SECTIONS
31.–32.	BUBBLE MAPS
33.	PLAT

60' 0 30' 60'

KENNETH W. LEE LICENSED 15373 9-20-16 KANSAS PROFESSIONAL ENGINEER

EARTHWORK QUANTITIES	
Description	Cu. Yds.
Cut	2410
Fill	559
Net (Cut)	1851

September 2016

PLANS PREPARED BY
RUGGLES & BOHM
ENGINEERING | SURVEYING | LANDSCAPE ARCHITECTURE | GOVERNMENT
924 NORTH MAIN WICHITA, KANSAS 67203 P (316) 264-8008 F (316) 264-4621
WWW.RBKANSAS.COM

4731E