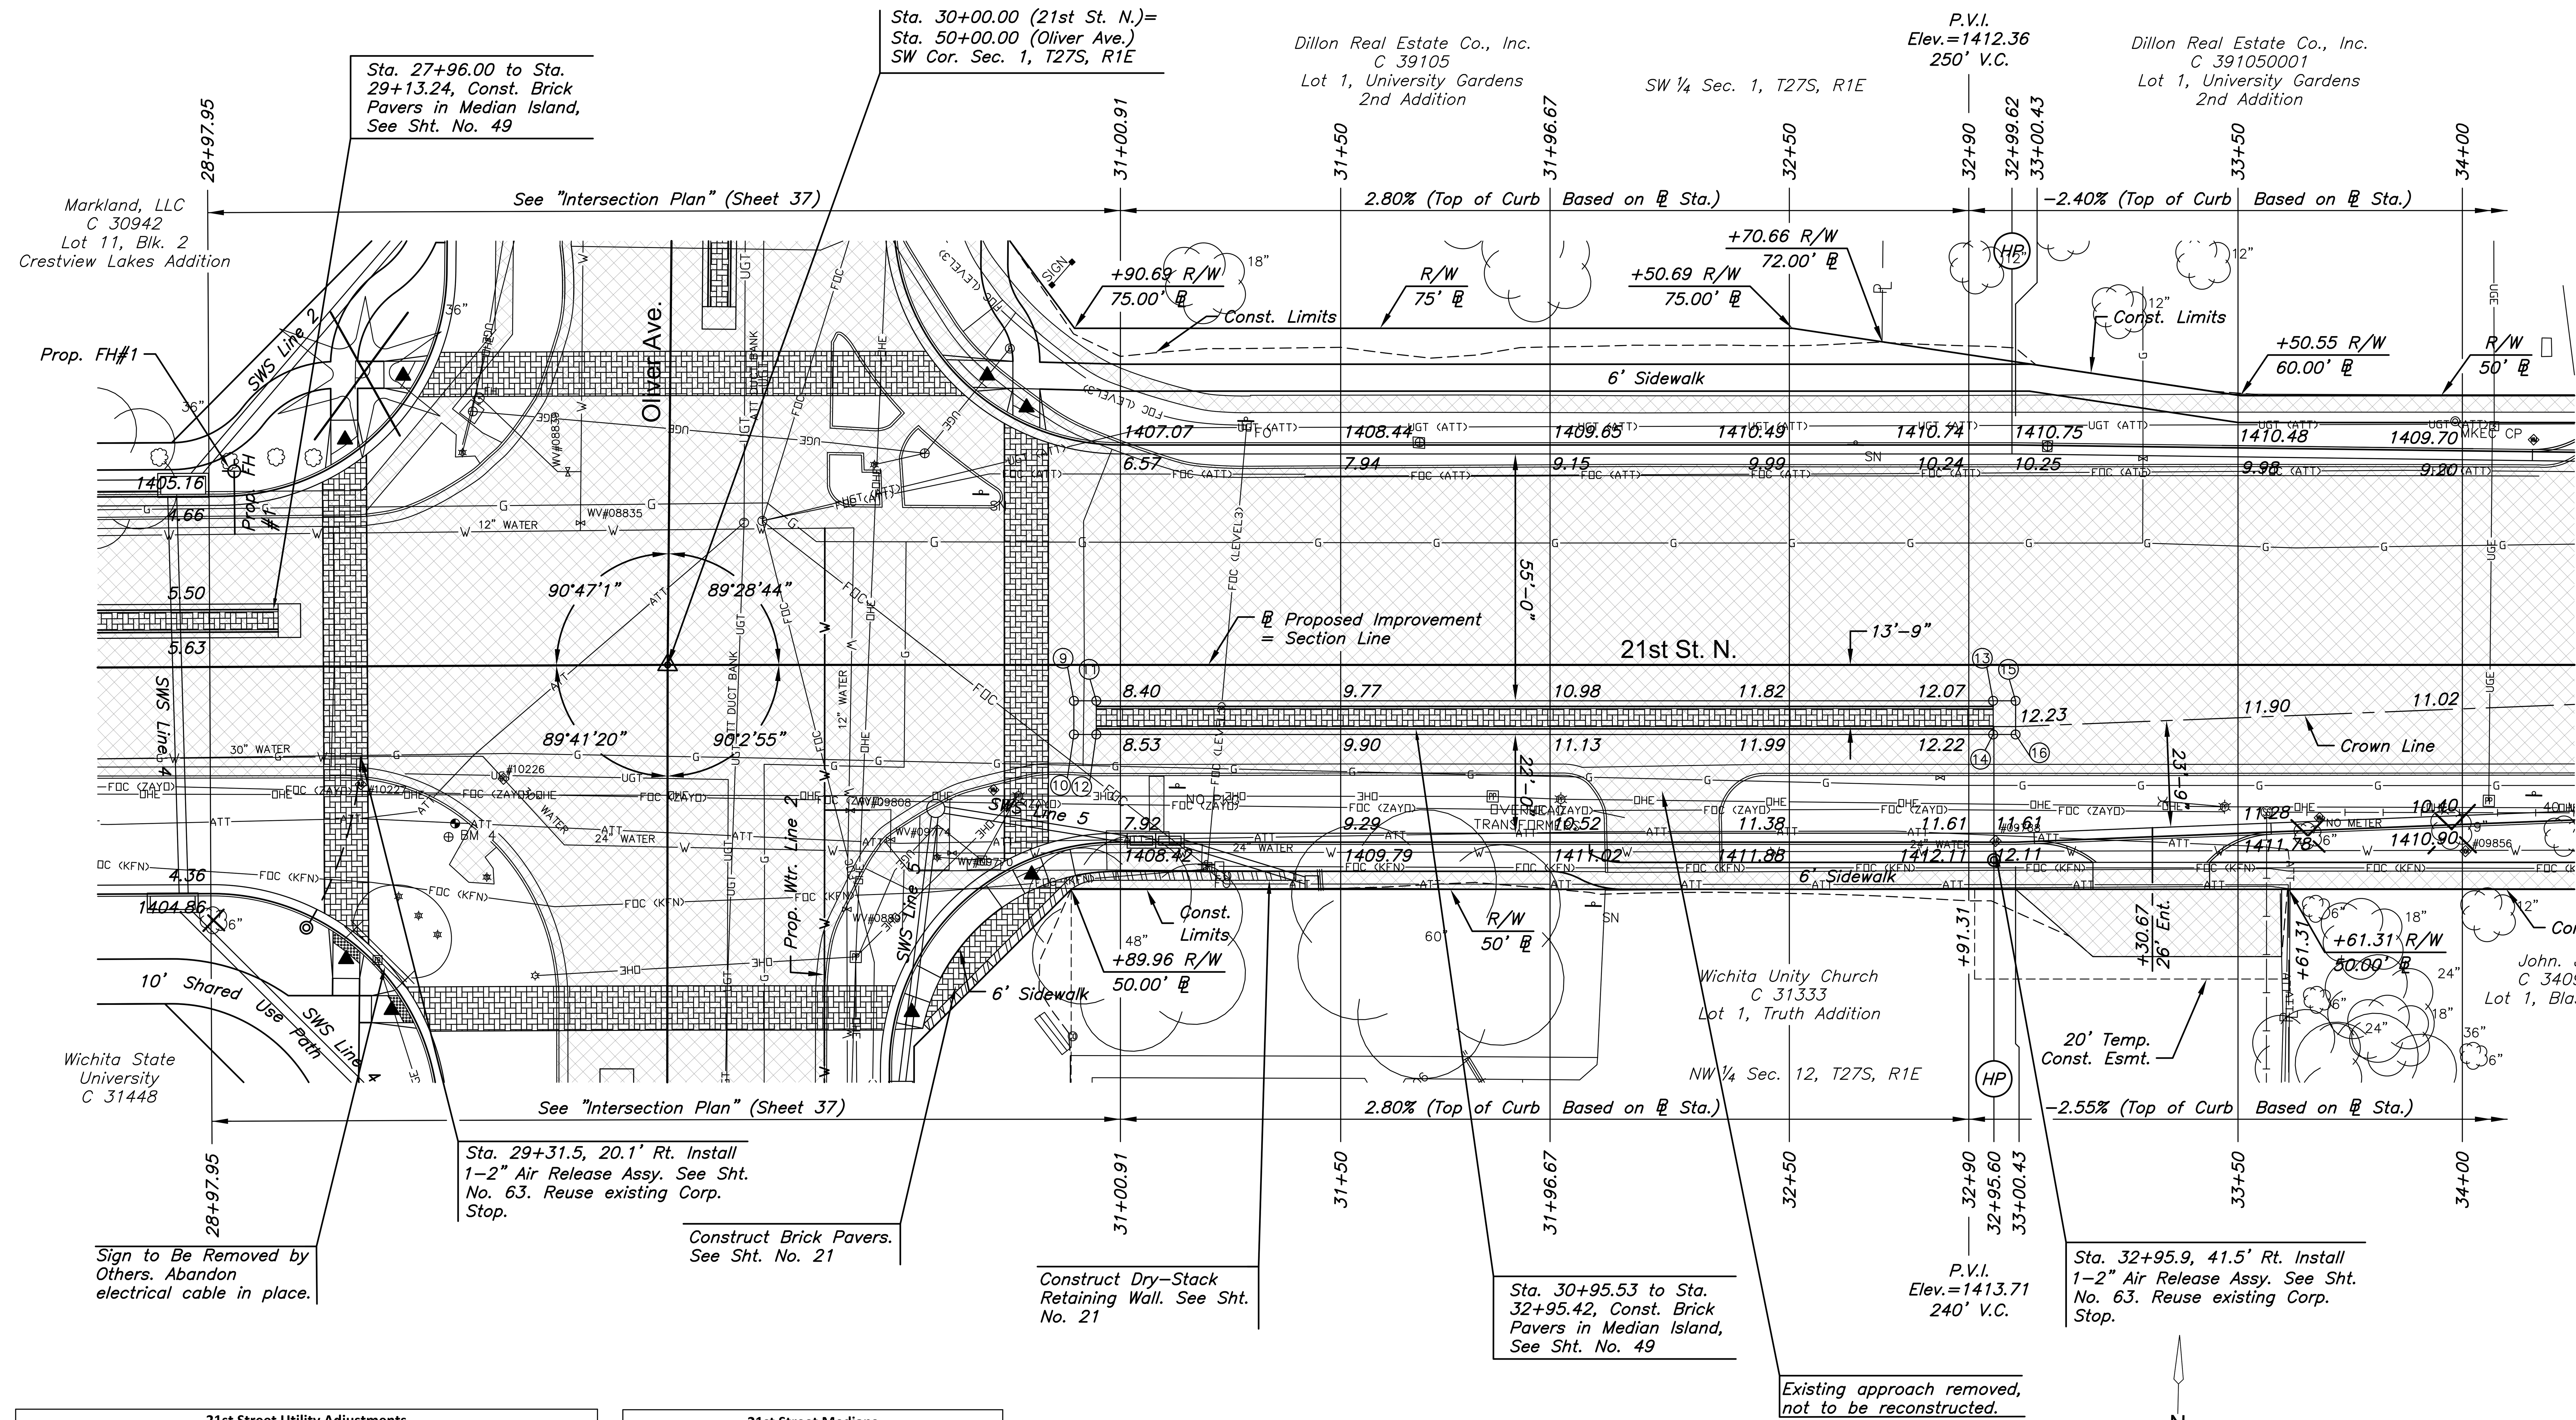

21st Street Utility Adjustments				
Station	Offset	Exist. Elev.	Prop. Elev.	Description
29+63.29	25.20' Rt.	1405.89	1406.29	Valve Box Adjusted (Blowoff)
29+80.72	31.73' Lt.	1405.79	1406.08	Valve Box Adjusted
30+17.03	31.69' Lt.	1406.09	1406.16	Manhole Adjusted (AT&T)
30+21.10	32.09' Lt.	1406.08	1406.17	Manhole Adjusted (AT&T)
30+49.69	38.91' Rt.	1406.76	1406.91	Valve Box Adjusted
30+63.38	41.92' Rt.	1407.29	1407.09	Valve Box Adjusted
30+72.66	27.89' Rt.	1407.79	-	Water Meter Relocated
33+56.38	32.81' Rt.	1412.53	1411.4	Manhole Adjusted w/New Ring & Cover
33+68.18	34.11' Rt.	1411.66	-	Water Meter Relocated, Special

*Station and offset for meter relocations are at the existing meter location. Proposed location to be field verified.

21st Street Medians				
Point No.	Station	Offset	Elevation	
			Flowline	Top Curb
9	30+90.53	8.00' Rt.	1408.10	1408.10
10	30+90.53	15.50' Rt.	1408.25	1408.25
11	30+95.53	8.00' Rt.	1408.23	1408.90
12	30+95.53	15.50' Rt.	1408.38	1409.05
13	32+95.43	8.00' Rt.	1412.08	1412.75
14	32+95.43	15.50' Rt.	1412.20	1412.87
15	33+00.43	8.00' Rt.	1412.04	1412.04
16	33+00.43	15.50' Rt.	1412.18	1412.18

NOTE:
Top of Curb elevations shown are for Type 1 curb. Construct curb and gutter as noted.

LEGEND

- Pavement Removal
- Construct Wheelchair Ramp See Sh. No. 48
- Tree Removal

MKEC
Wichita, KS • 316-684-9600

STREET IMPROVEMENTS FOR
21ST & OLIVER INTERSECTION
WICHITA, KANSAS

©2016 MKEC Engineering All Rights Reserved www.mkec.com These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

PAVING PLAN - 21ST ST.

PROJECT NO.	472-85213
DATE	SEPT. 2016
SCALE	1"=20'

DESIGNED	DRAWN	CHECKED
JRA	DMU	JRA

NO.	REVISION	DATE

PLOTTED: Thursday, September 22, 2016 @ 03:37PM
J:\PROJECTS\2015\1501040178_COW_21ST & OLIVER_XXXXXX CAD\SHTS\05 CIVIL\PAV\15178EP04.DWG