1) Design Speed: Those items delegated to temporary traffic control should be designed and installed using the posted/legal speed of the roadway prior to work starting.

2) Minimum lane width: Lane widths shall be a minimum of 11' (measured between centerlines of pavement markings) or as shown on the plans, or as directed by the engineer. A lane width less than 11' may require restricted roadway width signing.

3) Consideration should be made to seperate pedestrian and, if needed, bicycle movements from both work site activity and vehicular traffic. Unless a reasonable safe route that does not involve crossing the roadway can be provided, pedestrians should be appropriately directed with advance signing that encourages them to cross to the opposite side of the roadway. In urban and suburban areas with high vehicular traffic volumes, these signs should be placed at intersections (rather than midblock locations) so that pedestrians are not confronted with midblock work sites that will induce them to attempt skirting the work site or making a midblock crossing.

4) When existing pedestrian facilities are disrupted, closed, or relocated, the temporary facilities shall be detectable and include accessiblity features consistent with the features present in the existing pedestrian facility.

5) When the driving surface open to traffic is milled, is a temporary surface made of loose material, or when directed by the engineer use the W8-15 (Grooved Pavement) or W8-7(Loose Gravel) a "C" distance after the W20-1 (Road Work Ahead) on mainline approaches. Signs may be used with the W8-15p motorcycle plaque as directed by the engineer. Display signs in advance of the condition as long as the condition is present.

6) Alternative temporary rumble strip options may be available. Please contact the Temporary Traffic Control Unit for more information at 785-296-0355 or 785-296-1183.

| STATE | PROJECT NO. | YEAR | SHEET NO. | TOTAL SHEETS |
|---|---|---|---|---|
| KANSAS | | | | |

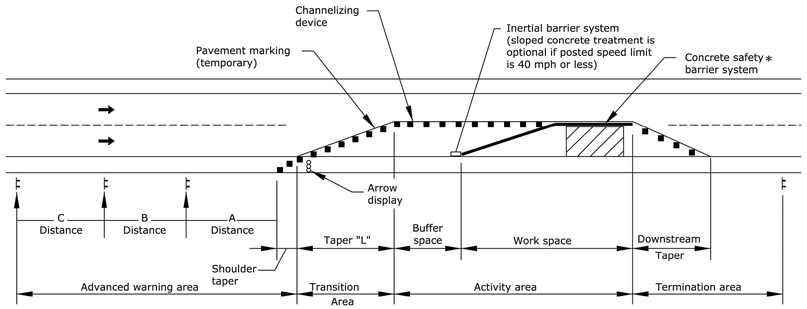


## TYPICAL WORK ZONE COMPONENTS

∗ When concrete barrier system is used, portable channelizing devices are not needed along the tangent barrier section.

*Minimum advance warning sign spacing (in feet):*

| *SPEED (MPH)* ✳ | *A* | *B* | *C* |
|---|---|---|---|
| *URBAN (40 MPH OR LOWER)* | *100* | *100* | *100* |
| *URBAN (45 MPH OR HIGHER)* | *350* | *350* | *350* |
| *RURAL (55 MPH OR LOWER)* | *500* | *500* | *500* |
| *RURAL (60 MPH OR HIGHER)* | *750* | *750* | *750* |
| *EXPRESSWAY/FREEWAY* | *1000* | *1500* | *2640* |

✳ Posted speed prior to work starting

The minimum spacing between signs shall be no less than 100', unless directed by the engineer.

The spacing between any signs may be increased beyond the minimum values in the table above as approved by the engineer in order to maximize visibility.

*Taper Formulas:*

*L = WS for speeds of 45 MPH or more*

*$L = WS^2/60$ for speeds of 40 MPH or less*

*Where: L =Minimum length of taper in feet*
*S =Numericial value of posted speed prior to work starting in MPH*
*W =Width in offset feet*

*Shifting taper=1/2 L*
*Shoulder taper=1/3 L*

Channelizer placement:

(1) The spacing between devices in transition area (taper) should not exceed a distance in feet equal to 1/2 the posted speed limit in mph prior to work starting.

(2) The spacing between devices in the advanced warning area and the activity area should not exceed a distance in feet equal to two times the posted speed limit in mph prior to work starting.

(3) Channelizing devices shall be placed for optimum visibility, normally at right angles to the traffic flow.

(4) Place directional indicator barricades in series to direct traffic onto the new path. The arrow sign should not be visible to opposing traffic.

(5) Alternating diagonal orange and white striping must slope downward in the direction traffic is expected to pass.

Buffer Space

| *SPEED (MPH)* ✳ | *20* | *25* | *30* | *35* | *40* | *45* | *50* | *55* | *60* | *65* | *70* | *75* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| *LENGTH (ft)* | *115* | *155* | *200* | *250* | *305* | *360* | *425* | *495* | *570* | *645* | *730* | *820* |

✳ Posted speed prior to work starting

Neither work activity nor storage of equipment, vehicles, or material should occur in the buffer space. When a protection vehicle is placed in advance of the work space, only the space upstream of the vehicle constitutes the buffer space.

If temporary concrete safety barrier system is used to seperate approaching traffic from the work space, the barrier system shall be considered part of the activity area. A full lane width should be available throughout the length of the buffer space. See typical work zone components above.

| NO. | DATE | REVISIONS | BY | APP'D |
|---|---|---|---|---|
| 3 | | | | |
| 2 | | | | |
| 1 | 08/18/15 | Channelizer spacing info | R.W.B. | K.E. |

KANSAS DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL
GENERAL NOTES

TE700

| FHWA APPROVAL | | 08/18/15 | APP'D | Kristina Ericksen |
|---|---|---|---|---|
| DESIGNED | B.A.K. | DETAILED | R.W.B. | QUANTITIES | TRACED |
| DESIGN CK. | | DETAIL CK. | | QUAN. CK. | TRACE CK. |

Drawn By : cp
Plotted : 02-AUG-2016 13:48
File : U:\Wichita-Civil\2016\160065\000\Muni-Trans\Drawings\KDOT STANDARDS\DGN'S\te700.dgn

PRINTS ISSUED

| DATE | PURPOSE | NO. |
|---|---|---|
| 12.02.16 | FOR BID | |

DOUGLAS AVE.
STREETSCAPE
IMPROVEMENTS
WICHITA, KS

LK Architecture
Architecture • Engineering • Planning • Interior Design • Landscape Architecture


LK Architecture Inc. ©
345 RIVERVIEW,WICHITA,KS 67203
Phone (316) 268-0230 Fax: (316) 268-0205

CONTACT: Jeffery A. Best, ASLA


PROJECT NUMBER:
15749.01

SHEET TITLE:
TE700 STANDARD

SHEET NUMBER:
C43


PEC PROFESSIONAL ENGINEERING CONSULTANTS, P.A.
303 SOUTH TOPEKA WICHITA, KS 67202
316-262-2691 www.pec1.com