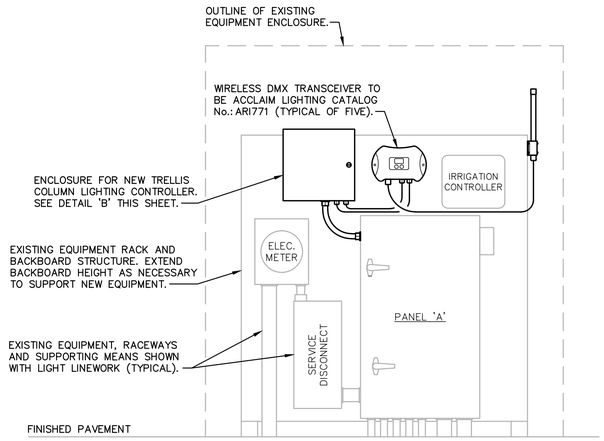

PANEL 'A' ENCLOSURE

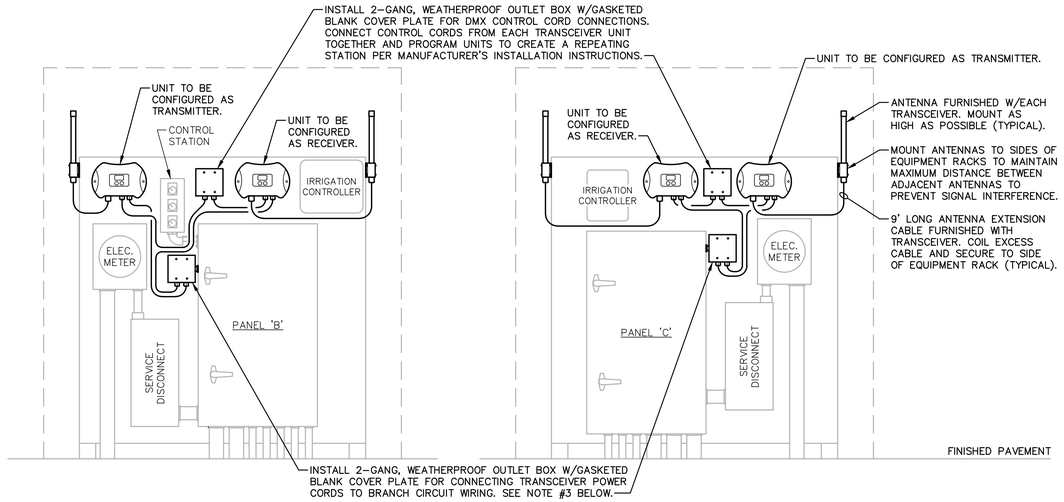

PANEL 'B' ENCLOSURE

PANEL 'C' ENCLOSURE

NOTES:

1. EXISTING PANELS ARE SQUARE D POWERLINK TYPE.
2. REPLACE EXISTING REMOTE CONTROLLED BREAKERS SERVING TRELLIS COLUMN LIGHTING FIXTURES WITH NEW 20AMP/1-POLE/120V, NON-CONTROLLED BREAKERS. ALL REMOTE CONTROLLED BREAKERS THAT ARE REPLACED SHALL BE RETURNED TO THE CITY.
3. INSTALL ONE, (1), NEW 20AMP/1-POLE/120V CIRCUIT BREAKER IN EACH PANEL AND FEED NEW DMX TRANSCEIVER UNIT(S) AND LIGHTING CONTROLLER (WHERE SHOWN) THAT ARE LOCATED IN SAME EQUIPMENT ENCLOSURE.
4. ALL NEW CIRCUIT BREAKERS TO BE NON-CONTROLLED, BOLTED TYPE WITH MINIMUM 22,000 A.I.C. RATING.
5. INSTALL NEW TYPEWRITTEN CIRCUIT DIRECTORY ON INSIDE DOOR OF EACH PANEL TO PROPERLY IDENTIFY ALL LOADS ADDED AND MODIFIED DURING PROJECT.
6. EACH DMX TRANSCEIVER FURNISHED WITH DMX CONTROL CORD AND POWER CORD. EXCESS CORD LENGTHS SHALL BE REMOVED AND ALL CORDS SHALL BE SUPPORTED FROM EQUIPMENT BACKBOARDS.

A PANEL EQUIPMENT ENCLOSURE ELEVATIONS

N.T.S.

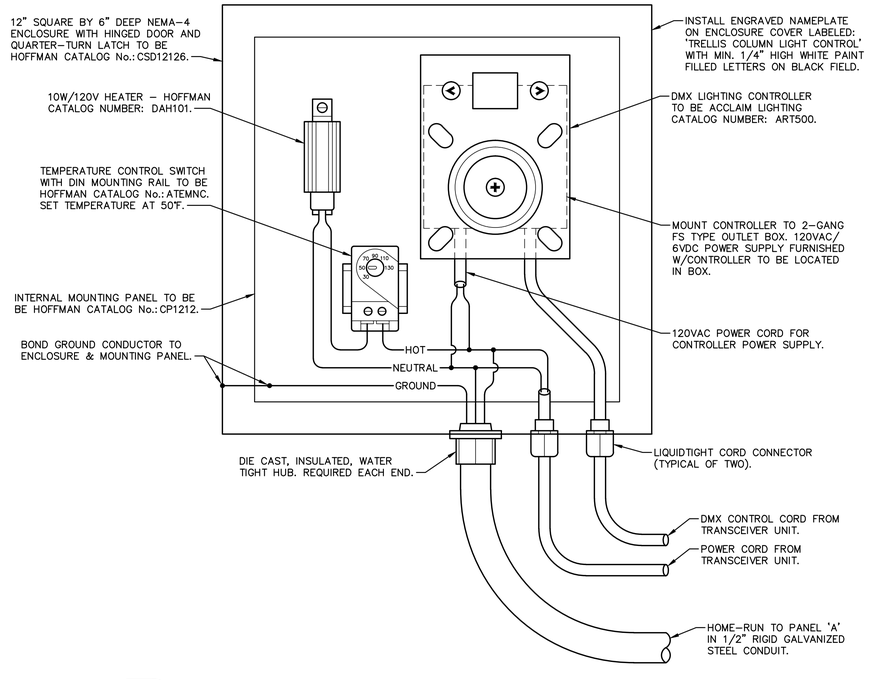

B LIGHTING CONTROL ENCLOSURE ELEVATION

HALF SCALE

PRINTS ISSUED

DATE	PURPOSE	NO.
12.02.16	FOR BID	

DOUGLAS AVE.
STREETSCAPE
IMPROVEMENTS
WICHITA, KS

LK Architecture

Architecture • Engineering • Planning • Interior Design • Landscape Architecture

LK Architecture Inc. ©
345 RIVERVIEW, WICHITA, KS 67203
Phone (316) 268-0230 Fax: (316) 268-0205
CONTACT: Jeffery A. Best, ASLA

PROJECT NUMBER:
15749.01

SHEET TITLE:
SITE ELECTRICAL DETAILS

SHEET NUMBER:
SE-2 OF: SE-4