
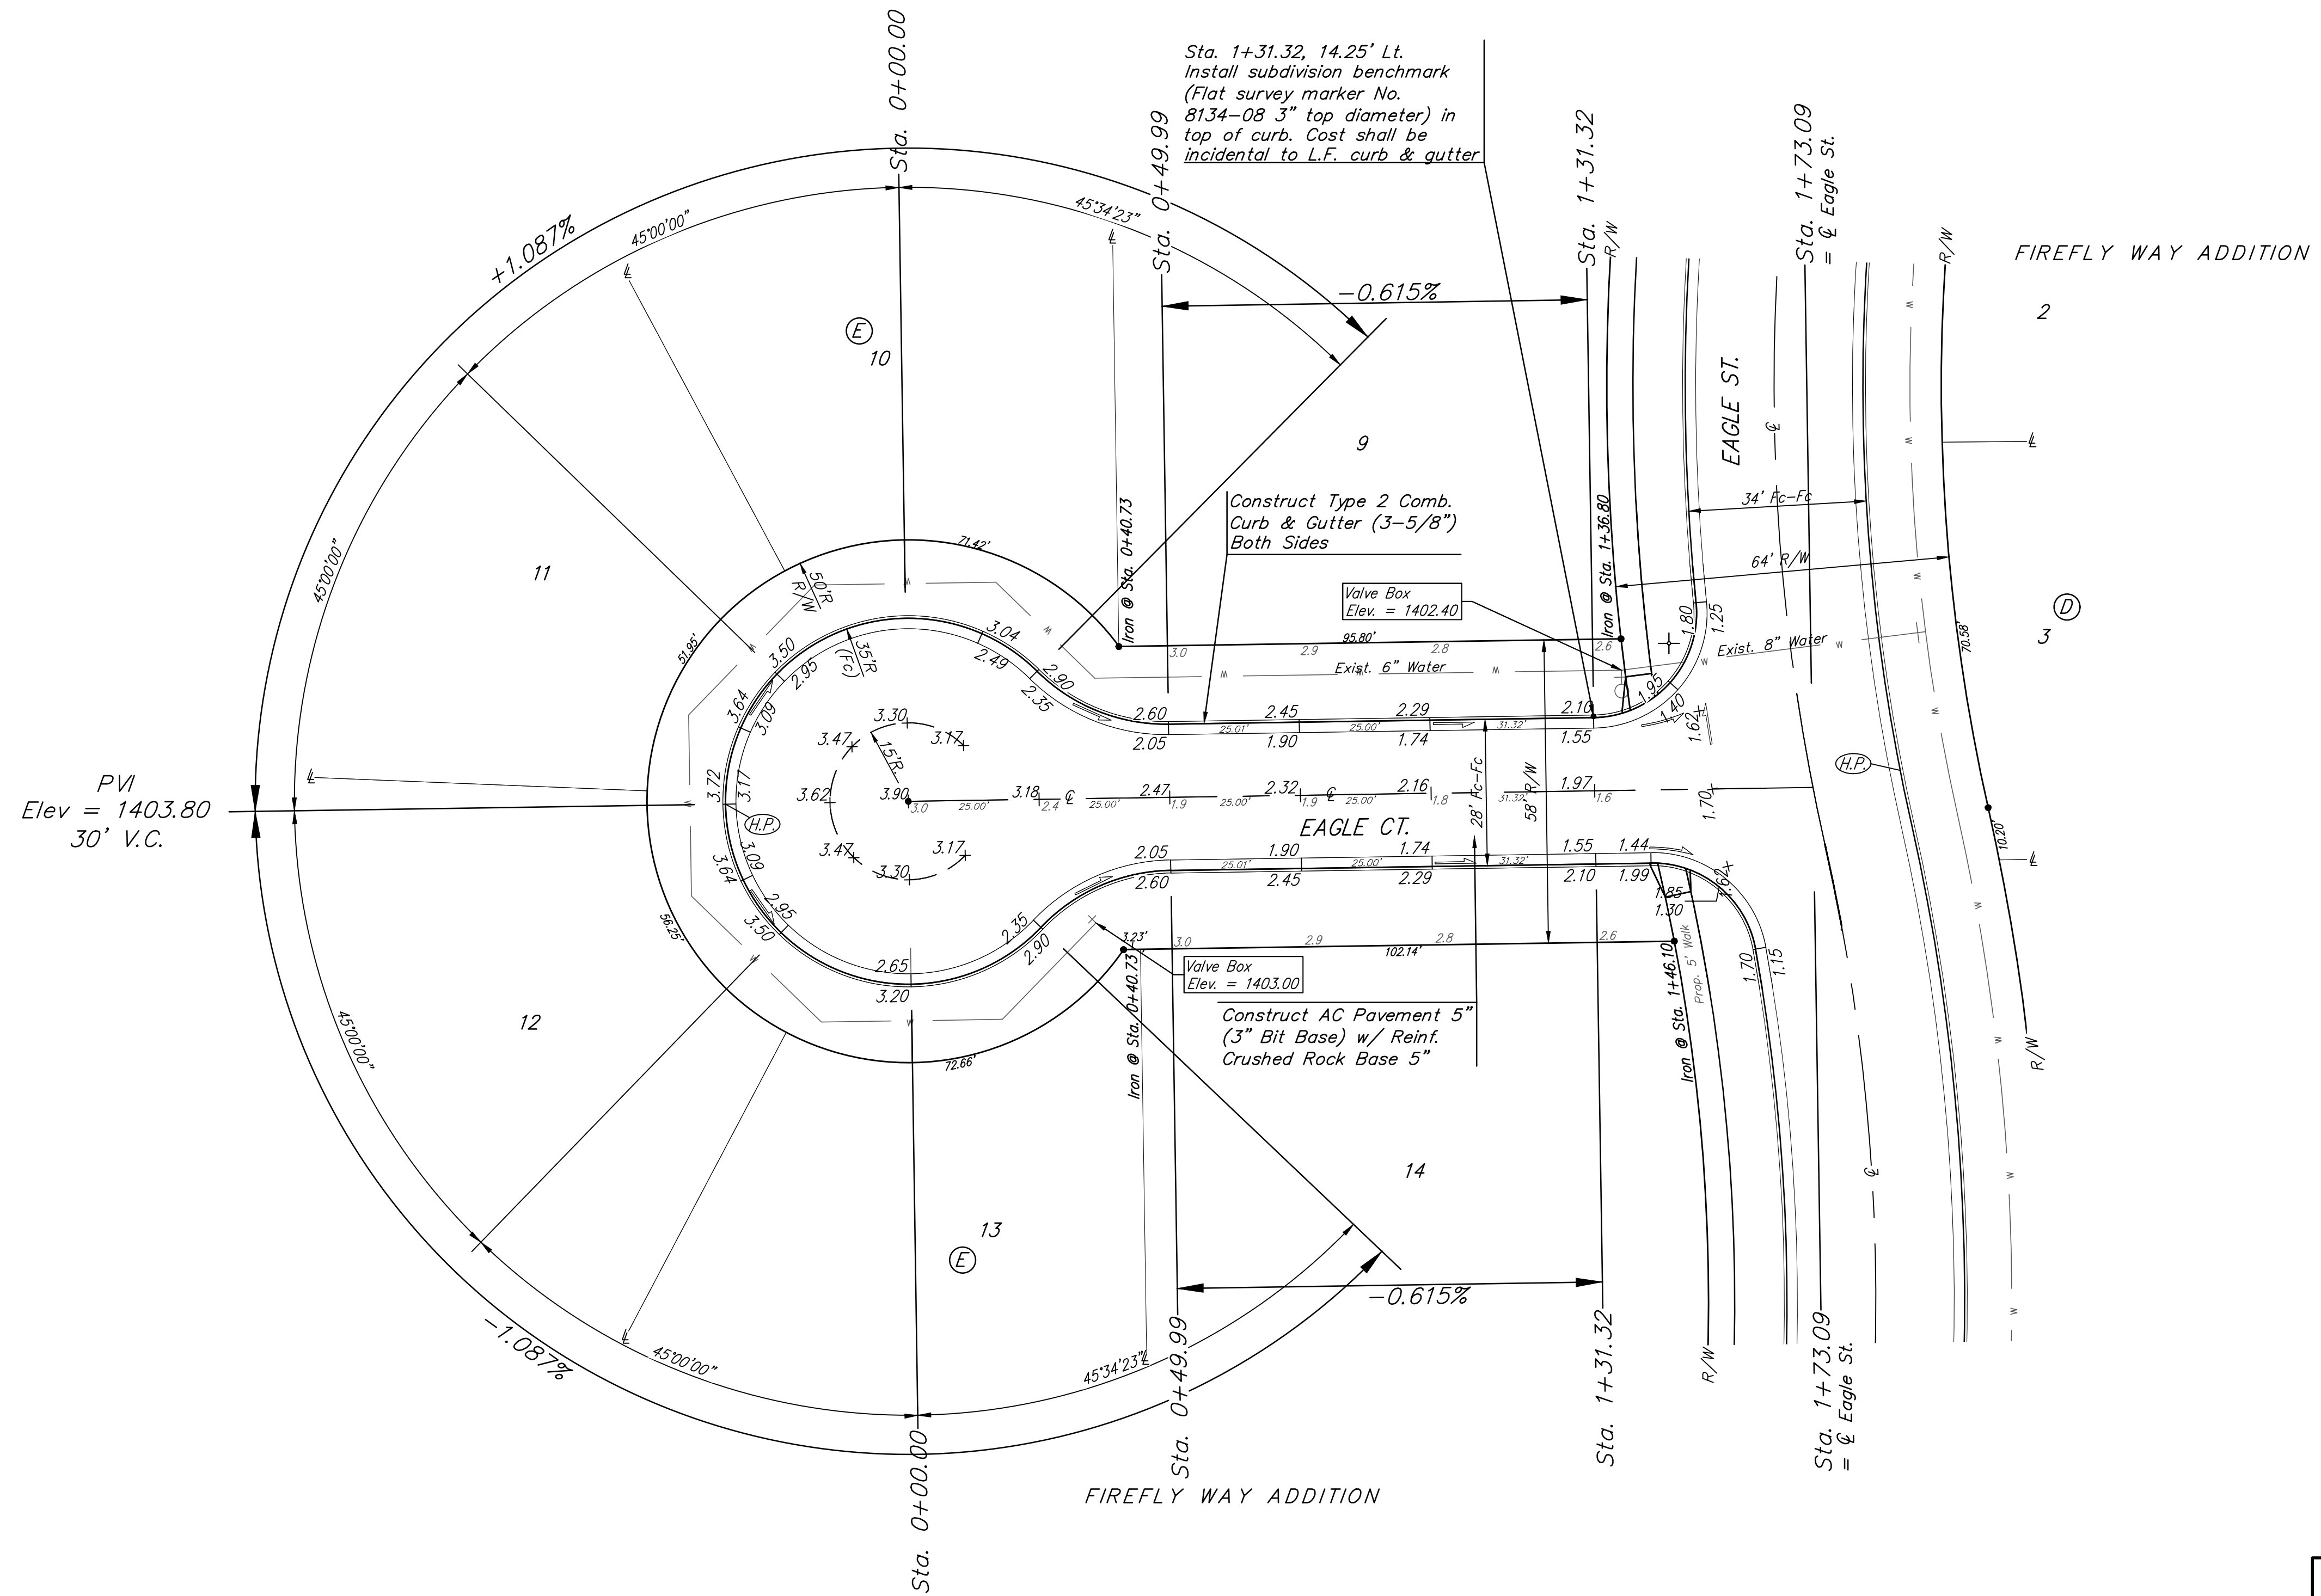


BENCHMARKS:
 BM #1: Disc on Top of Curb
 South Side of 27th St. N. and
 West of 27th Ct. N.
 Woods North 3rd Addition
 Elev. = 1397.69 NAVD88

BM #2: Northwest 1/4 Corner
 Government Lot 2, Sec. 3, TWP.
 27-S, R-2-E
 Elev. = 1405.78 NAVD88

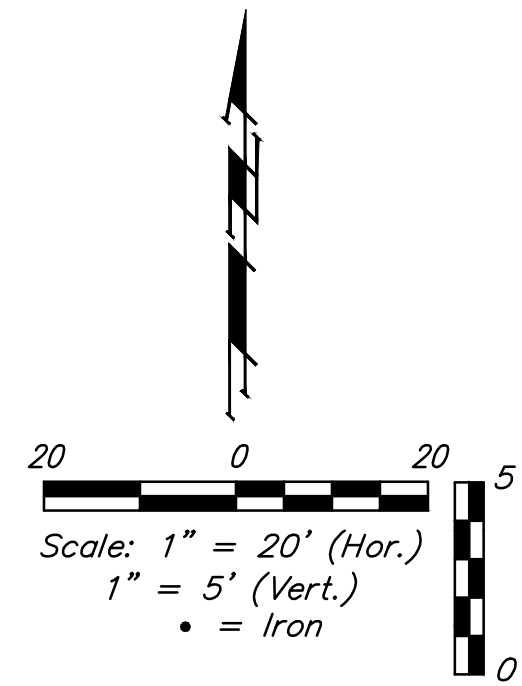

PVI
 Elev = 1403.80
 30' V.C.

Sta. 1+31.32, 14.25' Lt.
 Install subdivision benchmark
 (Flat survey marker No.
 8134-08 3" top diameter) in
 top of curb. Cost shall be
 incidental to L.F. curb & gutter


Construct Type 2 Comb.
 Curb & Gutter (3-5/8")
 Both Sides

Valve Box
 Elev. = 1402.40

Valve Box
 Elev. = 1403.00

Construct AC Pavement 5"
 (3" Bit Base) w/ Reinf.
 Crushed Rock Base 5"

Roll type curb & gutter to
 be constructed on the pavement
 on this sheet.
 Top of curb elevation are given
 for full height curb.

		Firefly Way Addition Phase I	
		EAGLE CT.	
Sta. 0+00.00 to Sta. 1+73.09		<small>Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>	
PROJECT NUMBER 472-85350	DESIGN AEG	DRAWN DJL	
REVISIONS:	APPROVED	DATE 2/17	
	SCALE Noted	SHEET	
			12 OF 38