


BROOKVIEW CIR CY Excavation (unadjusted)				BROOKVIEW CIR CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
0+30.25	23.04	0.00	0.00	0+30.25	14.40	0.00	0.00
0+37	19.21	5.28	5.28	0+37	19.36	4.22	4.22
0+67	19.21	21.35	26.63	0+67	19.36	21.51	25.73
0+72.50	22.28	4.23	30.85	0+72.50	10.84	3.08	28.80
1+00	21.38	22.23	53.08	1+00	10.75	11.00	39.80
1+50	15.73	34.35	87.43	1+50	10.74	19.91	59.71
2+00	12.96	26.56	113.99	2+00	10.85	19.99	79.71
2+50	12.96	24.01	137.99	2+50	10.85	20.09	99.80
3+00	12.96	24.01	162.00	3+00	10.85	20.09	119.90
3+50	12.96	24.01	186.00	3+50	10.85	20.09	139.99
4+00	12.96	24.01	210.01	4+00	10.85	20.09	160.08
4+50	12.96	24.01	234.01	4+50	10.85	20.09	180.18
4+67.97	12.96	8.63	242.64	4+67.97	10.85	7.22	187.40

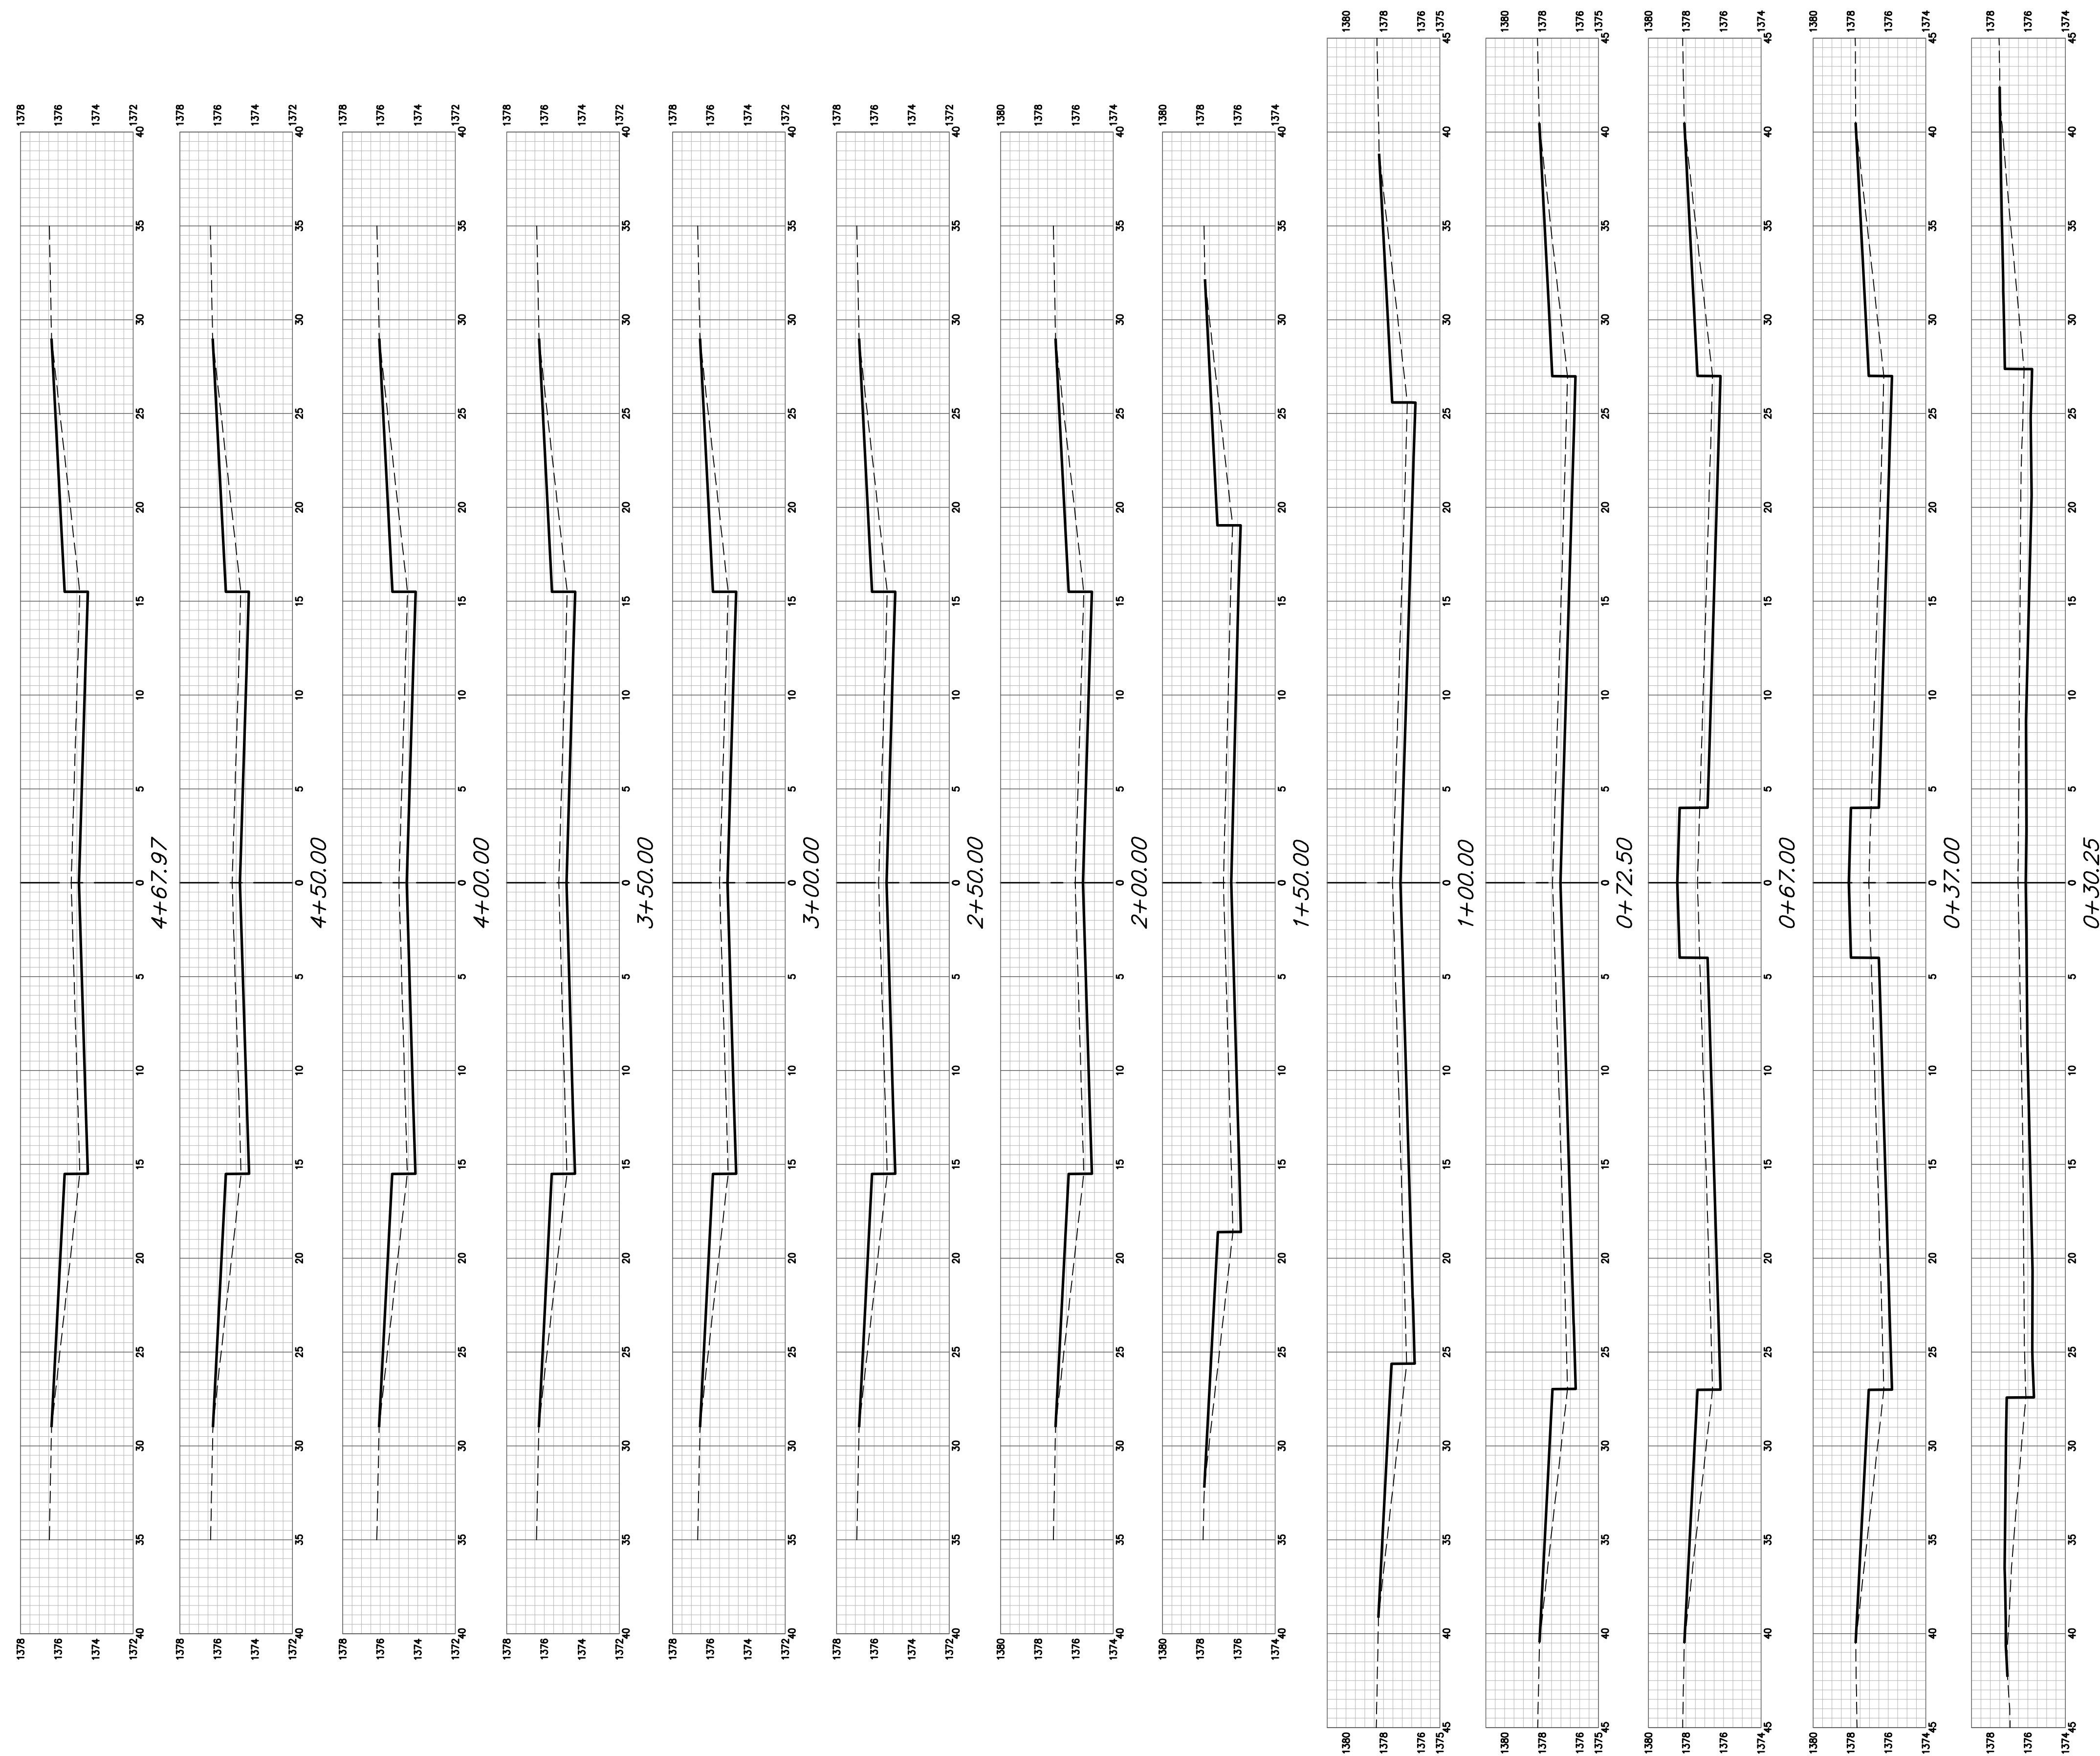

BROOKVIEW CIR