


WINSTON CY Excavation (unadjusted)				WINSTON CY Compacted Fill (unadjusted)				WINSTON CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
1+46.71	12.96	0.00	0.00	1+46.71	1.26	0.00	0.00	1+46.71	10.73	0.00	0.00
2+00	12.96	25.58	25.58	2+00	1.26	2.33	2.33	2+00	10.73	21.22	21.22
2+50	12.96	24.01	49.59	2+50	1.26	2.18	4.51	2+50	10.73	19.91	41.12
3+00	12.96	24.01	73.59	3+00	1.26	2.26	6.77	3+00	10.73	19.89	61.01
3+50	12.96	24.01	97.60	3+50	1.26	2.45	9.22	3+50	10.73	19.85	80.87
4+00	12.96	24.01	121.60	4+00	1.26	2.45	11.67	4+00	10.73	19.85	100.72
4+50	12.96	24.01	145.61	4+50	1.26	2.45	14.12	4+50	10.73	19.85	120.57
5+00	12.96	24.01	169.62	5+00	1.26	2.45	16.57	5+00	10.73	19.85	140.43
5+50	12.96	24.01	193.62	5+50	1.26	2.40	18.97	5+50	10.73	19.86	160.29
5+72.45	12.96	10.78	204.40	5+72.45	1.26	1.00	19.97	5+72.45	10.73	8.93	169.22

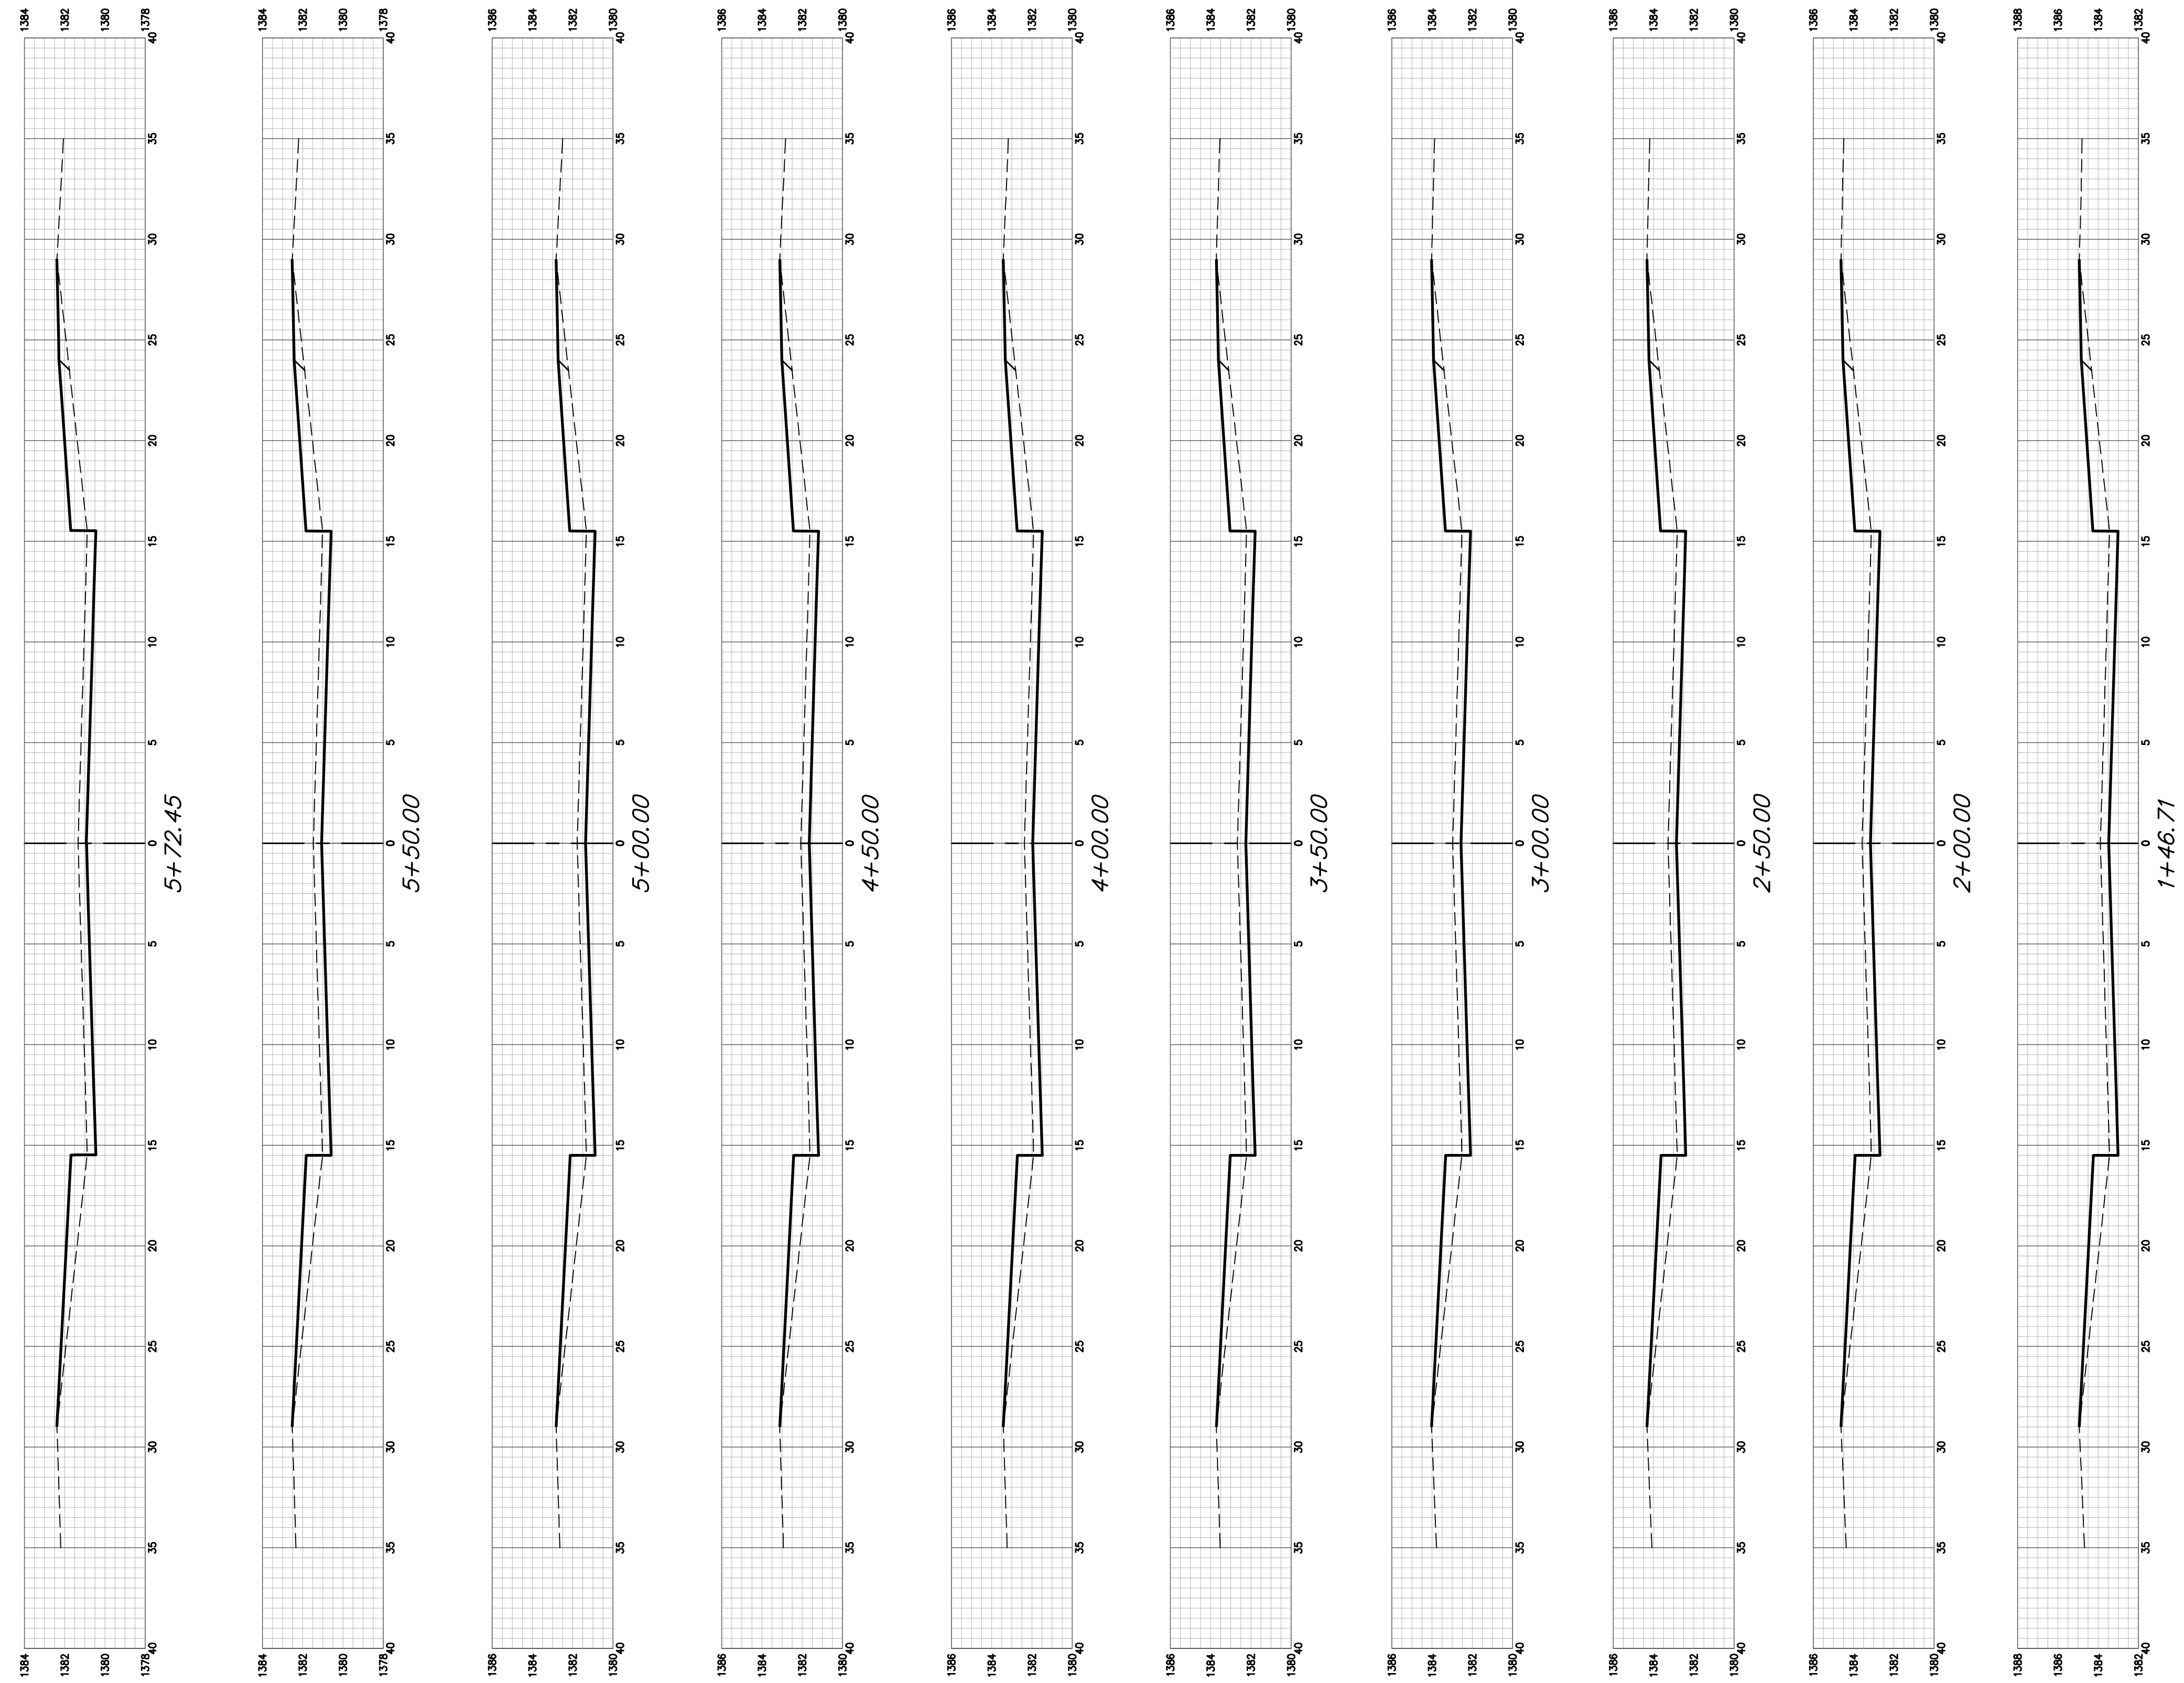

WINSTON