


PROJECT NO.	SHEET NO.	TOTAL SHEETS
471-83256	31	54

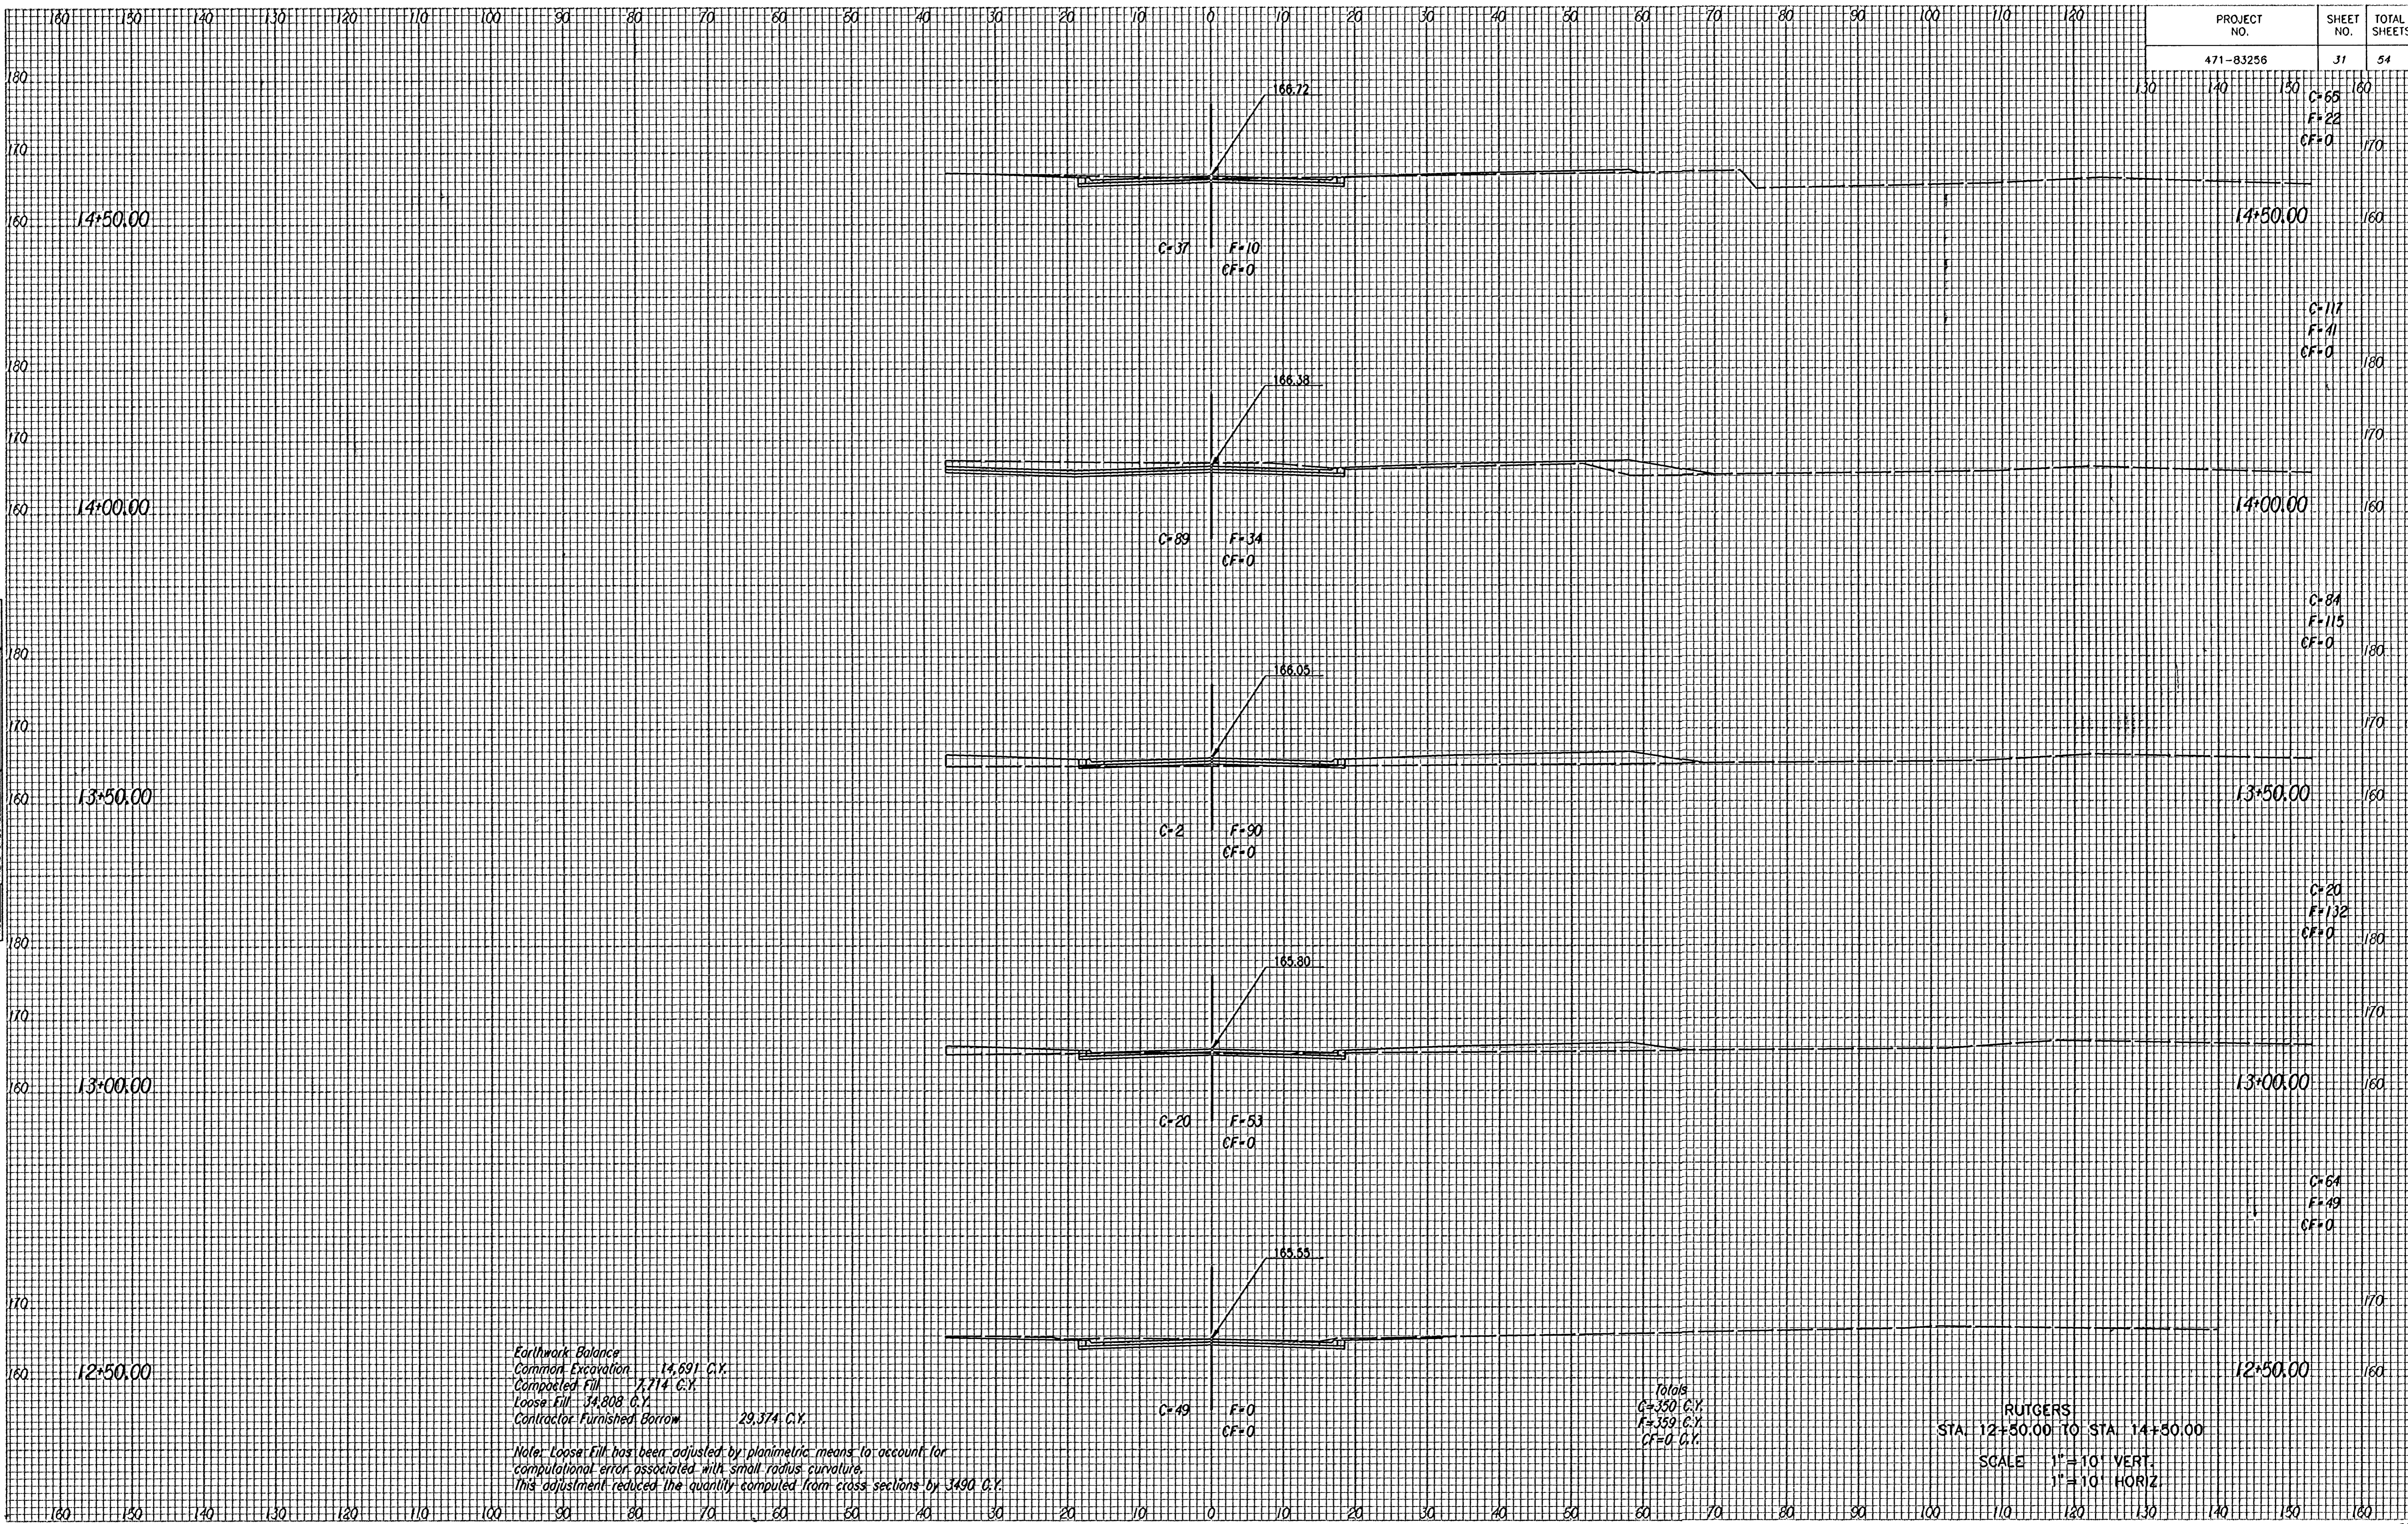

NOTE BOOK TEMPLATE AREAS CHECKED NO.

Earthwork Balance  
 Common Excavation 14,691 C.Y.  
 Compacted Fill 7,714 C.Y.  
 Loose Fill 34,808 C.Y.  
 Contractor Furnished Borrow 29,374 C.Y.

Note: Loose Fill has been adjusted by planimetric means to account for computational error associated with small radius curvature. This adjustment reduced the quantity computed from cross sections by 3490 C.Y.

Totals  
 C=350 C.Y.  
 F=359 C.Y.  
 CF=0 C.Y.

RUTGERS  
 STA. 12+50.00 TO STA. 14+50.00  
 SCALE 1" = 10' VERT.  
 1" = 10' HORIZ