
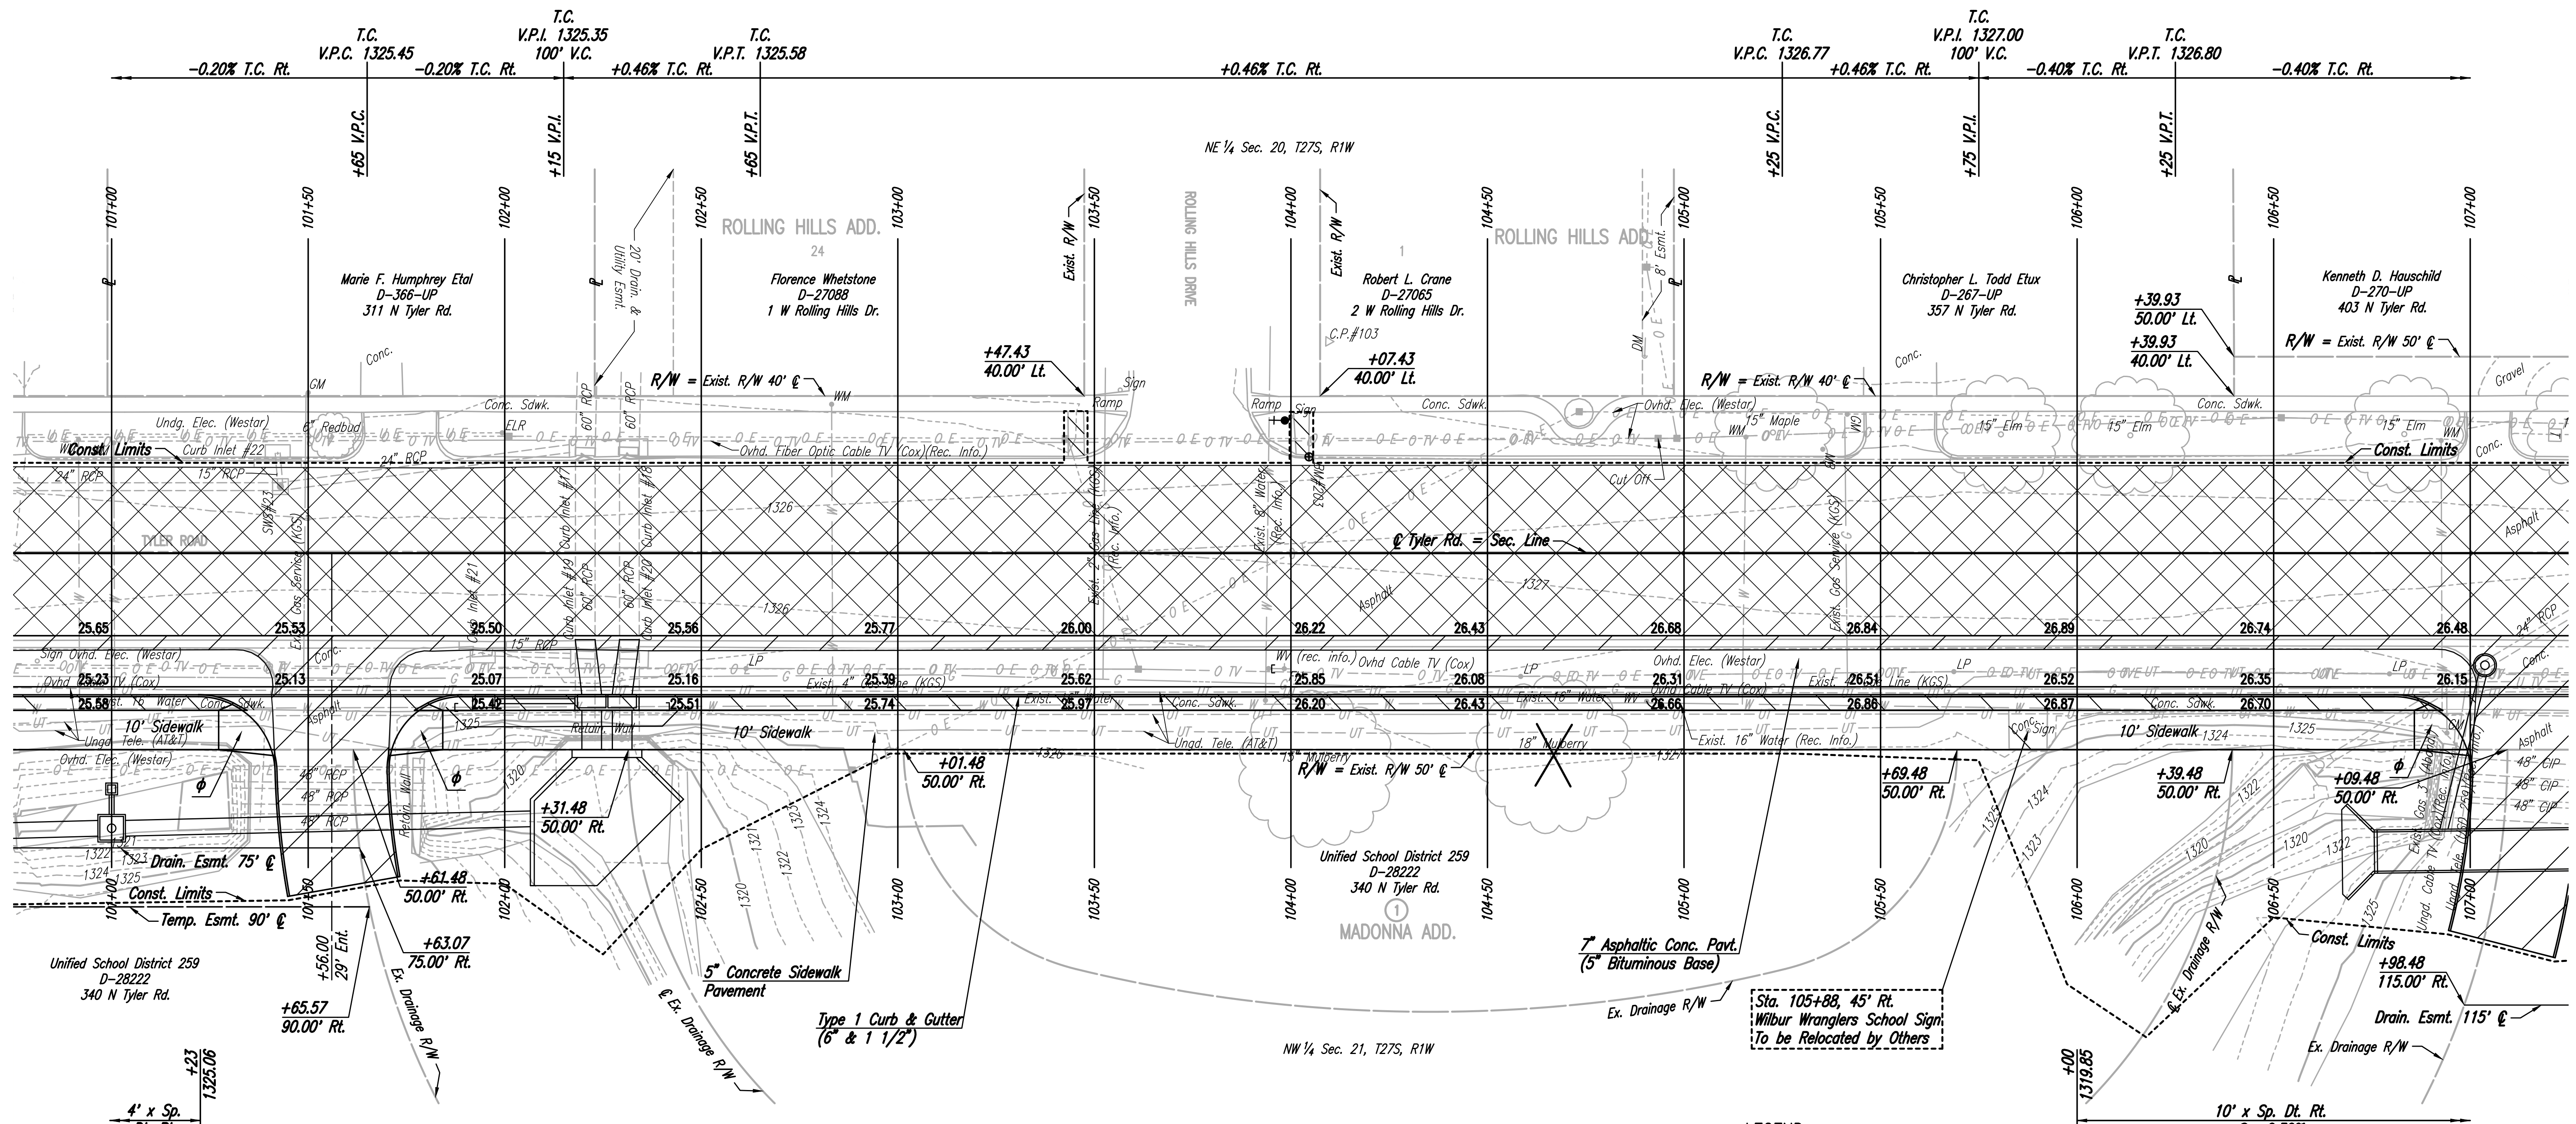


CP #103 53.89' Lt. @ Sta. 104+09.57
 1/2" rebar
 N 1,685,939.043 E 1,617,742.199
 1. 13.80' E to west edge sidewalk, west side Tyler Road
 2. 66.00' NE to west bolt westar pole base
 3. 20.00' S to back north curb rolling hills

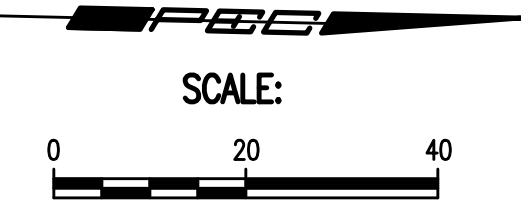

REMOVAL OF EXISTING STRUCTURES *

| STATION | SIDE | ITEM |
|---------|------|---------------------------------|
| 101+32 | Rt. | Headwall |
| 101+55 | Rt. | 3-48" x 49" RCP |
| 101+78 | Rt. | Headwall |
| 101+85 | Rt. | Sign |
| 101+94 | Rt. | Curb Inlet, 22.2 L.F. 15" RCP |
| 102+21 | Rt. | Curb Inlet, 25.8 L.F. 60" RCP |
| 102+26 | Rt. | Headwall |
| 102+32 | Rt. | Curb Inlet, 25.8 L.F. 60" RCP |
| 105+88 | Rt. | Post w/concrete pad |
| 106+83 | Rt. | 48.0 L.F. 24" RCP w/End Section |
| 106+93 | Rt. | Ret. Wall |

Note: Elevations shown along Curb and Gutter are to High Edge and Top of Curb.

BM #203-Chiseled square on west top of curb Tyler Road at north end of return rolling hills street.
 24.52' Lt. @ Sta. 104+04.60 Elev.=1325.32 (NAVD88)

LEGEND

- Mill/Overlay
- Pavement Removal
- Sidewalk Removal
- Wheelchair Ramp without Detectable Warning
- Denotes trees to be removed

UTILITIES

- Cable TV
- Communications
- Gas
- Power
- Storm Water
- Telephone
- Water
- Cox Communications
- Wichita Public Schools
- Kansas Gas Service
- Westar Energy
- City of Wichita
- AT&T
- City of Wichita

| | | | |
|---|----------|---------|---------------|
| No. | Revision | By | Date |
| TYLER ROAD BETWEEN MAPLE AND CENTRAL PAVING AND INCIDENTAL DRAINAGE IMPROVEMENTS PLAN STA. 101+00 TO STA. 107+00 GARY JANZEN, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-85282 | | | |
| | | | |
| Designed by | CKC | Job No. | 31-15956-000 |
| Drawn by | CP | Date | JULY 2017 |
| | | | Sht. 05 of 96 |

Sowed 07-27-2017 8:57:27 AM by CP
 Plot Scale 1:1 07-27-2017 8:12:27 AM by CP
 U:\Wichita-Civil\2015\15956\Drawings\15956-000-05C-Plan-101

* For Information Only