B.L. STA. 10+05.26 18.47' RT.
STA. 0+14.41 CONSTRUCT REINFORCED CONCRETE MANHOLE (7.0' X 9.0').
TOP 1287.96

SWS MH
Top 1287.79
FL 1283.95 (N)
FL 1284.99 (E)
FL 1284.13 (S)

SWS INLET
Top 1287.32
FL 1284.33 (N)

SWS MH
Top 1287.74
FL 1282.95 (E)
FL 1281.95 (S)
FL 1284.60 (W)

SWSMH
Top 1288.08
FL 1281.72 (N)
FL 1281.59 (E)
FL 1282.69 (S)
FL 1281.23 (W)

SWS INLET
Top 1288.10
FL 1284.95 (E)

CAUTION!! UNDERGROUND SBC

B.L. STA. 10+05.26 30.07' LT.
STA. 0+62.95 CONSTRUCT REINFORCED CONCRETE MANHOLE (7.0' X 9.0').
TOP 1287.65

1/4 SECTION LINE

CAUTION!! UNDERGROUND SBC

10' SAN. SEWER ESMT.

Thimble
Sta. 10+00

PROPOSED INLET

SWS INLET
Top 1288.27
FL 1285.24 (W)

EXISTING 42" V.C.P. SANITARY SEWER

GROVE

42" San. Sewer

SSMH
Top 1288.09
FL 1278.12

EXISTING
34"x53" RCP HE

42" San. Sewer

10' U/E

EXISTING MH

SSMH
Top 1287.88
FL 1278.19

B.L. STA. 10+15.23 40.03' LT.
STA. 0+77.05 CONSTRUCT REINFORCED CONCRETE MANHOLE (7.0' X 9.0') OVER EXISTING 42" PIPE TOP 1287.74

B.L. STA. 10+15.23 28.86' RT.
STA. 0+00.0 CONSTRUCT REINFORCED CONCRETE MANHOLE (7.0' X 9.0') OVER EXISTING 42" PIPE. TOP 1287.57. PLUG AND ABANDON PIPE NORTH.

ABANDON MANHOLES

NEW 8" WATER MAIN
(PROJECT NO. 448-89553)

CENTERLINE NEW PAVEMENT
(PROJECT. NO. 472-83686)

HARRY


SECTION LINE = BASELINE

SWS INLET
Top 1288.14
FL 1283.59

SWS MH
Top 1287.56
FL 1282.97 (E)
FL 1282.90 (W)
FL 1283.37 (N)

SCALE: 1"=20' HORIZ. (PLAN)
1"=5' VERT. (PROFILE)

SCALE
1" = 20' Horiz. (Plan)
1" = 5' Vert. (Profile)

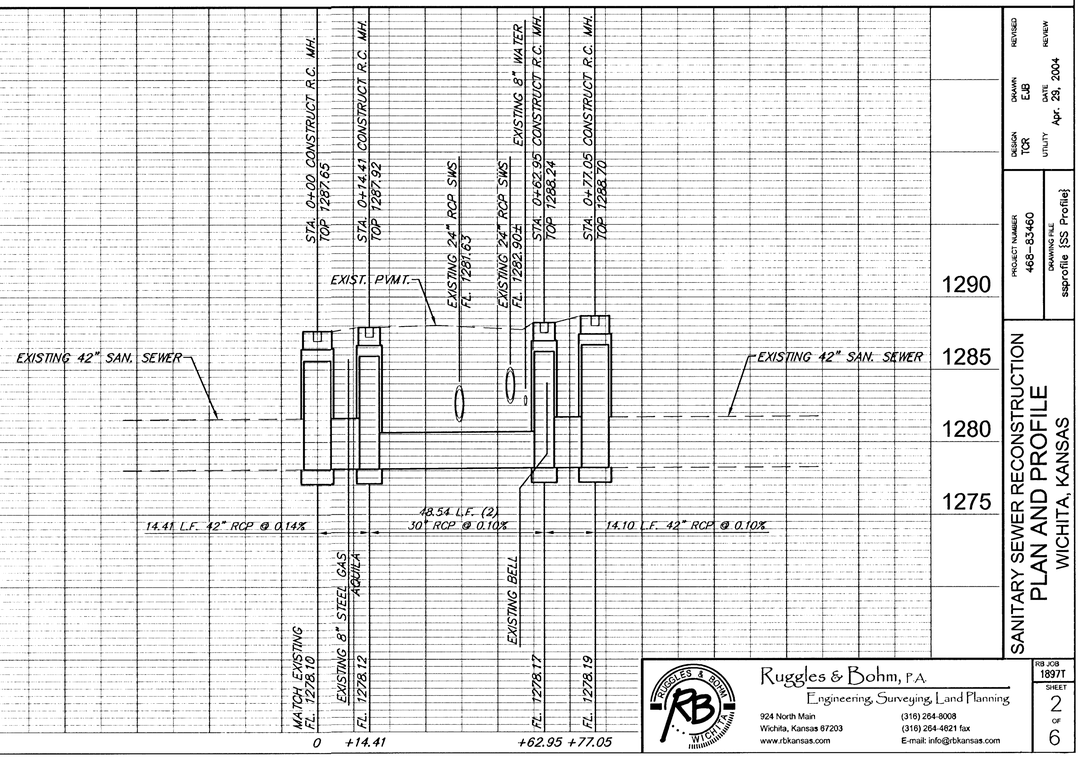

SANITARY SEWER RECONSTRUCTION
PLAN AND PROFILE
WICHITA, KANSAS

REVISED
REVIEW
DESIGN TCR
DRAWN EJB
UTILITY
DATE Apr. 29, 2004
PROJECT NUMBER 468-83460
DRAWING FILE ssprofile {SS Profile}

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning
924 North Main
Wichita, Kansas 67203
www.rbkansas.com
(316) 264-8008
(316) 264-4621 fax
E-mail: info@rbkansas.com

RB JOB 18977
SHEET 2 OF 6