
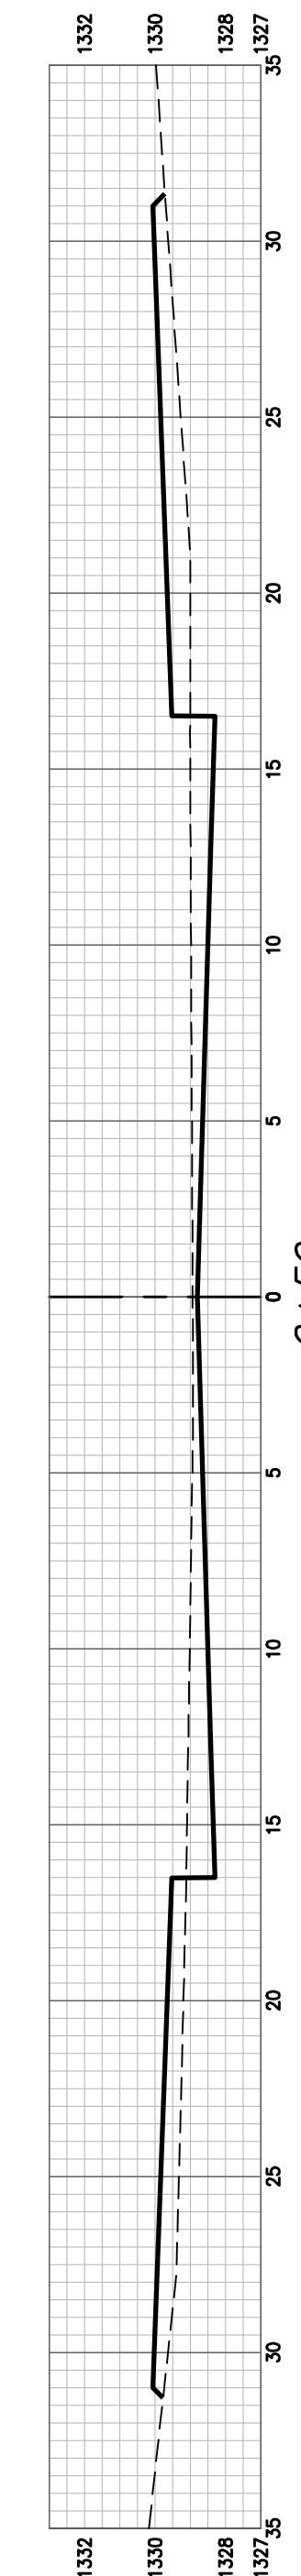
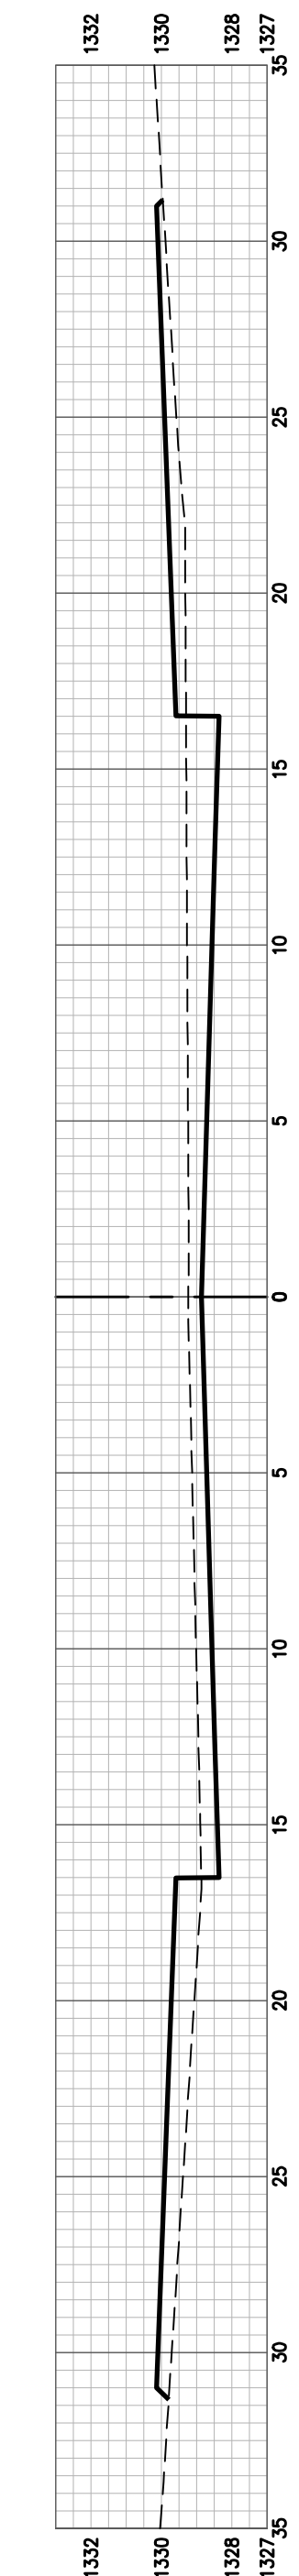
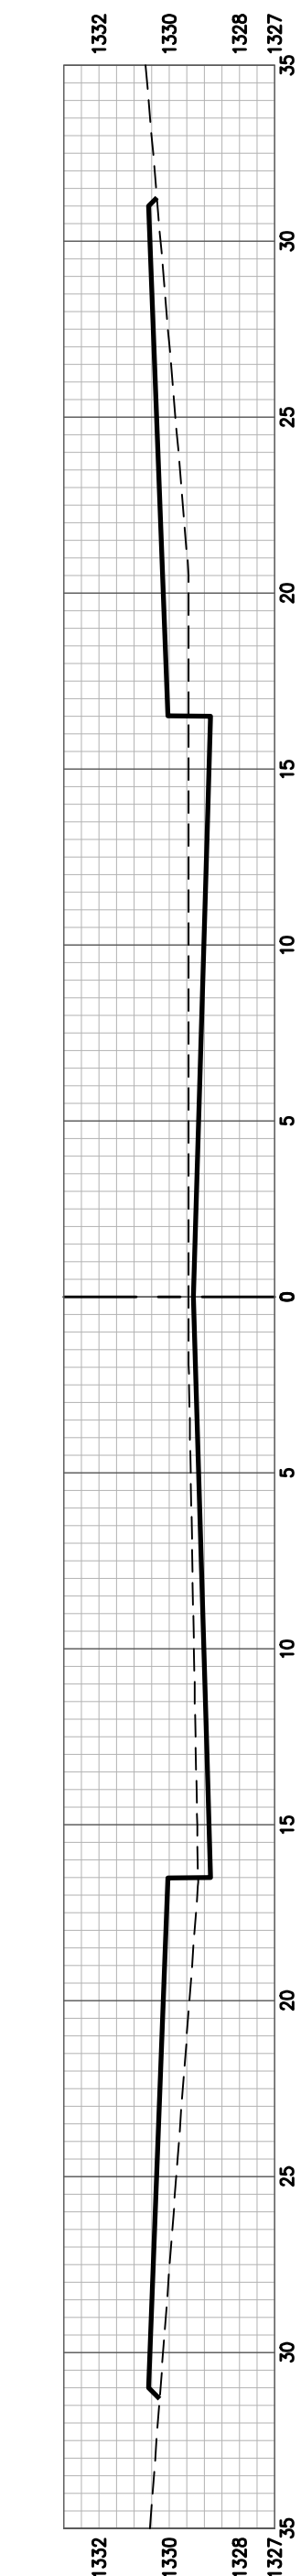
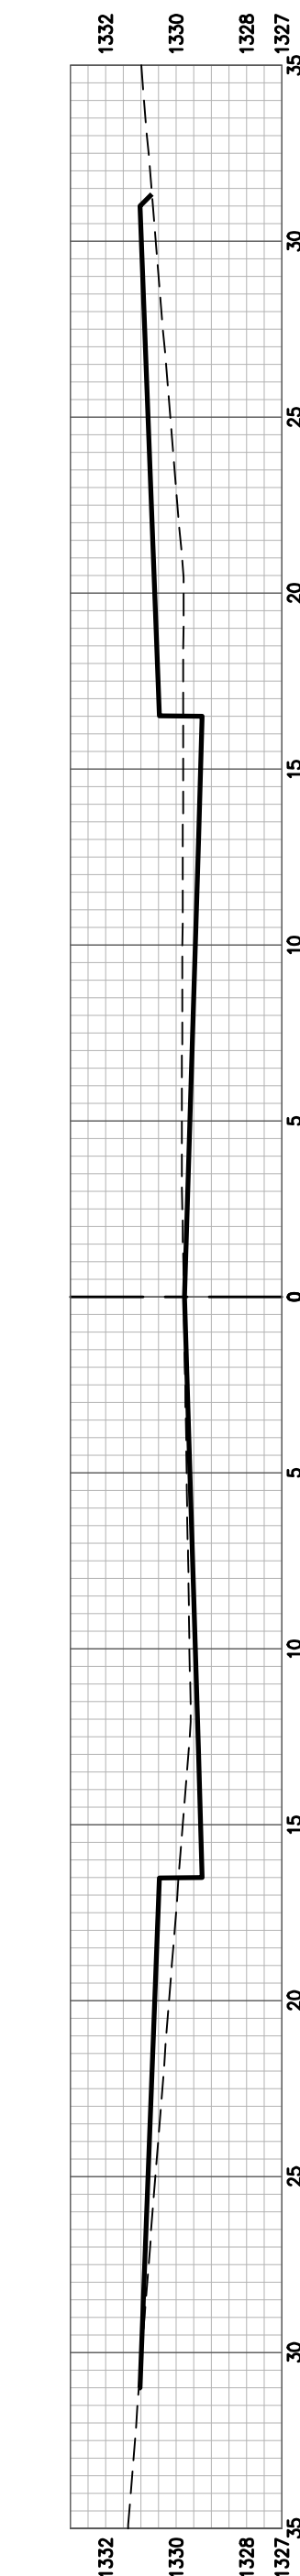
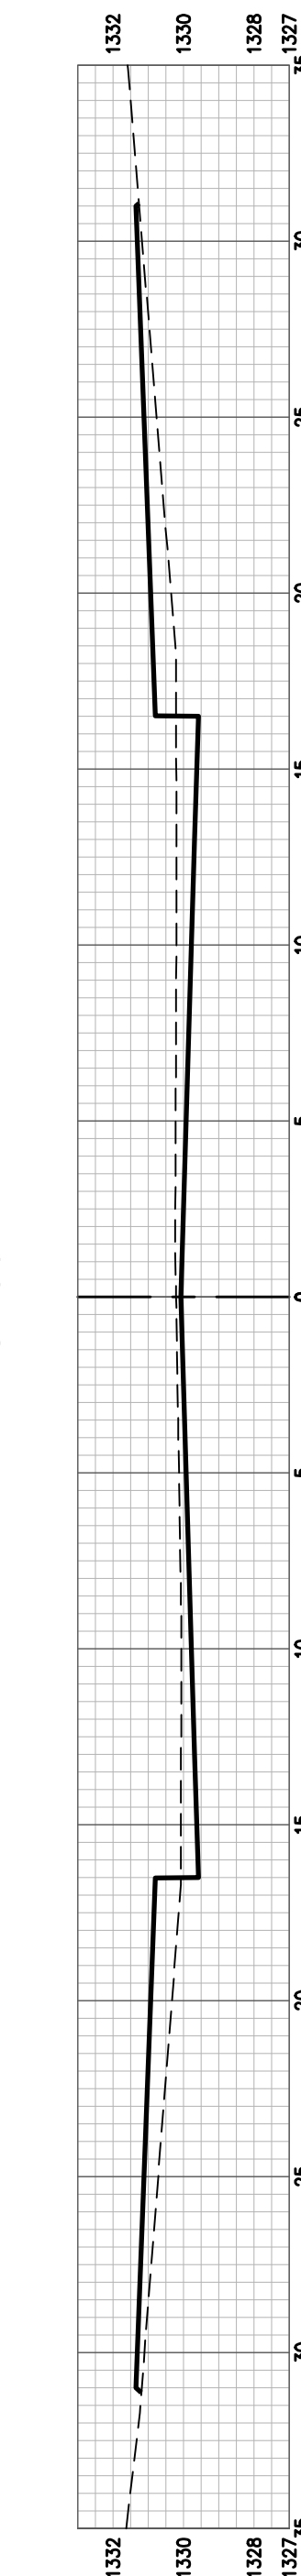
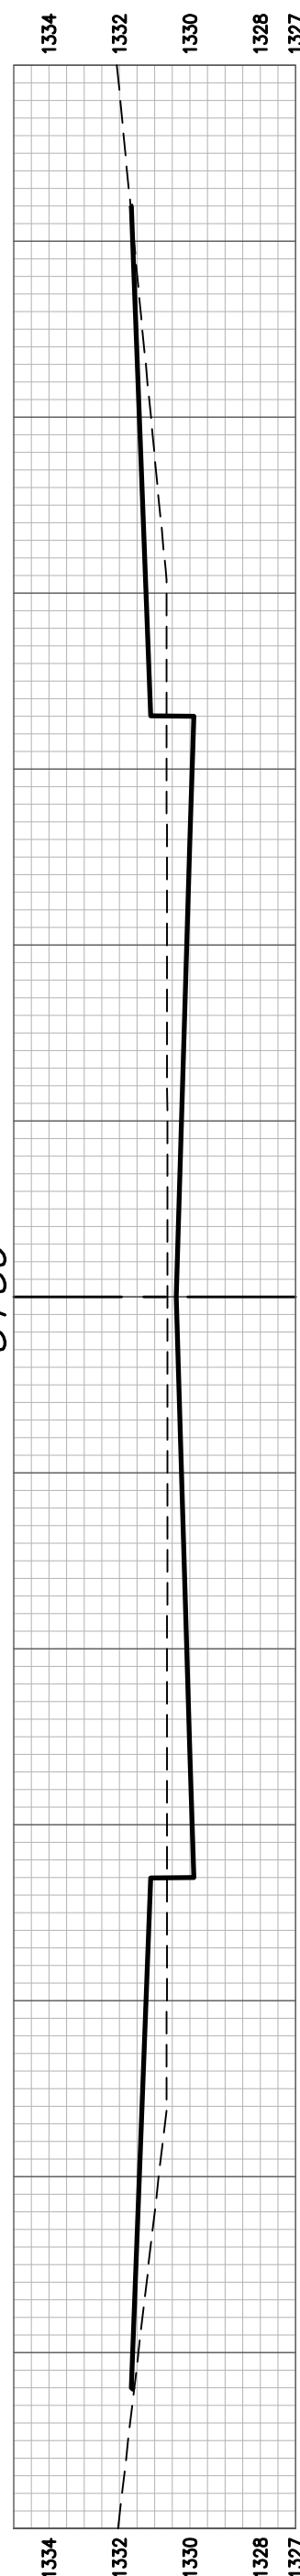
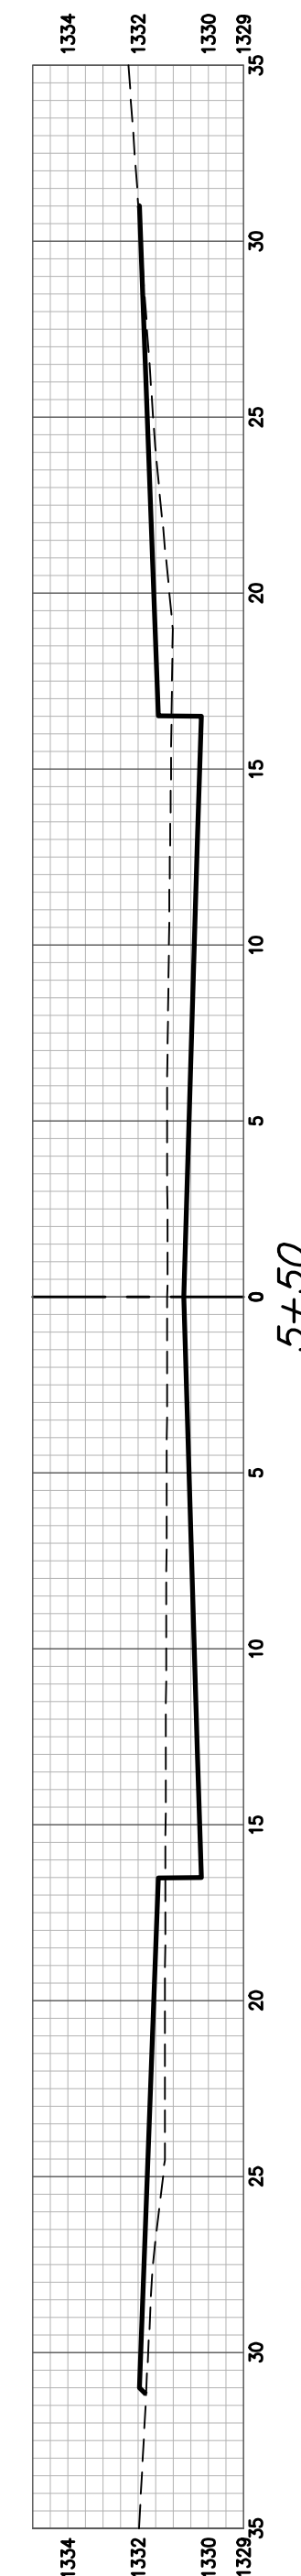


VENICE CT CY Excavation (unadjusted)				VENICE CT CY Compacted Fill (unadjusted)				VENICE CT CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
-0+50	0.00	0.00	0.00	-0+50	0.00	0.00	0.00	-0+50	0.00	0.00	0.00
-0+38	13.66	3.04	3.04	-0+38	0.00	0.00	0.00	-0+38	15.87	3.53	3.53
-0+15	9.61	9.91	12.95	-0+15	7.24	3.08	3.08	-0+15	24.97	17.39	20.92
0+00	9.11	5.20	18.15	0+00	28.62	9.96	13.04	0+00	15.34	11.20	32.12
0+37.18	15.48	16.93	35.07	0+37.18	0.00	19.70	32.75	0+37.18	26.00	28.46	60.57
0+56.75	9.93	9.21	44.28	0+56.75	0.00	0.00	32.75	0+56.75	19.84	16.61	77.18
1+00	11.14	16.94	61.22	1+00	0.00	0.00	32.75	1+00	18.86	30.92	108.10
1+50	10.21	19.74	80.97	1+50	0.00	0.00	32.75	1+50	18.76	34.64	142.74
2+00	10.96	19.60	100.56	2+00	0.00	0.00	32.75	2+00	16.79	32.92	175.65
2+50	14.35	23.44	124.00	2+50	0.00	0.00	32.75	2+50	15.01	29.44	205.09
3+00	17.76	29.77	153.77	3+00	0.00	0.00	32.75	3+00	12.96	25.85	230.94
3+50	10.53	26.43	180.20	3+50	0.00	0.00	32.75	3+50	16.84	27.23	258.17
4+00	8.29	17.25	197.45	4+00	0.00	0.00	32.75	4+00	13.23	27.30	285.47
4+50	11.00	17.86	215.30	4+50	0.00	0.00	32.75	4+50	12.32	23.66	309.13
5+00	16.75	25.69	240.99	5+00	0.00	0.00	32.75	5+00	11.86	22.40	331.53
5+50	23.60	37.36	278.35	5+50	0.00	0.00	32.75	5+50	8.07	18.46	349.98
5+78.81	22.55	24.62	302.97	5+78.81	0.00	0.00	32.75	5+78.81	8.71	8.95	358.93

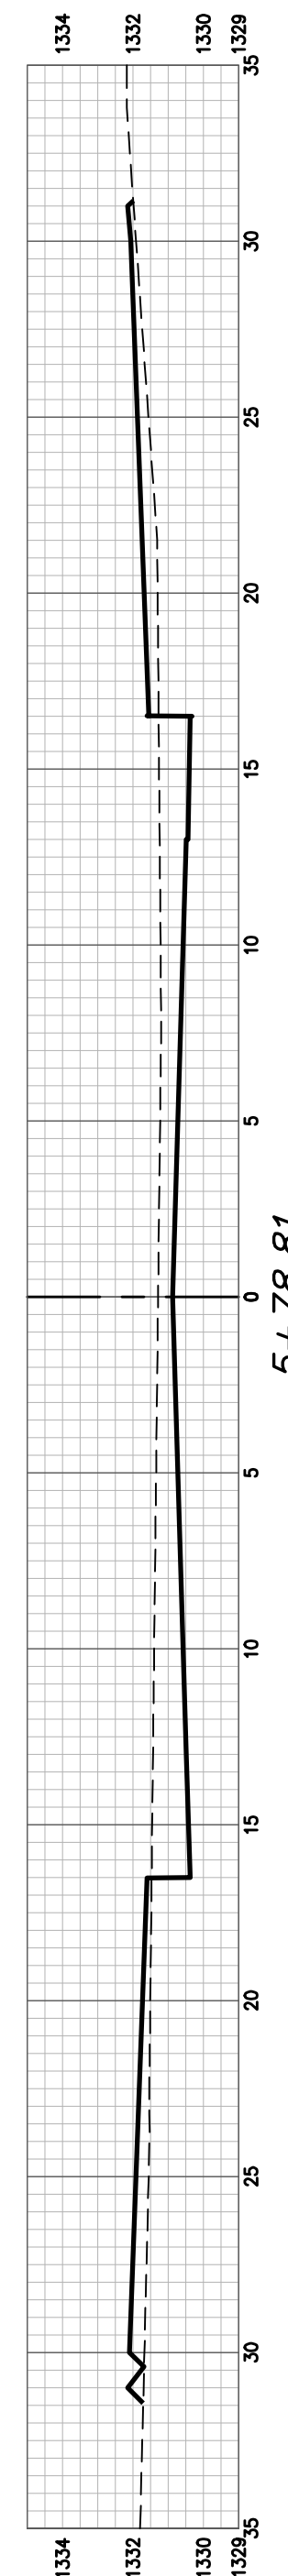

VENICE CT