


26TH CT N CY Excavation (unadjusted)				26TH CT N CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
-0+50	0.00	0.00	0.00	-0+50	0.00	0.00	0.00
-0+35	8.77	2.44	2.44	-0+35	22.56	6.27	6.27
-0+15	27.76	13.53	15.97	-0+15	11.41	12.58	18.85
-0+00	30.45	16.17	32.14	-0+00	10.62	6.12	24.97
0+24.99	22.33	24.43	56.57	0+24.99	13.50	11.16	36.13
0+50	12.96	16.34	72.92	0+50	10.62	11.17	47.30
1+00	13.13	24.16	97.08	1+00	10.62	19.66	66.96
1+50	13.71	24.85	121.93	1+50	10.62	19.66	86.62
2+00	13.49	25.22	147.15	2+00	10.62	19.67	106.29
2+50	13.64	25.21	172.36	2+50	10.64	19.69	125.98
3+00	13.49	25.14	197.50	3+00	10.62	19.68	145.66
3+50	13.48	24.94	222.44	3+50	10.62	19.66	165.33
4+00	13.69	25.12	247.56	4+00	10.62	19.66	184.99
4+50	13.45	25.09	272.65	4+50	10.62	19.66	204.66
5+00	13.37	24.83	297.48	5+00	10.62	19.66	224.32
5+50	13.47	24.62	322.10	5+50	10.62	19.66	243.98
5+63.29	13.45	6.53	328.63	5+63.29	10.74	5.26	249.25
5+87.52	18.67	14.97	343.60	5+87.52	5.31	6.62	255.86
6+11.75	12.96	14.84	358.45	6+11.75	10.62	6.55	262.41
6+50	14.41	19.32	377.77	6+50	10.62	15.04	277.46
7+00	14.19	26.48	404.26	7+00	10.62	19.66	297.12
7+50	13.51	25.61	429.87	7+50	10.62	19.66	316.78
8+00	14.74	26.16	456.03	8+00	10.62	19.66	336.45
8+50	13.35	26.01	482.04	8+50	10.62	19.66	356.11
8+65.54	12.96	7.57	489.61	8+65.54	15.70	7.58	363.69

26TH CT N Stub St CY Excavation (unadjusted)				26TH CT N Stub St CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
0+28.81	12.96	0.00	0.00	0+28.81	10.74	0.00	0.00
0+50	13.00	10.19	10.19	0+50	11.41	8.63	8.63
1+00	14.32	25.01	35.20	1+00	9.66	19.52	28.15
1+15.77	11.62	7.58	42.78	1+15.77	11.68	6.23	34.38

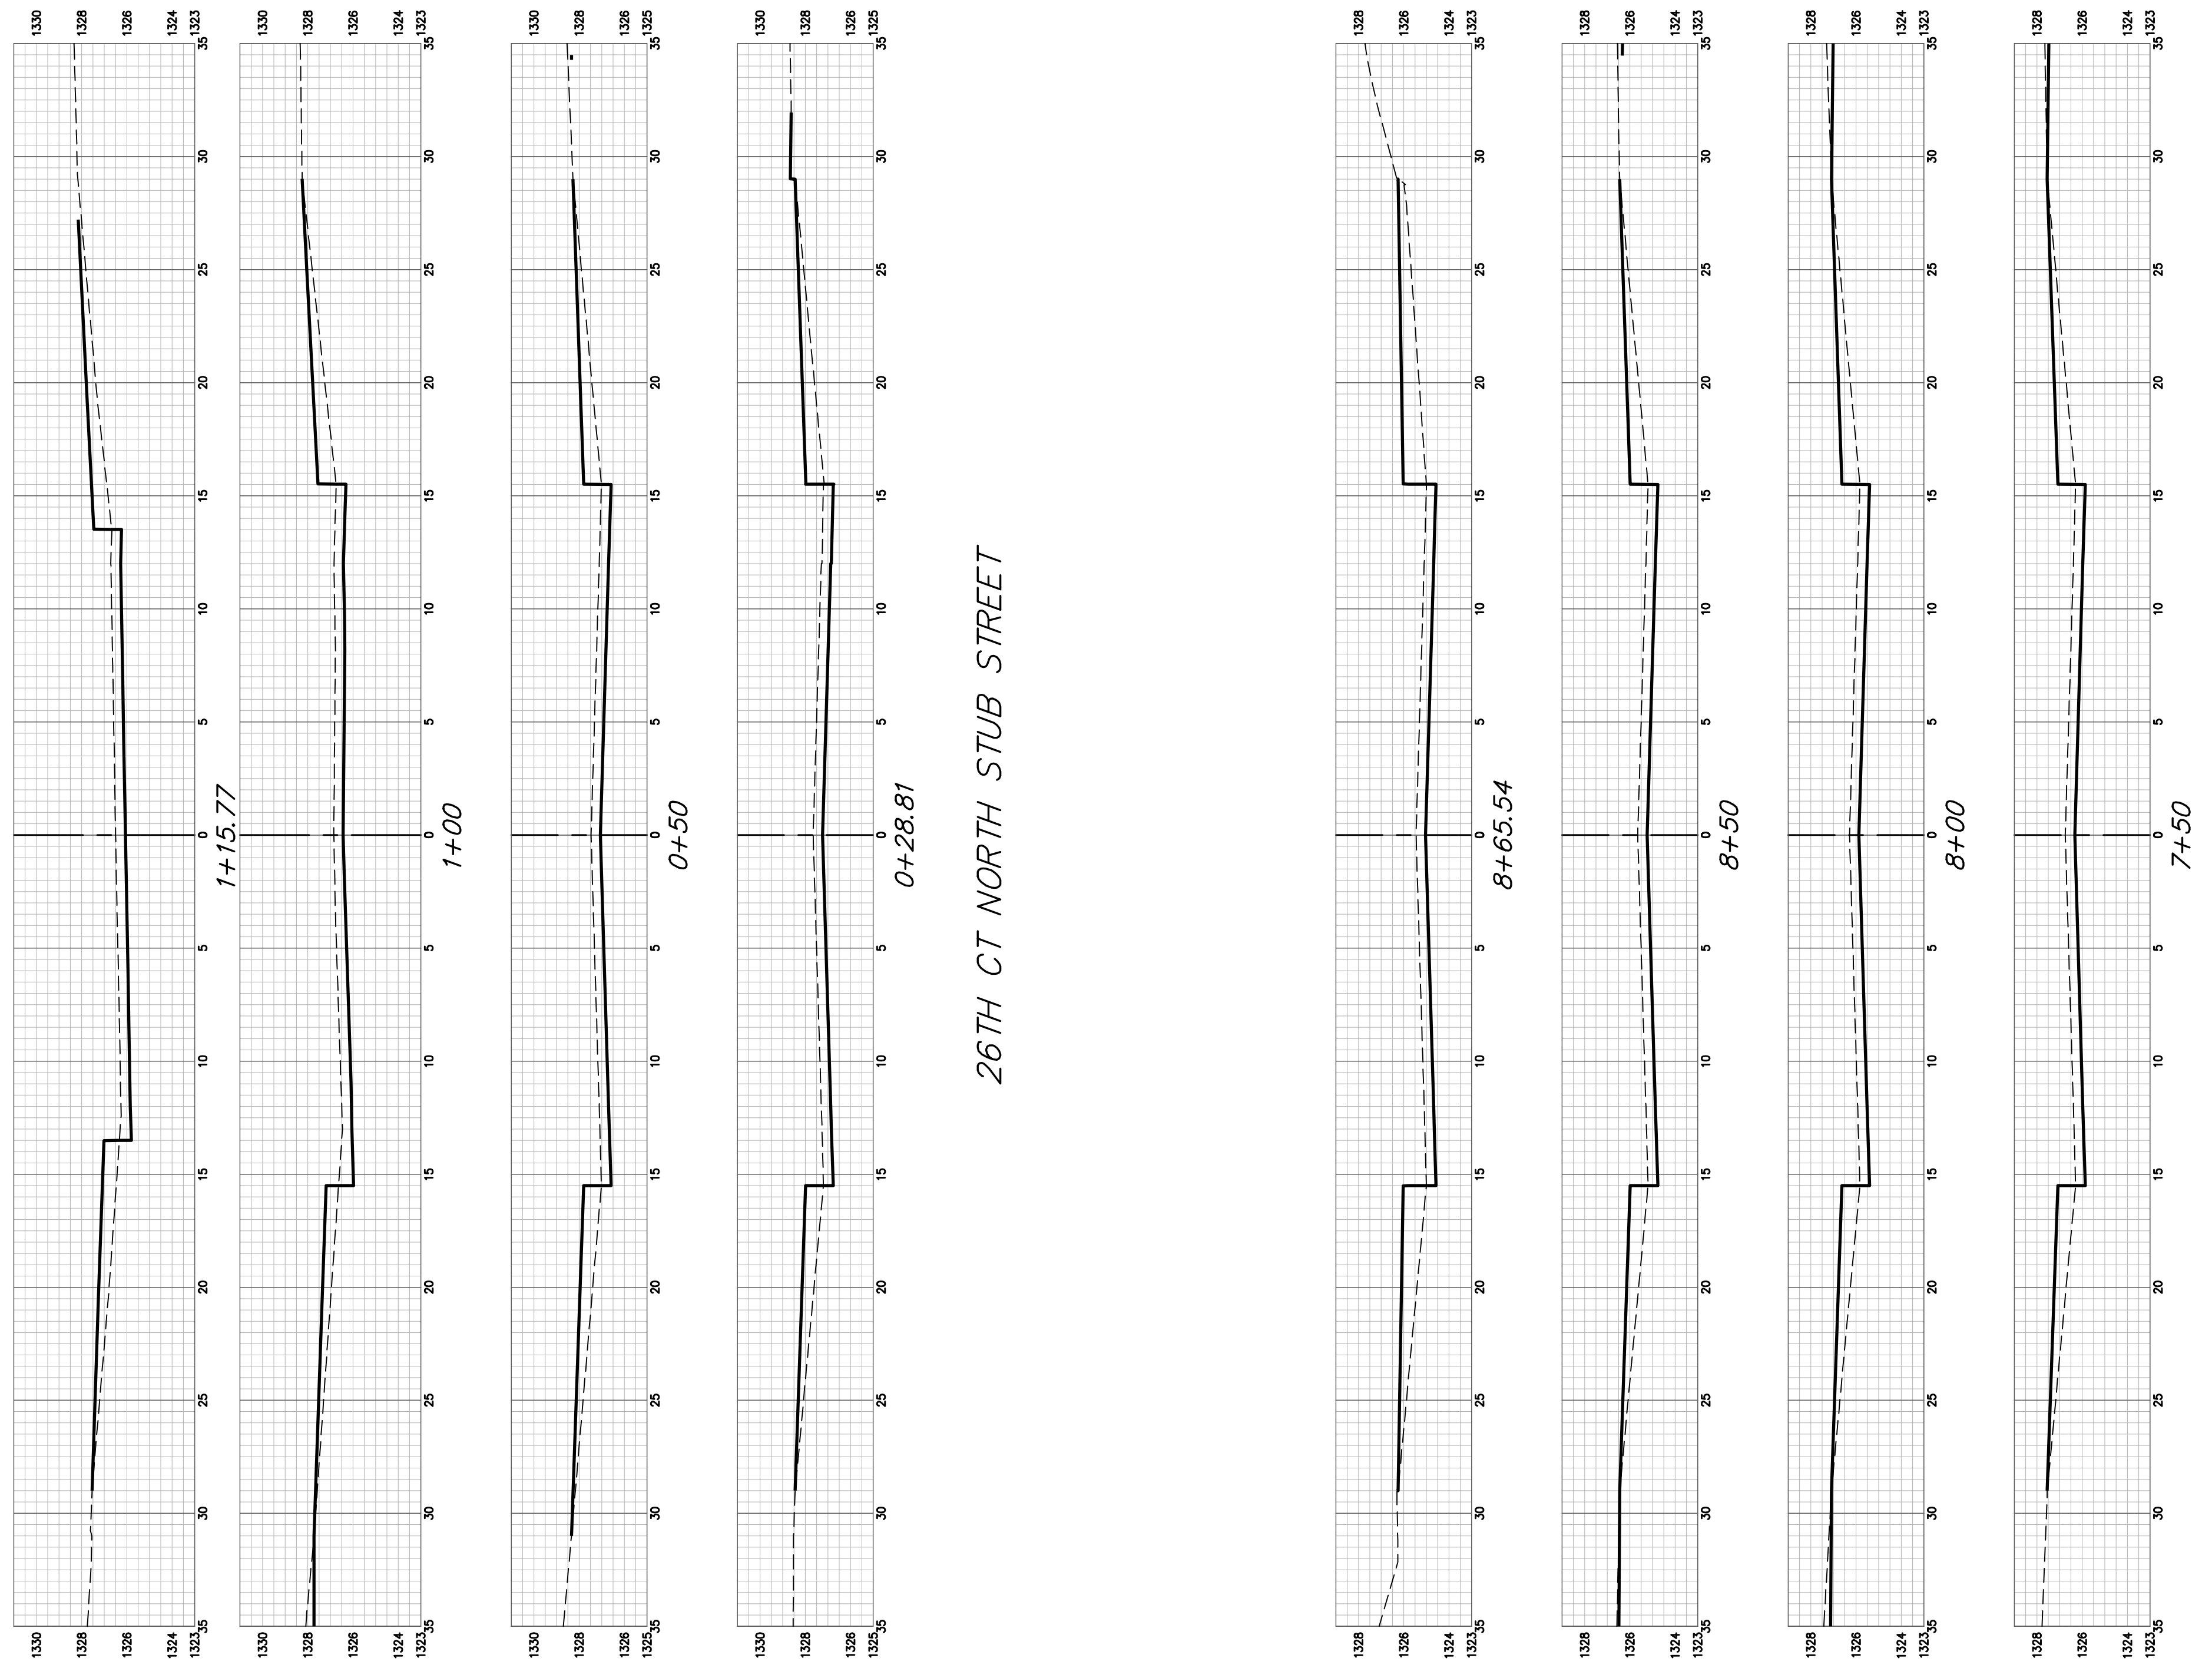

26TH CT NORTH STUB STREET

26TH CT NORTH