

FHWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87U-1362-01	1993	55	149

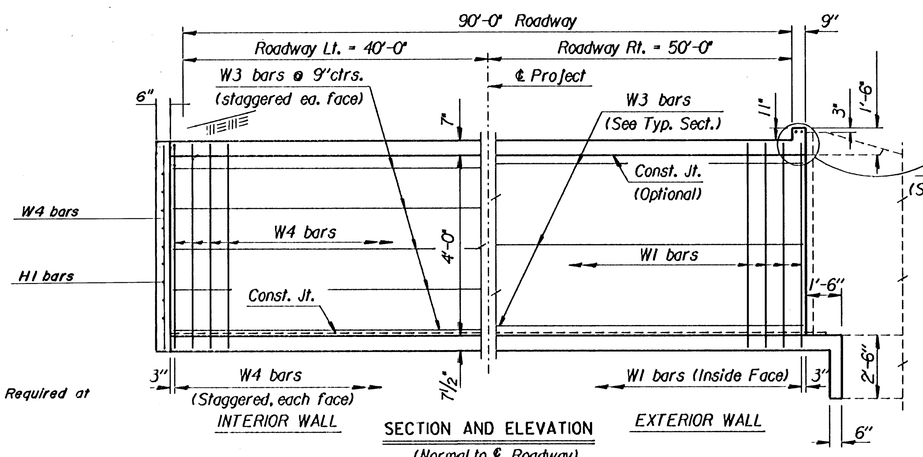


Note: Wingwall Required at Rt. only.

SECTION AND ELEVATION
(Normal to ℄ Roadway)


Contractor shall field bend bars as required

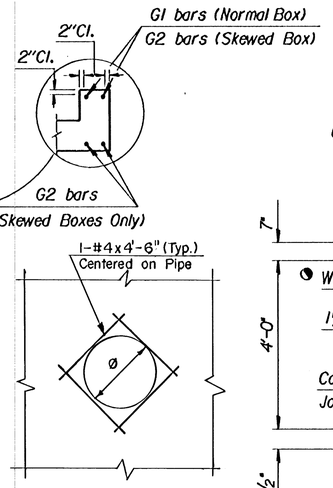

TYPICAL STORM SEWER CONNECTION AT RCB
(Max. 24" Diameter)
(Subsidiary to Storm Sewer Bid Item)

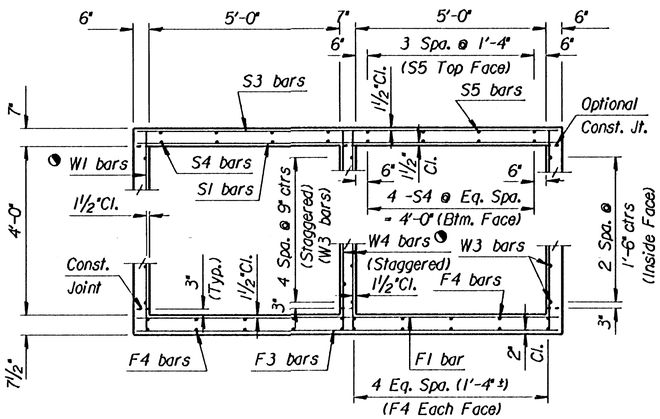


TYPICAL SECTION



PLAN OF INTERIOR WALL

◔ See RCB Auxiliary Details for Optional Splice.

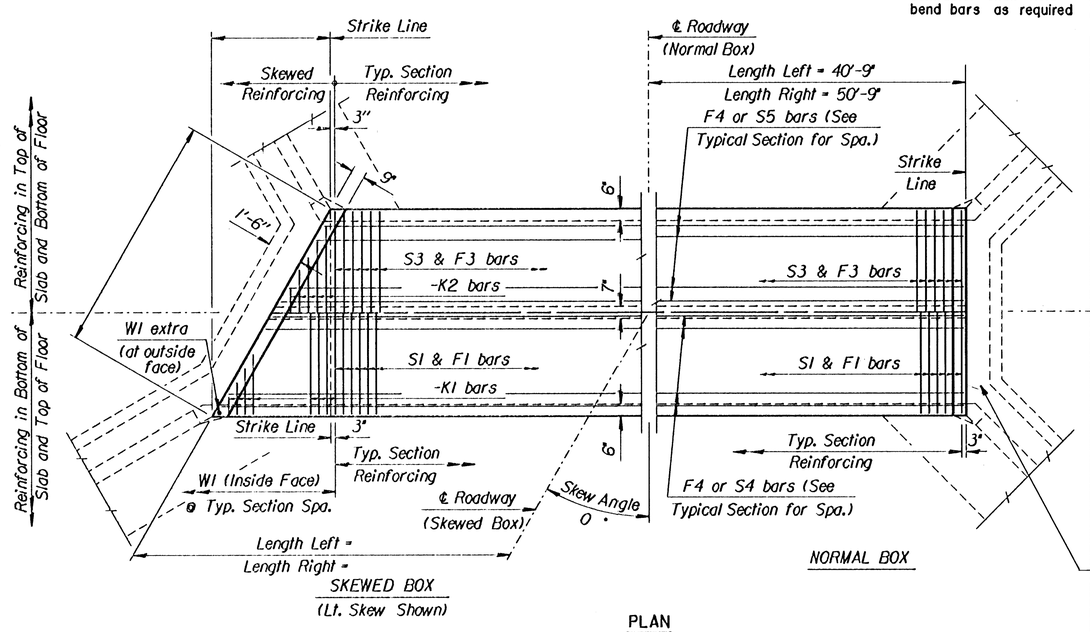

PLAN

GENERAL NOTES

LOADING: HS20-44 AASHTO Specifications, 1983 Edition.
UNIT STRESSES: Class AAA Concrete; f'c = 4,000 p.s.i.
Reinforcing Steel; fy = 60,000 p.s.i.
FILL HEIGHT: Unless otherwise noted, the Design Fill Height is measured from the riding surface at the culvert and shall include the surfacing.
CONCRETE: Class AAA Concrete shall be used throughout. Bevel all exposed edges with a ¾ inch triangular moulding. Where Class AAA Concrete (AE) is specified, it shall be placed in the top slab above the Construction Joint.
REINFORCING: All reinforcing shall conform to ASTM A615, Grade 60. All dimensions relative to reinforcing steel shall be to centerline of bar unless otherwise noted.
EXCAVATION: Excavation for culverts less than bridge length shall not be paid for directly but shall be subsidiary to Class AAA Concrete. Excavation for RCB Bridges shall be paid for as Class III Excavation.
SEAL COURSE: A Seal Course may be required by the Engineer. The Seal Course shall be unreinforced Concrete (Commercial Grade) to a minimum depth of 3 inches or as determined by the Engineer. Concrete for the seal course shall be paid for at the unit price of Class AAA Concrete.
FOUNDATION STABILIZATION: Foundation Stabilization may be required as directed by the Engineer. The depth of Foundation Stabilization shall be determined by the Engineer. Foundation Stabilization shall be paid for at the determined Unit Price set for Foundation Stabilization. See Auxiliary Details.
QUANTITIES: The quantities shown in the Culvert Summary include apron and/or soil saver quantities when their construction is required by the plans. Payment for additional quantities that result from including seal course and/or floating apron, as a change in original plans, shall be made at the Unit Price bid for the various items involved. Wingwall quantities shown include all quantities outside the neat lines of the box.
GRANULAR BACKFILL (WINGWALLS): Special backfill procedures may be required at the direction of the Engineer. See Auxiliary Details Sheet.
STRIKE LINE: Wingwalls and that portion of the RCB outside the Strike Line shall be constructed level. Footing for wingwalls shall be constructed with the culvert floor. See wingwall detail sheet.

CULVERT SUMMARY

Flow Line Elev. Lt.	Flow Line Elev. Rt.	Crown Gr. Elev.	Design Fill Ht.	Skew	Left Wings	Right Wings	Scour Apron	Soil Saver	Granular Backfill	Concrete			Reinf. Steel (Gr. 60)		
										Barrel (Cu.Yds.)	Wings (Cu.Yds.)	Total (Cu.Yds.)	Barrel (Lbs.)	Wings (Lbs.)	Total (Lbs.)
192.50	192.30	199.72	5	0	FLARED	FLARED	YES	NO	NO	70.0	7.7	77.7	8303.40	419.72	8723.12

BAR SCHEDULE

F1				F3				F4				S1				S3				S4				S5			
Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	No.	Length	Size	No.	Length
4	9"	122	11'-3"	-	-	-	-	4	7½"	147	11'-3"	4	60	31'-4"	4	9"	122	11'-3"	-	-	-	-	4	7½"	147	11'-3"	4	24	31'-4"	4	24	31'-4"

K1				K2				W1				W2				W3			W4				G1			G2			H1			
Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	Spa.	No.	Length	Size	No.	Length		Size	No.	Length	Size	Spa.	No.	Length	Size	No.	Length	Size	No.	Length	Size	Spa.	No.	Length
-	-	-	*	-	-	-	*	4	9"	244	4'-11"	-	-	-		4	33	31'-4"	4	9"	138	4'-11"	5	4	11'-3"	-	-	-	4	6"	9	11'-3"

* See Bending Diagram

Minimum Splice Lengths	
#4	1'-4"
#5	1'-8"
#6	2'-0"

SUMMARY OF QUANTITIES

Class AAA Concrete	77.7	C.Y.
Class AAA Concrete (AE)	0.0	C.Y.
Class III Excavation		C.Y.
Reinforcing Steel (Gr. 60)	8730	Lbs.
Reinforcing Steel (Epoxy Coated)	0	Lbs.
Foundation Stabilization (Set)	1	C.Y.
Granular Backfill (Wingwalls) (Set)	1	C.Y.

NO.	DATE	REVISIONS	BY	APP'D

KANSAS DEPARTMENT OF TRANSPORTATION
Sta. 41+40
DOUBLE 5' x 4' RCB

~~Std. No. 2.05.04~~ SEDGWICK CO.

FHWA APPROVAL		6-5-91	APP'D	KENNETH F. HURST
DESIGNED	DETAILED		QUANTITIES	TRACED
DESIGN CK.	DETAIL CK.		QUAN.CK.	TRACE CK.

55

ORIG. FROM BRUG.	DESIGN	DETAIL	QUANTITIES	STRUCTURES	DESIGN	DETAIL	QUANTITIES	STRUCTURES
	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE

LPROJECTS		
ZFA24\200.23\mked01.dgn		View
25-NOV-1992 08:55		