


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0673-01	2017	53	99

DATE	
BY	
REFERENCES NOTED	
REFERENCES CHECKED	

Drawn By : examples
 Plotted : 11/14/2017
 File : c:\transystems\pw_local\transyscorp-pw\ccbank\k0521528\C-FIB-M01-118.dgn

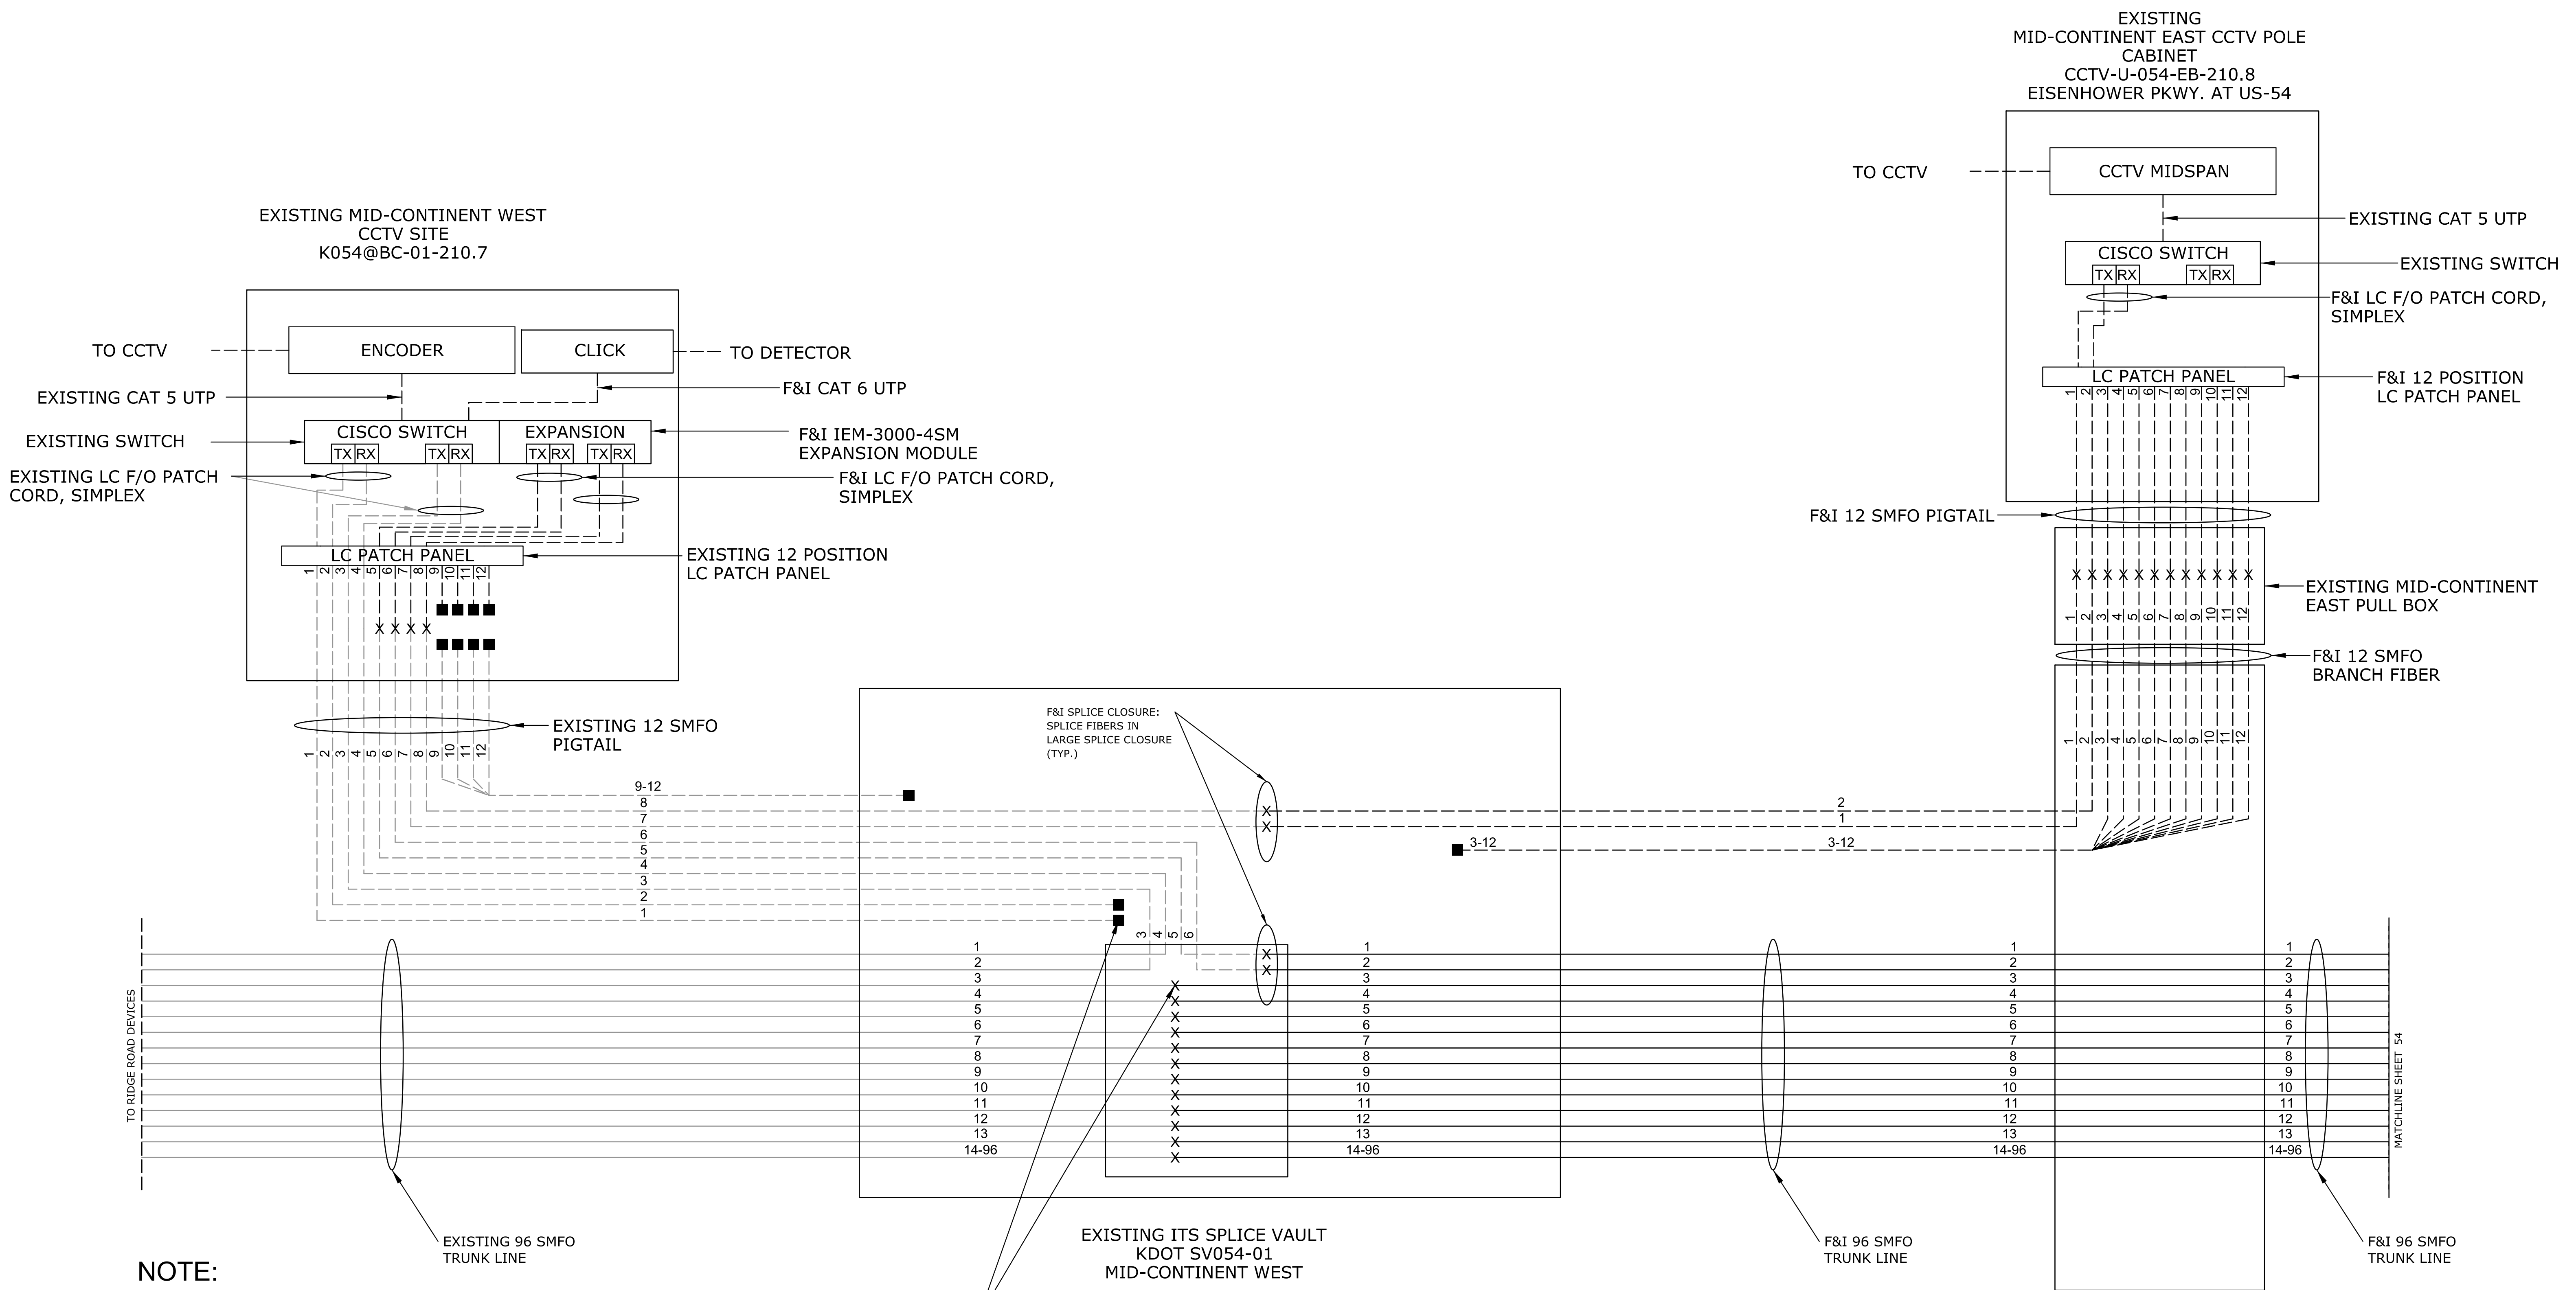

NOTE:

ACTUAL FIBER CONNECTIONS, SWITCH CONFIGURATION, AND PORT ASSIGNMENT SUBJECT TO CHANGE. KDOT NETWORK ENGINEER TO APPROVE FINAL FIBER CONNECTION PLANS

SPLICE IN KDOT SPLICE VAULT. COIL ALL SLACK CABLE IN KDOT SPLICE VAULT. DO NOT SPLICE IN CITY COMMUNICATION DUCT VAULT.

ALL LABOR, MATERIALS AND EQUIPMENT NECESSARY FOR FIBER OPTIC WORK SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE SUBSIDIARY TO THE LUMP SUM BID ITEM FOR SITE 18.

CUT PIGTAIL 1 & 2 AND LEAVE UNTERMINATED; SPLICE TRUNK LINE 3 & 4 TO NEW TRUNK LINE 3 & 4

LEGEND:

X	=	FIBER OPTIC SPLICE
RX	=	RECEIVE
TX	=	TRANSMIT
F/O	=	FIBER OPTIC
■	=	UNTERMINATED FIBER
—	=	SINGLE MODE FIBER OPTIC

KANSAS DEPARTMENT OF TRANSPORTATION
 SITE 18
 US-54 FIBER OPTIC PLAN
 FIBER OPTIC SCHEMATIC
 SHEET 1 OF 2