STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0673-01	2017	56	99

GENERAL NOTES:

1. POWER SUPPLY ASSEMBLIES AND CONNECTIONS SHALL BE MOUNTED A MINIMUM OF 12 IN ABOVE THE BOTTOM OF GROUND MOUNTED CABINETS.
2. CONTRACTOR SHALL SUBMIT ACTUAL CABINET ELEVATIONS TO ENGINEER FOR APPROVAL PRIOR TO INSTALLATION.
3. SEE ITS PLANS AND SPECIFICATIONS FOR EQUIPMENT TO BE INCLUDED IN CABINETS.
4. DOOR FILTERS SHALL HAVE FULL BACK PLATES ENCLOSING FILTER AND HOLDING FILTER IN PLACE.
5. PROVIDE A RACK ELEVATION DRAWING FOR EACH ITS CABINET WITHIN THE PROJECT SHOWING THE FRONT, REAR, AND SIDE VIEWS FOR PROPOSED EQUIPMENT PLACEMENTS. CLEARLY INDICATE EQUIPMENT DIMENSIONS ON ELEVATION DRAWINGS.

✳✳6. PROVIDE A SECOND DIN RAIL WITH BRACKET ADAPTER FOR ITS EQUIPMENT IF ADDITIONAL SPACE IS REQUIRED, OR AS REQUESTED BY THE ENGINEER. SECOND DIN RAIL WITH BRACKET ADAPTER SHALL BE INCIDENTAL TO THE SITE BID ITEM.

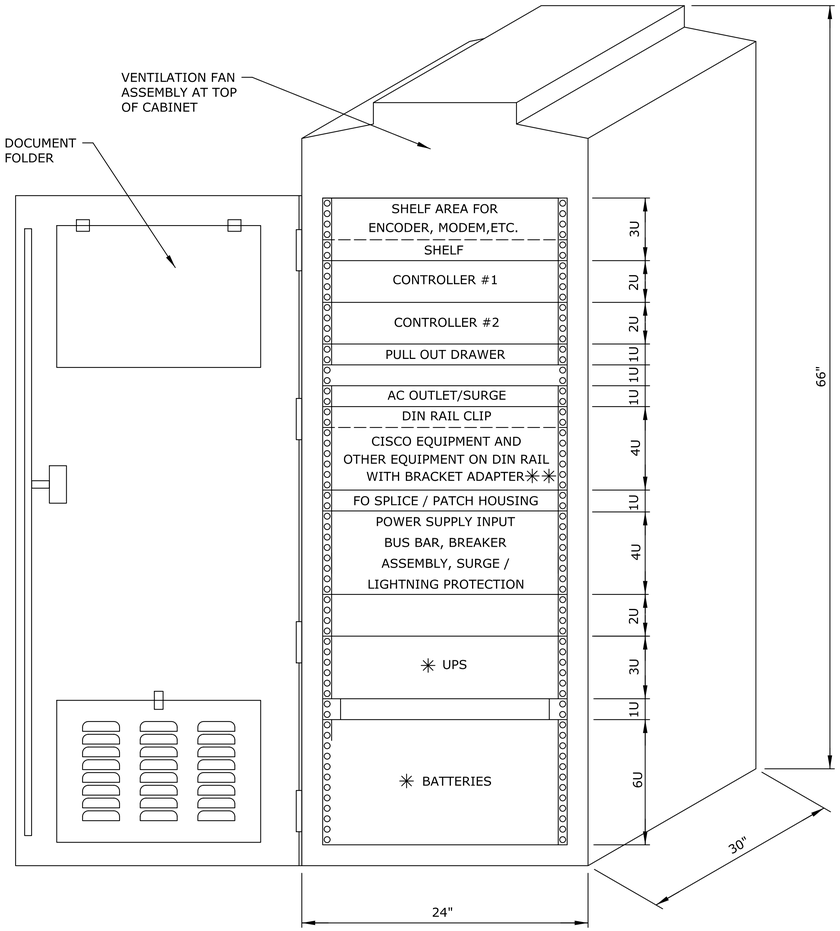

TYPICAL TYPE 334 CABINET

NOTE: 1U = 1.75 INCHES

✳ UPS + BATTERIES INCLUDED ONLY WHERE NOTED

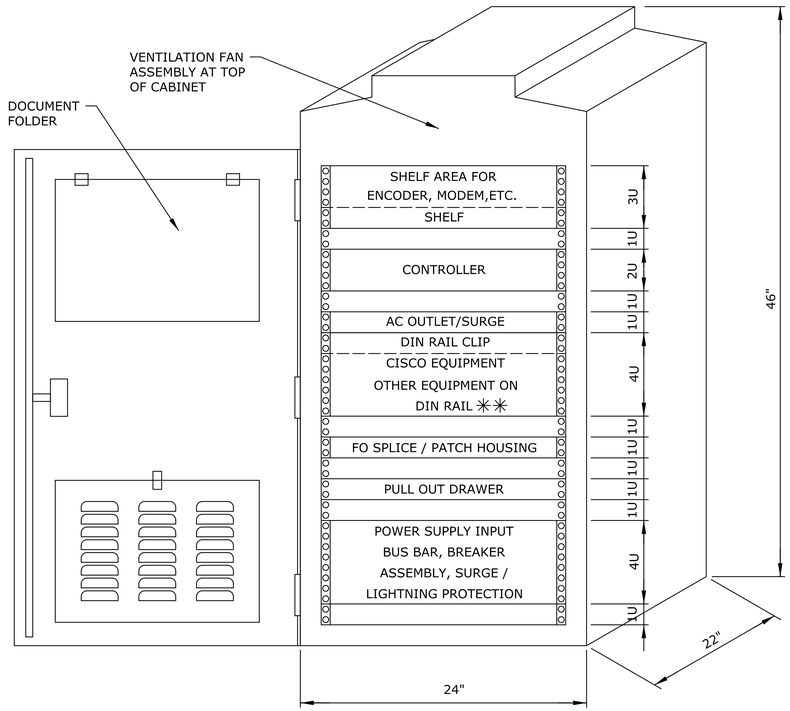

TYPICAL TYPE 336S CABINET

NOTE: 1U = 1.75 INCHES

NO.	DATE	REVISIONS	BY	APP'D

KANSAS DEPARTMENT OF TRANSPORTATION

TYPICAL 334 AND 336S CABINET LAYOUT

ITS-D04 VERSION DATE: 05-29-17

APP'D			
DESIGNED	DETAILED	QUANTITIES	TRACED
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK.

CADconform Certify This File

Plotted : 14-NOV-2017 10:55
Drawn By : examples
File : ITS-D04.dgn