

## GENERAL NOTES:

1. The Contractor shall comply with all applicable safety regulations. All construction shall be completed following current City Standard Specifications and Special Provisions.

2. Contractor will be required to provide notice to utility companies a minimum of seventy-two (72) hours prior to any excavation, as follows:

Kansas One-Call 687-2470

The Contractor must notify the following in case of an emergency:

AT&T	1-800-246-8464
Black Hills Energy	1-800-694-8989
City of Wichita Water & Sewer	1-316-219-8921
City of Wichita Stormwater	1-316-268-4090
City of Wichita Traffic	1-316-268-4034
Cox Communications	1-888-249-3530
Kansas Gas Service	1-888-482-4950
Westar Energy	1-800-544-4857

3. Utility service lines, poles, etc. are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.

4. Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain will require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits will require additional archaeological investigations unless buried in a previously approved borrow location.

5. Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor with the City Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.

6. The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days notice prior to start of construction.

7. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws.



1 Revised to applicable cover sheet notes.  
04/17/2018

# STORM WATER DRAIN #424 Cheryl's Hollow Second Addition


Lots 14-34 Block 2, Lots 1-15 Block 3,

Lots 1-11 Block 18 Block 10  
CITY OF WICHITA, KANSAS

Gary Janzen, P.E. City Engineer

Project Number: 468-85232

OCA: 751568

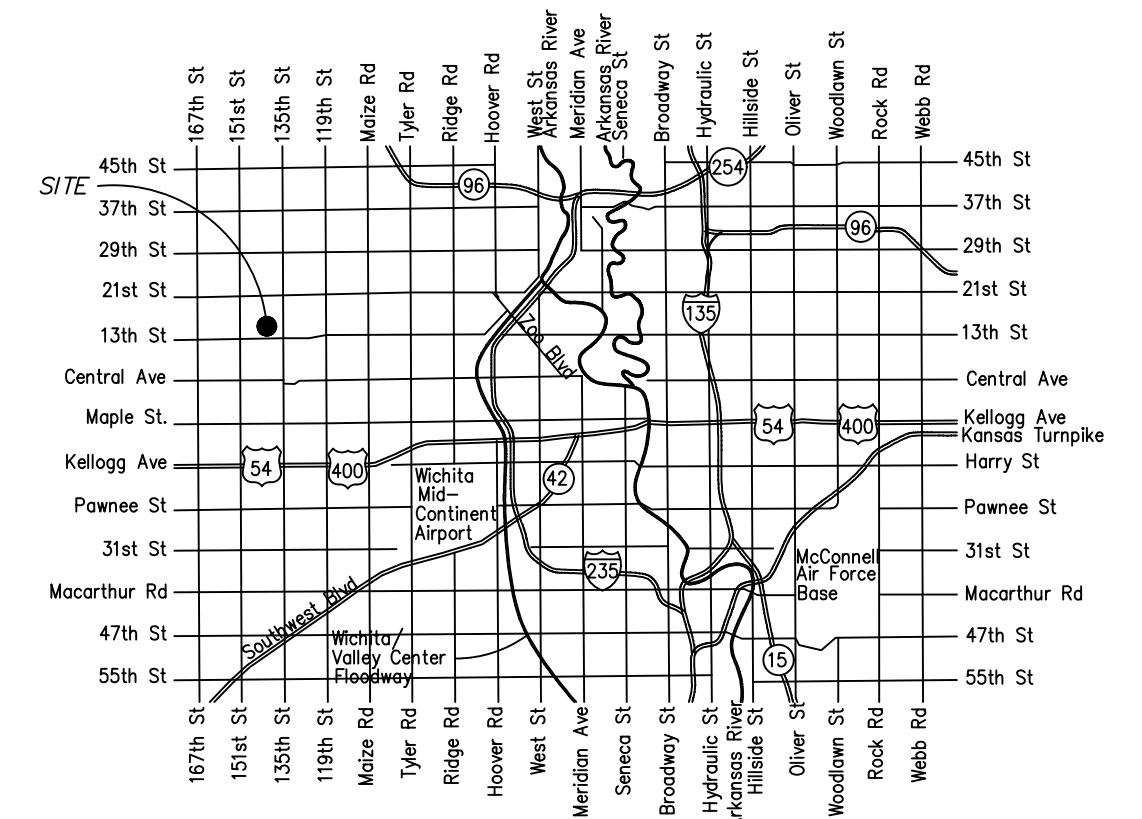

## Vicinity Map

## INDEX OF SHEETS:

- 1.0 Cover Sheet
- 2.0 Existing Drainage Plan
- 3.0 Proposed Drainage Plan
- 4.0 Pond Detail
- 5.0 Mass Grading Plan
- 6.0 Copy of Plat

## Benefit Districts:




Benefit Area

## Benchmarks

BM#1:  
Chiseled Square on the Top of Curb on the South Side of Autumn Ridge, 98' East of the East Line of Cheryl's Hollow 2nd Addition.  
Elev. = 1364.26 NAVD88

BM#2:  
Chiseled Square on the Top of Curb at the West Curb Return at the Northeast Corner of Hunter's View and Stout.  
Elev. = 1364.76 NAVD88

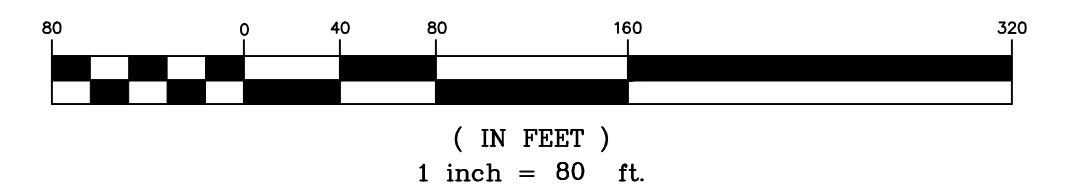

Developer: Progressive Opportunities, LLC  
4313 N. 119th St. W. Maize, KS 67101-9530

December 2017

**KEMILLER**  
ENGINEERING PA  
117 E. Lewis, Wichita, KS 67202 (316)264-0242