FHWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 N-0092-01	1999	6	75

STEVENS SECOND ADDITION

Lot 1

Lot 2

Part of Reserve A McADAM ACRES ADDITION

OLIVER STREET

Sta. 5+869.4 to Sta. 5+929.2 Construct 1.800 m sidewalk w/ retaining wall. See detail Sheet 7.

Sta. 5+876 to Sta. 5+925 Saw cut & remove exist. parking in order to construct retaining wall.

Sta. 5+890.594, Lt. Saw cut and remove existing drive as shown and construct Ramp Drive. Replace existing drive as shown. W = 5.0 P = 1.8

Sta. 5+913.108, Lt. Saw cut and remove existing drive as shown and construct Ramp Drive. Replace existing drive as shown. W = 9.2 P = 1.9

Sta. 5+932.090, Lt. Saw cut and remove existing drive as shown and construct Ramp Drive. Replace existing drive as shown. W = 5.9 P = 5.0

Sta. 5+963.165, Lt. Saw cut and remove existing drive as shown and construct Full Radius Drive. W = 7.2 P = 6.2

Sta. 5+945 to Sta. 5+959.523 Construct 1.525 m sidewalk w/ retaining wall. See detail Sheet 7.

Sta. 5+973.343, Lt. Construct Type 22 Curb Inlet (See note) W = 1.250 m L = 1.525 m Rim = 39.185 FL = 38.060 (Match Exist.)

See Sheet No's. 9–12 for Water Main Replacement.

See Sheet No. 8 for Storm Sewer Construction Details.

See Sheet No. 7 for Intersection Construction Details.

All existing curb & gutter and pavement to be removed within limits of construction.


Sta. 5+901.524, Rt. Saw cut and remove existing drive as shown and construct Full Radius Drive. Replace existing drive as shown. W = 9.1 P = 5.8


Sta. 5+925.384, Rt. Saw cut and remove existing drive as shown and construct Full Radius Drive. Replace existing drive as shown. W = 8.9 P = 6.2

Sta. 5+964.778, Rt. Saw cut and remove existing pavement to limits shown. Construct reinforced concrete valley gutter.

Sta. 5+993.272 End Construction

SCALE:
PLAN 1:200
PROFILE 1:200 HORIZ.
1:10 VERT.

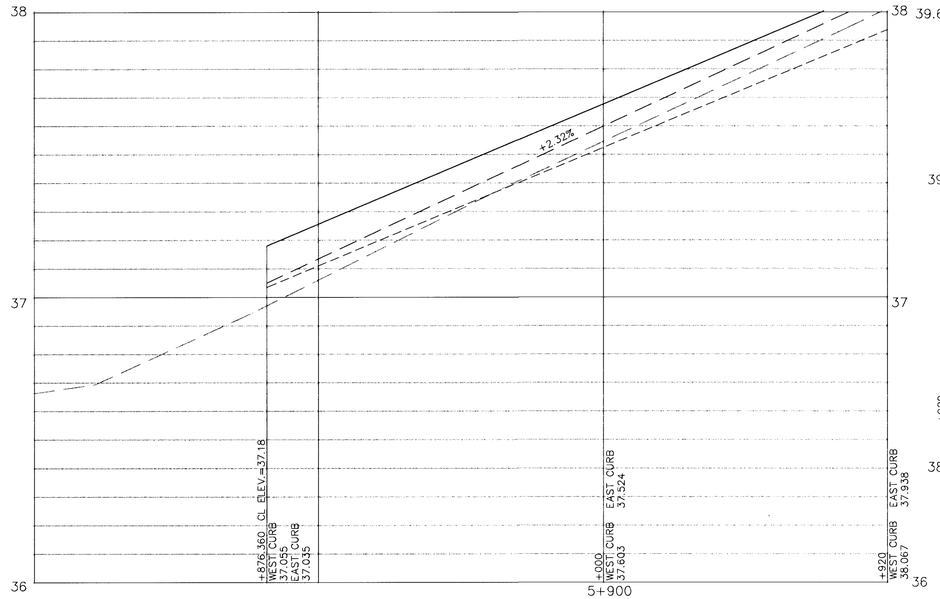

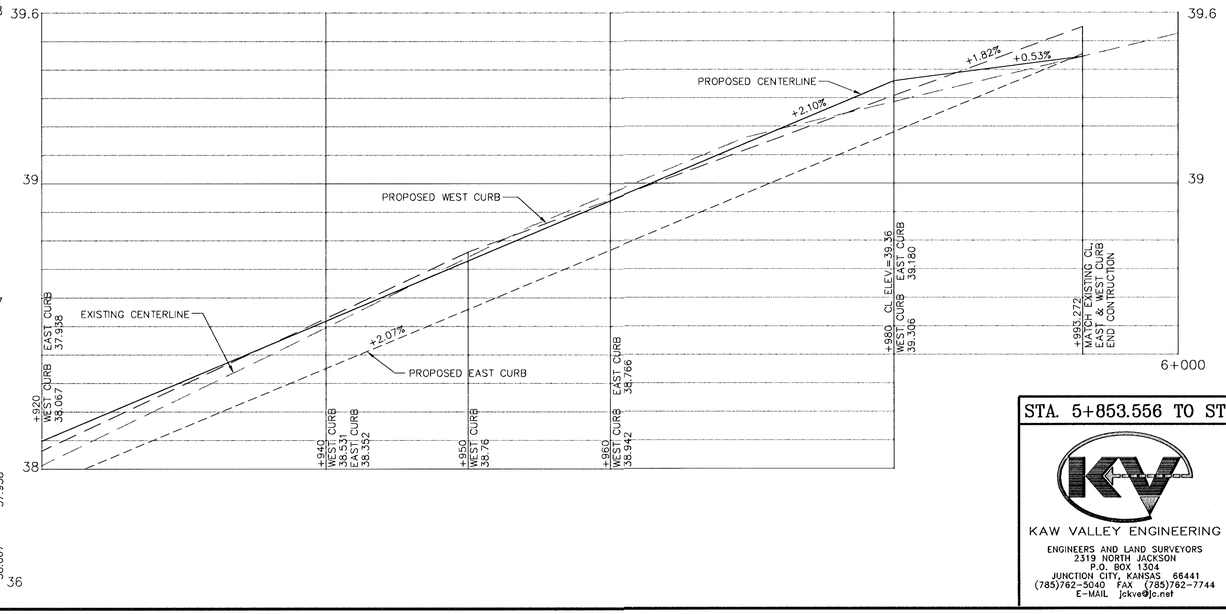

STA. 5+853.556 TO STA. 5+993.272

KAW VALLEY ENGINEERING
ENGINEERS AND LAND SURVEYORS
2319 NORTH JACKSON
P.O. BOX 1304
JUNCTION CITY, KANSAS 66441
(785)762-5040 FAX (785)762-7744
E-MAIL jckve@jc.net

PROJ. NO.	97-1827
DATE	JULY 1999
DESIGNER	KB/SM
DRAWN BY	JO
CHECKED BY	
CFN	18270LIV
SHEET	6 OF 75

I:\e\DWG\182\182\0liv.dwg Mon May 01 14:33:47 2000 JULIE