

GENERAL NOTES:

1. The Contractor shall comply with all applicable safety regulations. All construction shall be completed following current City Standard Specifications and Special Provisions.

2. Contractor will be required to provide notice to utility companies a minimum of seventy-two (72) hours prior to any excavation, as follows:

Kansas One-Call 687-2470

The Contractor must notify the following in case of an emergency:

AT&T 1-800-246-8464
 Black Hills Energy 1-800-694-8989
 City of Wichita Water & Sewer 1-316-219-8921
 City of Wichita Stormwater 1-316-268-4090
 City of Wichita Traffic 1-316-268-4034
 Cox Communications 1-888-249-3530
 Kansas Gas Service 1-888-482-4950
 Westar Energy 1-800-544-4857

3. Utility service lines, poles, etc. are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.

4. Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain will require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits will require additional archaeological investigations unless buried in a previously approved borrow location.

5. Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor with the City Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.

6. The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days notice prior to start of construction.

7. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws.

8. The Engineering Division shall field locate water valves one time during construction when requested by the Contractor. It shall be the Contractor's responsibility to preserve such field locations during the construction process. Water valves, valve boxes or fire hydrants damaged during construction shall be repaired by Contractor at his own expense. Valve boxes and water meters within the project limits shall be adjusted to match final grades by the contractor.

9. The Contractor shall notify the inspecting engineer and Tom Mason at 316-268-4574 with the City of Wichita with the anticipated construction start date and notify them of project completion. Staking and inspection for this project will be the responsibility of the Contractor.

10. If traffic will be impacted by construction, a traffic control plan must be submitted and approved by the City Traffic Engineer, Brian Coon at traffic@wichita.gov before construction can begin. The Contractor shall be responsible for all traffic control measures to facilitate construction. All construction zone markings and signage shall conform to the latest version of the Manual on Uniform Traffic Control Devices (MUTCD) as published by the US Dept. of Transportation, Federal Highway Administration. All costs associated with construction markings and signage shall be the Contractors responsibility.

11. All elevations shown are NAVD 88.

12. All areas disturbed during construction that will not be under proposed pavement shall be restored to match existing conditions.

13. All existing pavement and curb and gutter within the construction limits shall be saw cut, full depth, to the lines shown on the plans, or to the nearest joint, and removed, unless otherwise noted. If removal limits are within three feet of a joint, remove to the joint.

14. All traffic control devices in the work zone (including markings and signs) and their installation and maintenance shall comply with the latest edition of the Manual on Uniform Traffic Control Devices (MUTCD). All traffic control devices in the traveled way or clear zone shall be crashworthy (NCHRP Report 350 or MASH compliant). http://safety.fhwa.dot.gov/roadway_dept/policy_guide/road_hardware/wzd

15. All construction equipment, including vehicles, materials, and debris, shall be stored outside of the clear zone. Where this cannot be achieved the contractor shall place appropriate signs, object identifiers, and/or barricades in compliance with the MUTCD.

16. Except when required for safety, traffic control shall not block any lanes or sidewalks when work is not being performed.

17. Traffic land blockages more than four hours may need permitted. Call 316-268-4501 to determine requirements and request permit.

Project Length:

Thoroughbred St = 476.42'
 Thoroughbred Cir = 417.48'
 Bellick St = 716.11'
 Bellick Ct = 136.00'
 Marold St. = 148.95'

Earthwork Summary:

Excavation = 3,502 C.Y.
 Compacted Fill 90% = 407 C.Y.

Note: Contractor is responsible for wasting the excess material offsite.



DATE: 1.25.2018
 THIS SHEET HAS BEEN
 SIGNED, SEALED AND
 DATED ELECTRONICALLY

January 2018


Thoroughbred, Bellick to serve Cheryl's Hollow Second Addition

Lots 5-7 Block 4, Lots 4-6 Block 5,
 Lots 1-9 Block 8, Lots 10-26 Block 10
 CITY OF WICHITA, KANSAS

Gary Janzen, P.E. City Engineer

Project Number: 472-85405

OCA: 766401

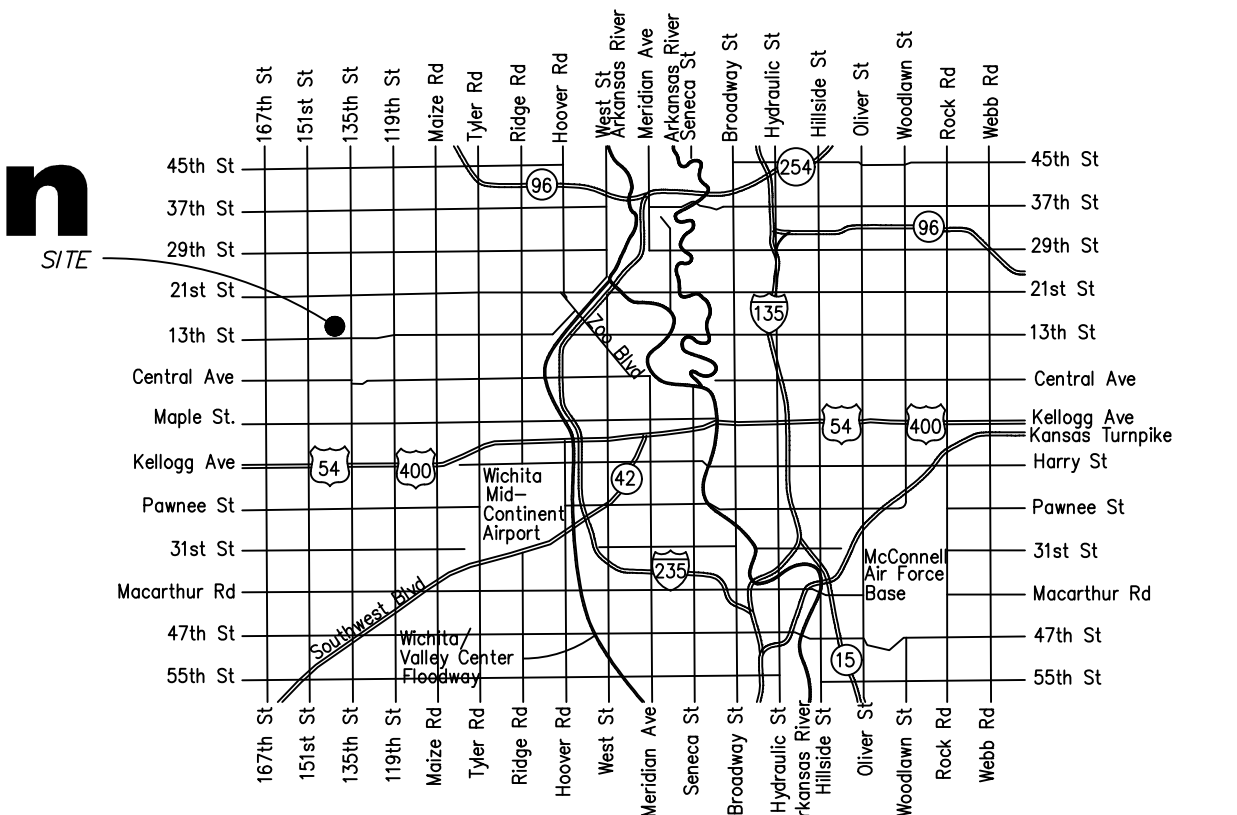

Vicinity Map

Sheet Index

- 1 Title Sheet
- 2 Typical Section
- 3 Control Map
- 4 Thoroughbred St
- 5 Thoroughbred St & Thoroughbred Cir
- 6 Thoroughbred Cir & Marold St
- 7 Bellick St. & Bellick Ct
- 8-9 Bellick St
- 10.0-10.8 Cross Sections
- 10.9 Summary of Earthwork
- 11 Erosion Control Plan
- 12-16 Erosion Control Details (attached or available on the City's website)
- 17 Lot Grading Plan
- 18-19 Standard Paving Details
- 20 Copy of Plat

Benefit Districts:

Benefit Area

Benchmarks

BM#1: Square Cut on Back of Curb, Between Lots 26-27, Block 8, Cheryl's Hollow Second Addition, Wichita, Sedgewick County, Kansas

Elev. = 1368.10 NAVD88

BM#2: MH Rim, Approx. 21' SW of the NW Cor. Lot 9, Block 8, Cheryl's Hollow Second Addition, Wichita, Sedgewick County, Kansas

Elev. = 1367.07 NAVD88



(IN FEET)
 1 inch = 60 ft.

KEMILLER
 ENGINEERING PA
 117 E. Lewis, Wichita, KS 67202 (316)264-0242