

PLAN NOTES:



- BRANCH CIRCUITS ARE INDICATED AS ONE CIRCUIT HOME RUNS WITH INDIVIDUAL NEUTRALS. A MAXIMUM OF THREE CIRCUITS (MAXIMUM OF THREE PHASE CONDUCTORS) MAY BE GROUPED IN A SINGLE CONDUIT. WHERE MULTIPLE CIRCUITS ARE LOCATED IN THE SAME RACEWAY, JUNCTION BOX OR ENCLOSURE, NEUTRALS SHALL BE MARKED OR LABELED TO INDICATE WHICH CIRCUIT THEY ARE ASSOCIATED WITH. SEE SPECIFICATION SECTION "LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES" FOR ADDITIONAL INFORMATION.
- A GROUND CONDUCTOR SIZED PER N.E.C. ARTICLE 250 IS REQUIRED IN ALL CONDUITS.
- CONTROL JUNCTION BOXES SHALL BE SIZED PER THE N.E.C. AS A MINIMUM.
- RUN ALL CONTROL CABLES IN SEPARATE CONDUITS FROM POWER CIRCUITS. RUN SHIELDED CABLES (ANALOG) AND LAN CABLES IN SEPARATE CONDUIT FROM OTHER CONTROL CABLES (DISCRETE).
- SEE CONTROL CABLES CONDUIT SCHEDULE FOR CONTROL CABLE CONDUIT SIZING REQUIREMENTS.
- FURNISH AND INSTALL ALL CONDUIT AND WIRING AS REQUIRED FOR COMPLETE FUNCTIONALITY OF EQUIPMENT AS SPECIFIED AND AS IDENTIFIED BY THE MANUFACTURER. COORDINATE FIELD WIRING REQUIREMENTS WITH EQUIPMENT MANUFACTURER.
- REFER TO CIVIL DRAWINGS AND SECTIONS FOR EXACT EQUIPMENT LOCATIONS.
- LOCATE CONTROLS CONDUIT AND JUNCTION BOXES SO AS NOT TO INTERFERE WITH EQUIPMENT OPERATION, MAINTENANCE, OR REPLACEMENT.
- A CONDUIT FOR ANALOG CABLE SHALL TERMINATE IN EQUIPMENT ENCLOSURE AS CLOSE AS POSSIBLE TO THE TERMINALS. CABLES SHALL NOT PASS NEAR TO CABLES OR EQUIPMENT OPERATING ABOVE 24V.
- INTERNAL AND EXTERNAL I/O SHALL BE LANDED ON TERMINAL STRIPS.
- I/O IDENTIFIED ON CONTROL DIAGRAM SHEETS ARE FOR INPUTS & OUTPUTS EXTERNAL TO THE EQUIPMENT CONTROL PANEL. I/O NECESSARY FOR THE COMPLETE FUNCTIONALITY OF THE EQUIPMENT (INTERNAL I/O) SHALL BE PROVIDED BY THE EQUIPMENT MANUFACTURER. THE CONTRACTOR SHALL FURNISH & INSTALL CONDUIT AND WIRE REQUIRED FOR COMPLETE FUNCTIONALITY OF EQUIPMENT AS SPECIFIED AND AS IDENTIFIED BY THE MANUFACTURER. THE CONTRACTOR SHALL COORDINATE WITH EQUIPMENT MANUFACTURER TO DETERMINE FIELD WIRING REQUIREMENTS.

KEYED NOTES:

- GE 6000 LINE CONTROL CENTER.
- INSTALL NEW INTERPOSING RELAY TO SPLIT LSN-100 SIGNAL TO PLC-100, CP-ST-1, CP-ST-2 AND CP-ST-3.
- TO EXISTING NETWORK RACK.
- PROVIDE NEW 30A BREAKER IN EXISTING GE TYPE CCB PANEL. UPDATE PANEL SCHEDULE.



ELECTRICAL PUMP ROOM PLAN

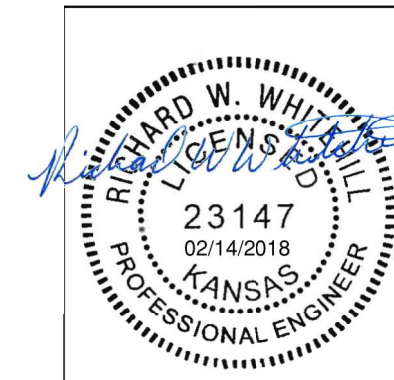

No.	Revision	By	Date
CITY OF WICHITA, KANSAS			
ELECTRICAL PUMP ROOM PLAN			
CHENEY PUMP STATION STRAINER REPLACEMENT			
PEC		PROFESSIONAL ENGINEERING CONSULTANTS, P.A. 303 SOUTH TOPEKA WICHITA, KS 67202 316-262-2691 www.pec1.com	
Designed by	ABP	Job No. 160316-006-0042	Sht. E4 of 8
Drawn by	RWW	Date FEBRUARY 2018	