

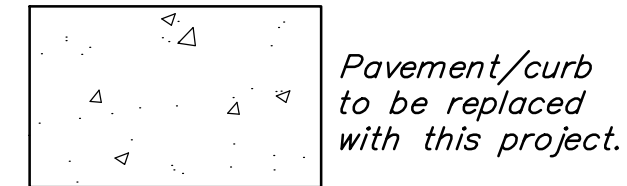


BENCHMARKS:
 BM #1: "X" Chiseled on Top of Curb, approximately 50' east of the NE corner of Lot 1, Block 4, Parkstone Addition.
 Elev. = 1332.03 (NAVD88)


BM #2: "X" Chiseled on Top of Curb, approximately 169' west and 57.5' north of the NE corner of Lot 1, Block 4, Parkstone Addition.
 Elev. = 1327.76 (NAVD88)



15.00
34.50 Proposed Spot Grade
 1335 Proposed Surface

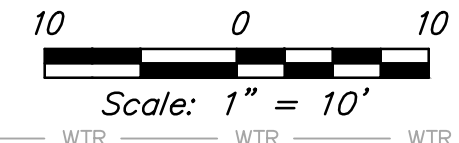

Any areas requiring replacement of asphalt shall be replaced with AC Pavement 5" (3" Bit Base) and Crushed Rock Base 5", Reinforced.

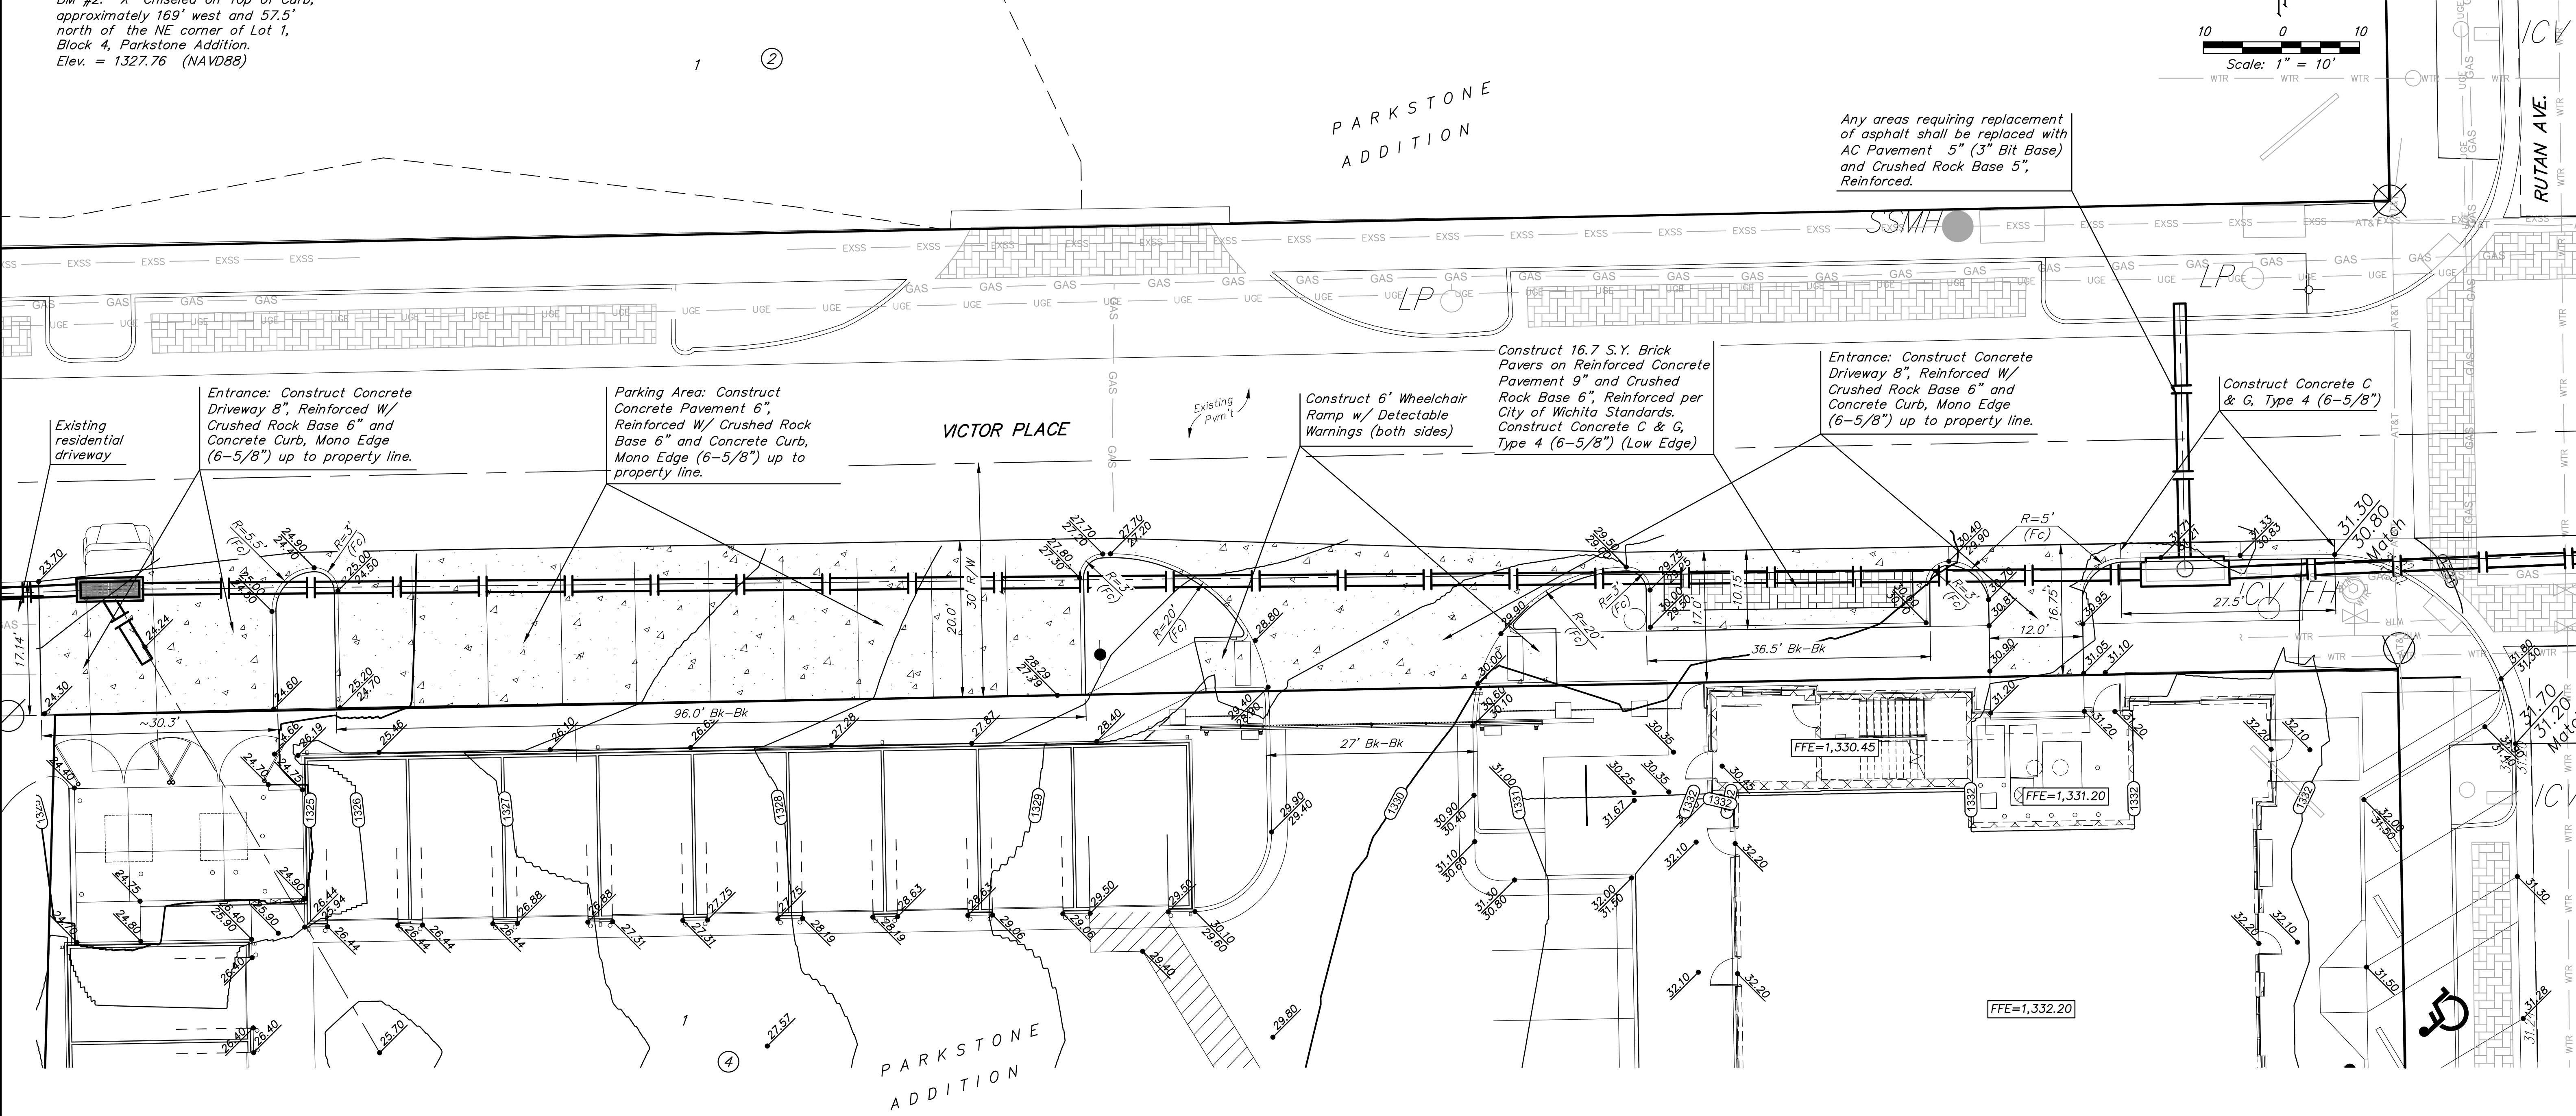

Entrance: Construct Concrete Driveway 8", Reinforced W/ Crushed Rock Base 6" and Concrete Curb, Mono Edge (6-5/8") up to property line.

Parking Area: Construct Concrete Pavement 6", Reinforced W/ Crushed Rock Base 6" and Concrete Curb, Mono Edge (6-5/8") up to property line.

Construct 6' Wheelchair Ramp w/ Detectable Warnings (both sides)

Construct 16.7 S.Y. Brick Pavers on Reinforced Concrete Pavement 9" and Crushed Rock Base 6", Reinforced per City of Wichita Standards. Construct Concrete C & G, Type 4 (6-5/8") (Low Edge)

Entrance: Construct Concrete Driveway 8", Reinforced W/ Crushed Rock Base 6" and Concrete Curb, Mono Edge (6-5/8") up to property line.

Construct Concrete C & G, Type 4 (6-5/8")

FFE=1,330.45

FFE=1,331.20

FFE=1,332.20

