



FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87N-0094-01	1998	137	202

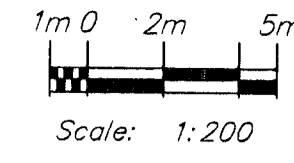

PLANT MATERIAL LOCATION

STATION	CENTER LINE OFFSET	DESCRIPTION
1+537.2	1.4m Lt.	Capital Pear
1+541.0	1.4m Lt.	Capital Pear
1+545.3	1.4m Lt.	Capital Pear
1+556.0	1.5m Lt.	Amur Maple
1+560.0	1.5m Lt.	Amur Maple
1+564.0	1.5m Lt.	Amur Maple
1+574.4	1.5m Lt.	Capital Pear
1+578.6	1.5m Lt.	Capital Pear
1+582.8	1.5m Lt.	Capital Pear

Note: See Plant Schedule for Material Sizes.

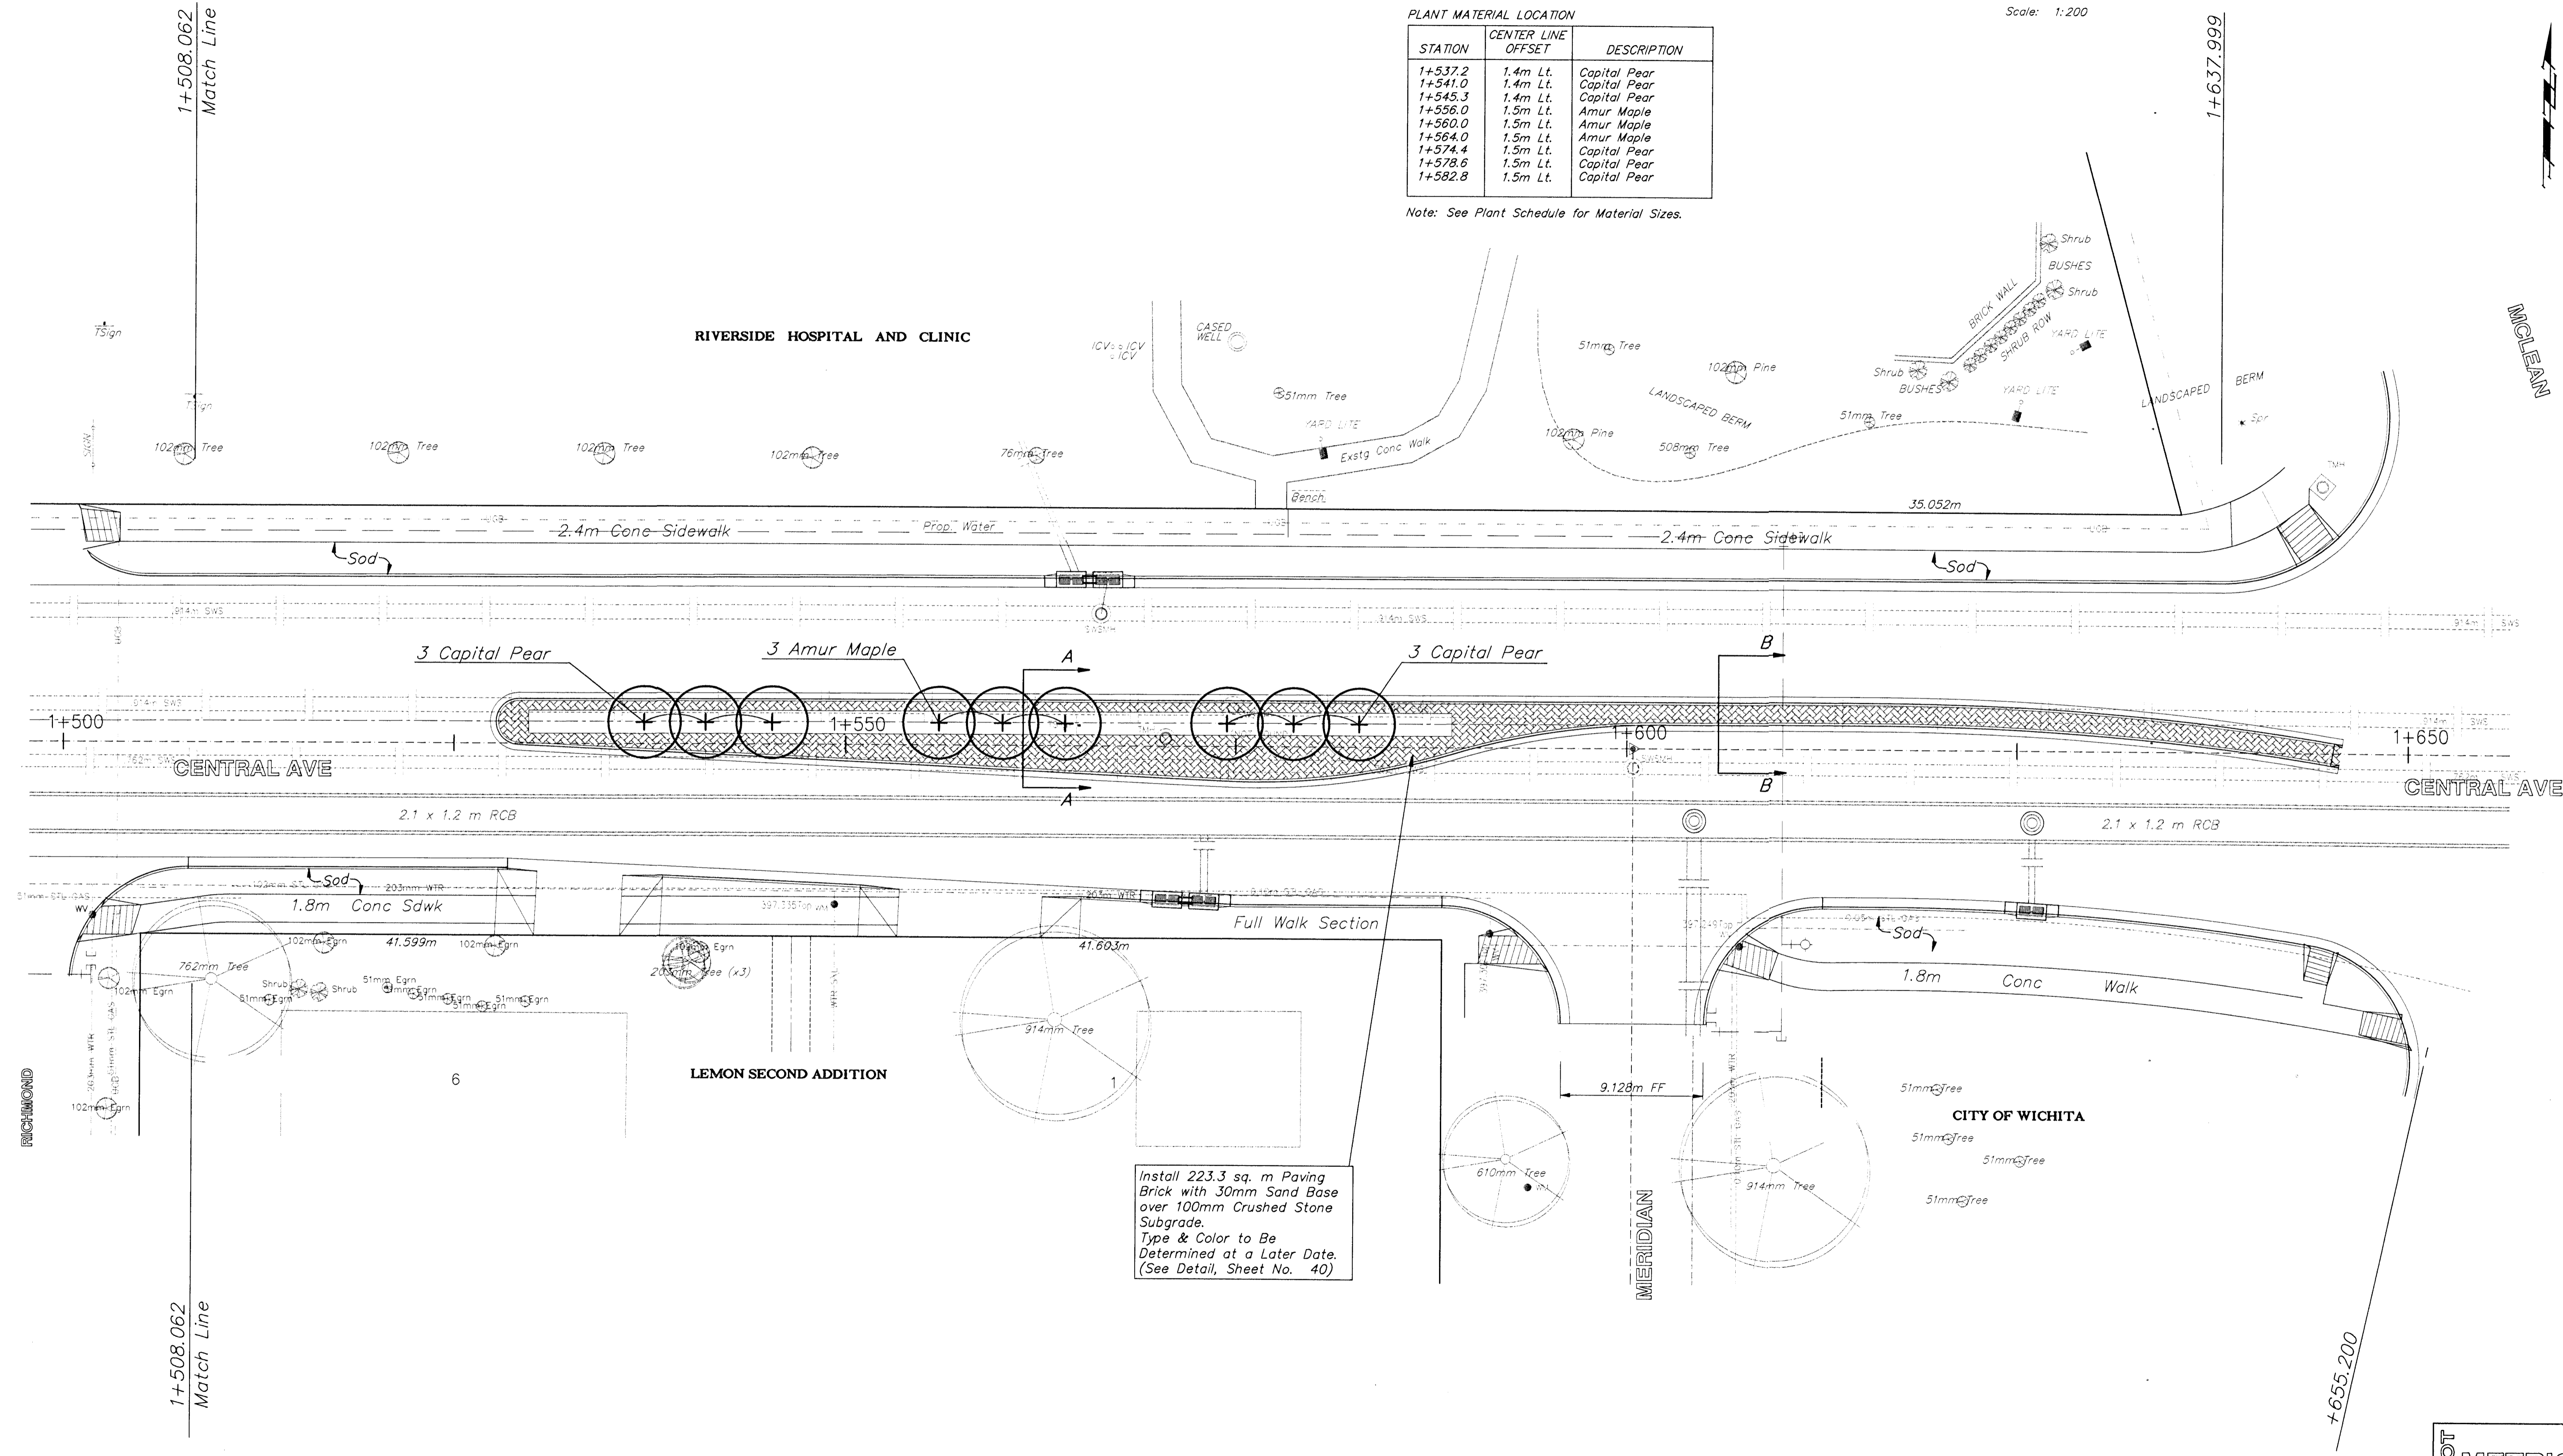

Install 223.3 sq. m Paving Brick with 30mm Sand Base over 100mm Crushed Stone Subgrade.
Type & Color to Be Determined at a Later Date.
(See Detail, Sheet No. 40)

PROJECT NUMBER 472 - 82908				
DESIGN JUL	DRAWN KWR	APPROVED PJM	DATE NOV 98	SCALE NOTED

PROJ NUMBER
95 05 E026
CREATOR
CENTZOO
SHEET NAME
LSCAPE11

**CENTRAL AVENUE
LANDSCAPING PLANS**
Sta. 1+508.082 to Sta. 1+855.200

BAUGHMAN COMPANY P. A.
ENGINEERING, SURVEYING, & PLANNING
318-282-7271 • 315 ELLIS • WICHITA, KANSAS 67211

SHEET
137
OF
202

