CYD 500


FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87 N-0303-01	2003	143	143

STATION	AREAS Square Feet		VOLUMES Cubic Yards		CUMULATIVE VOLUMES Cubic Yards	
	CUT	FILL	CUT	FILL	CUT	FILL
6+85	41.80	2.84				
			24.31	1.50	24.31	1.50
7+00	45.73	2.56				
			97.91	4.04	122.23	5.54
7+50	60.01	1.80				
			125.45	2.38	247.67	7.92
8+00	75.47	0.77				
			137.03	0.90	384.70	8.82
8+45	88.96	0.31				
			16.63	0.05	401.33	8.87
8+50	90.68	0.24				
			184.02	0.24	585.35	9.11
9+00	108.06	0.02				
			188.85	0.05	774.20	9.16
9+45	118.56	0.04				
			0.00	0.00	774.20	9.16

Quantities in these Tables have been figured by the Average End Area Method. The Quantities have not been adjusted by any factors.

Earth Work Listed in these Table Reflect Existing Surfaces (Including Pavement). Actual Quantities for Bid Summary Shall be Reduced by Removal of Pavement (Assumed Pavement Thickness of 8").

9+45

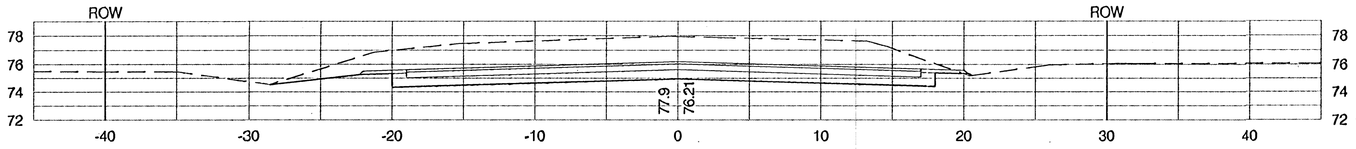

PROJECT NUMBER	SHEET NAME	ENGINEERING DIRECTORY
472-83902	XSEC 31	F:\Hydraulic_phs2\Earth

DESIGN	DRAWN	APPROVED	DATE	SCALE	BAUGHMAN NO
STAFF	TPV	JFB	Nov. 2003	1:5	99-09-B451

CAPITAL IMPROVEMENT PROJECT
55th STREET SOUTH
CROSS SECTION & EARTH WORK QUANTITIES
HYDRAULIC AVENUE PAVING - 57th STREET SOUTH TO 47th STREET SOUTH

BAUGHMAN COMPANY, P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 * 315 ELLIS * WICHITA, KANSAS 67211

SHEET 143 OF 143