


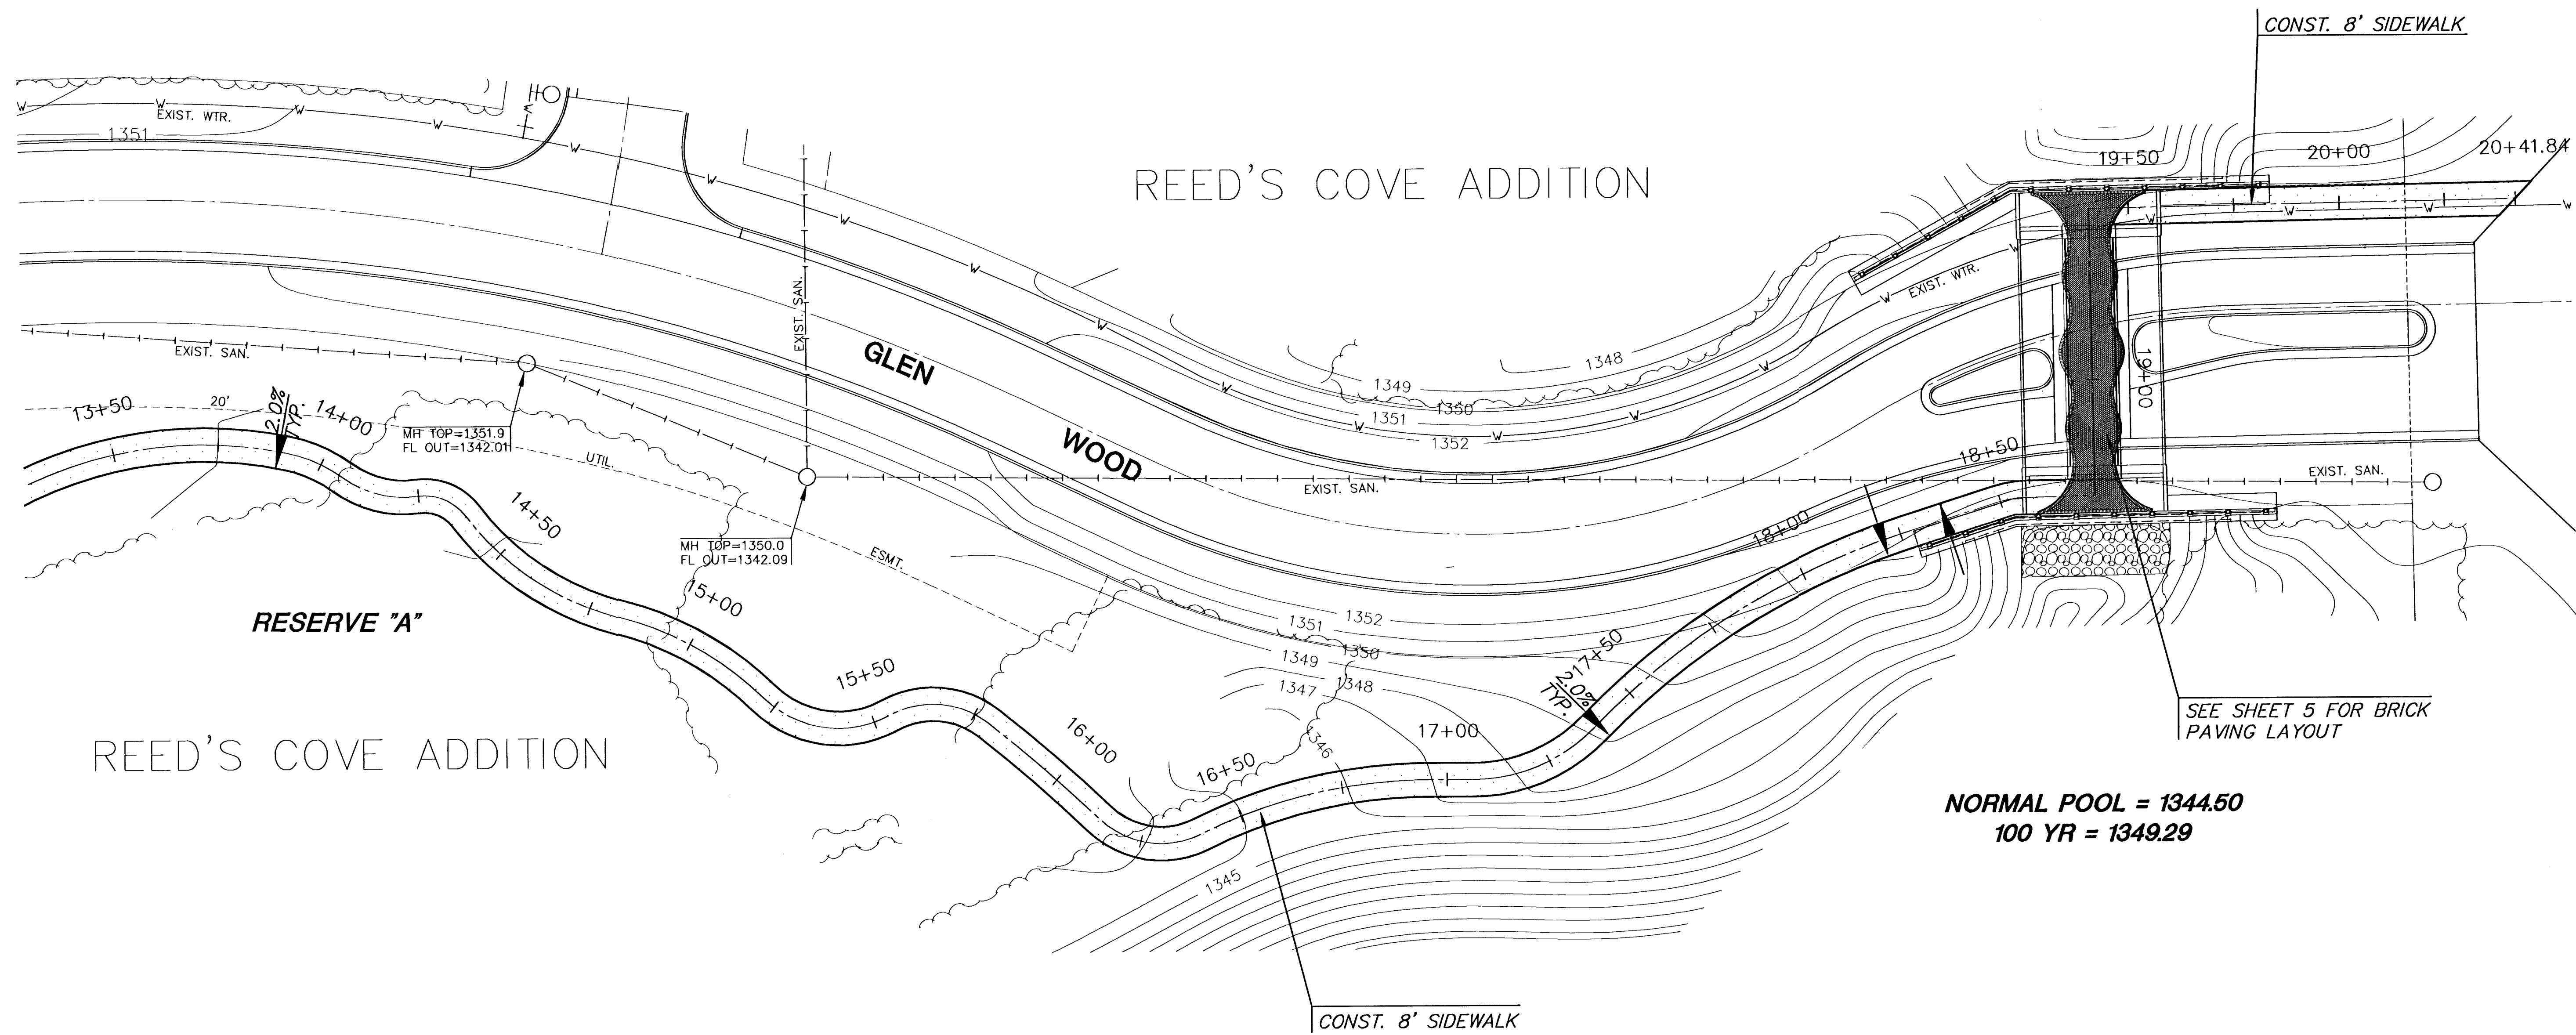

REED'S COVE ADDITION

RESERVE "A"

GLEN

WOOD



CONST. 8' SIDEWALK

CONST. 8' SIDEWALK

NORMAL POOL = 1344.50
100 YR = 1349.29

SEE SHEET 5 FOR BRICK
PAVING LAYOUT

5' SIDEWALK LENGTH = 36'
8' SIDEWALK LENGTH = 2284'
AREA = 10411 S.F.

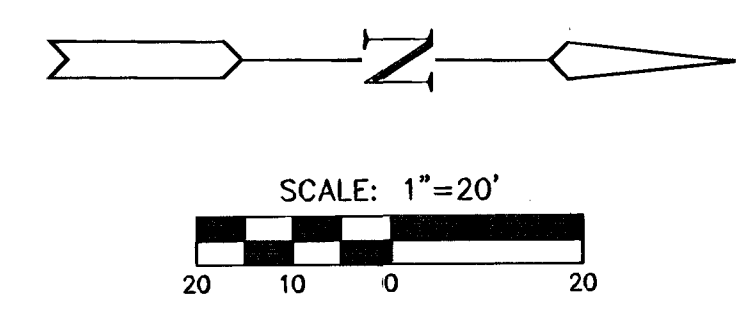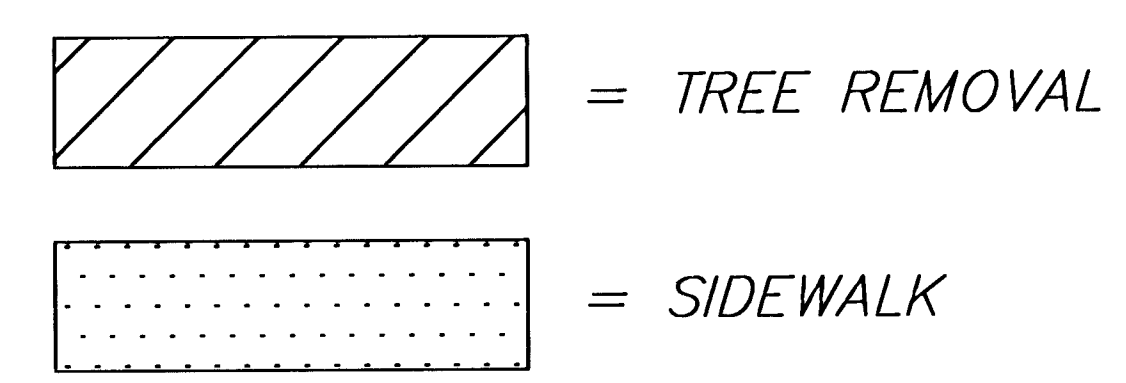

NOTES:

1. WHEN CONSTRUCTING SIDEWALK CONTRACTOR SHALL PROTECT EXISTING TREES. ANY TREE NOT MARKED WITH AN "X" THAT IS IN CONFLICT WITH CONSTRUCTION SHALL NEED ENGINEER'S APPROVAL BEFORE REMOVING. FIELD ADJUSTMENTS MAY BE MADE AT THE DIRECTION OF THE ENGINEER TO PRESERVE TREES.
2. SIDEWALK LONGITUDINAL GRADES SHALL NOT EXCEED 5.0% SLOPES EXCEPT AT RAMPS. CROSS SLOPE SHALL BE 2.0% IN DIRECTION NOTED. THE SIDEWALK ELEVATION SHALL BE CONSTRUCTED SO AS TO NOT IMPEDE OR HOLD WATER FROM RUNOFF.

H:\CIVIL\02121\DWG\PAV\PH1\02121E4

REED'S COVE ADDITION
PROJECT NAME

SIDEWALK PLAN
SHEET TITLE

DFL DESIGN BY:	DMU DRAWN BY:	GJA CHECKED BY:
JUNE 2003 DATE	02121E4 JOB NO.	12 / 34 SHEET/OF