


- BENCHMARK:**
- "□" on B/C at the N. end of the N. driveway return, 28' S. of the S. end of the SE return at the intersection of Flora and 3rd St. N. Elev.=120.38
 - "□" on SE corner of KG&E metal pole at the NW corner intersection of Flora and St. Louis. Elev.=122.85

CONTROL POINTS					
	Northing	Easting	Station	Offset	Elevation
1	5000.00	10000.00	9+20.06	29.67 Rt	119.98
2	5240.02	10000.78	10+10.08	30.16 Rt	122.75
3	5480.24	10001.07	14+50.30	30.15 Rt	121.23

NOTES:
 Top of curb Elevations shown are for a full height curb & gutter section & are shown for staking purposes. A roll type curb & gutter shall be used and the top of curb shall be 0.25' lower than plan elevation. Curbs at the intersections shall be full height.

Place Topsoil at various depth to ensure minimal 0.3% cross slope to Proposed Curb Line. Cost to supplemental Site Clearing and Restoration.

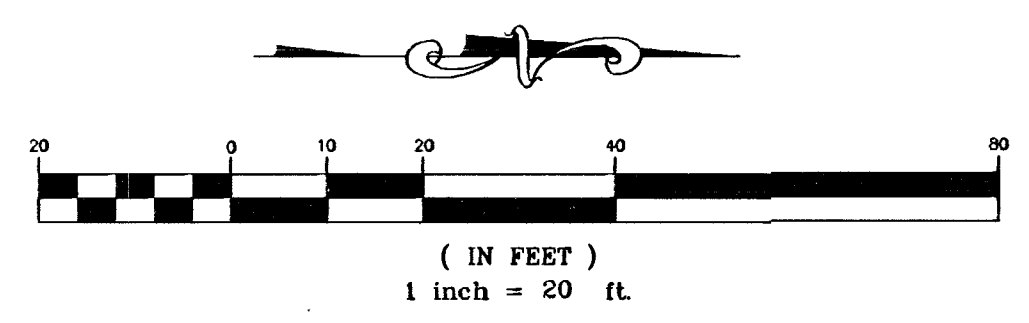

Flora St. From 3rd St. N. To St. Louis St. N.
Flora Street Improvement
 Wichita, Kansas

		PROJECT NUMBER 472-83621	
		KEM NO. 20103	FILE PVP1an1
DESIGN PB	DRAWN MK	DATE 10/02	SHEET 5
516 S. Market, Wichita, KS 67202		316/264-0242	REVISED 03/20/03