


Prescott CY Excavation (unadjusted)				Prescott CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
1+50	0.00	0.00	0.00	1+50	47.92	0.00	0.00
2+00	0.00	0.00	0.00	2+00	49.18	89.90	89.90
2+50	0.00	0.00	0.00	2+50	49.03	90.02	179.92
3+00	0.00	0.00	0.00	3+00	48.67	87.73	267.66
3+50	0.00	0.00	0.00	3+50	48.18	87.27	354.93
4+00	0.00	0.00	0.00	4+00	48.71	89.44	444.37
4+50	0.00	0.00	0.00	4+50	46.03	87.73	532.10
5+00	0.00	0.00	0.00	5+00	45.65	84.89	616.99
5+50	5.71	5.29	5.29	5+50	31.29	71.24	688.23
6+00	0.16	5.43	10.72	6+00	41.90	67.77	756.00
6+20.65	27.82	10.70	21.42	6+20.65	9.57	19.68	775.67

Prescott CY Compacted Fill (unadjusted)			
Station	Area	Volume	Total
1+50	104.50	0.00	0.00
2+00	110.63	199.20	199.20
2+50	99.49	192.47	391.67
3+00	106.16	186.15	577.82
3+50	88.42	178.13	755.95
4+00	79.20	154.96	910.91
4+50	70.97	139.05	1049.96
5+00	56.46	117.99	1167.95
5+50	0.73	52.95	1220.90
6+00	31.71	30.03	1250.93
6+20.65	0.00	12.12	1263.05



PRESCOTT

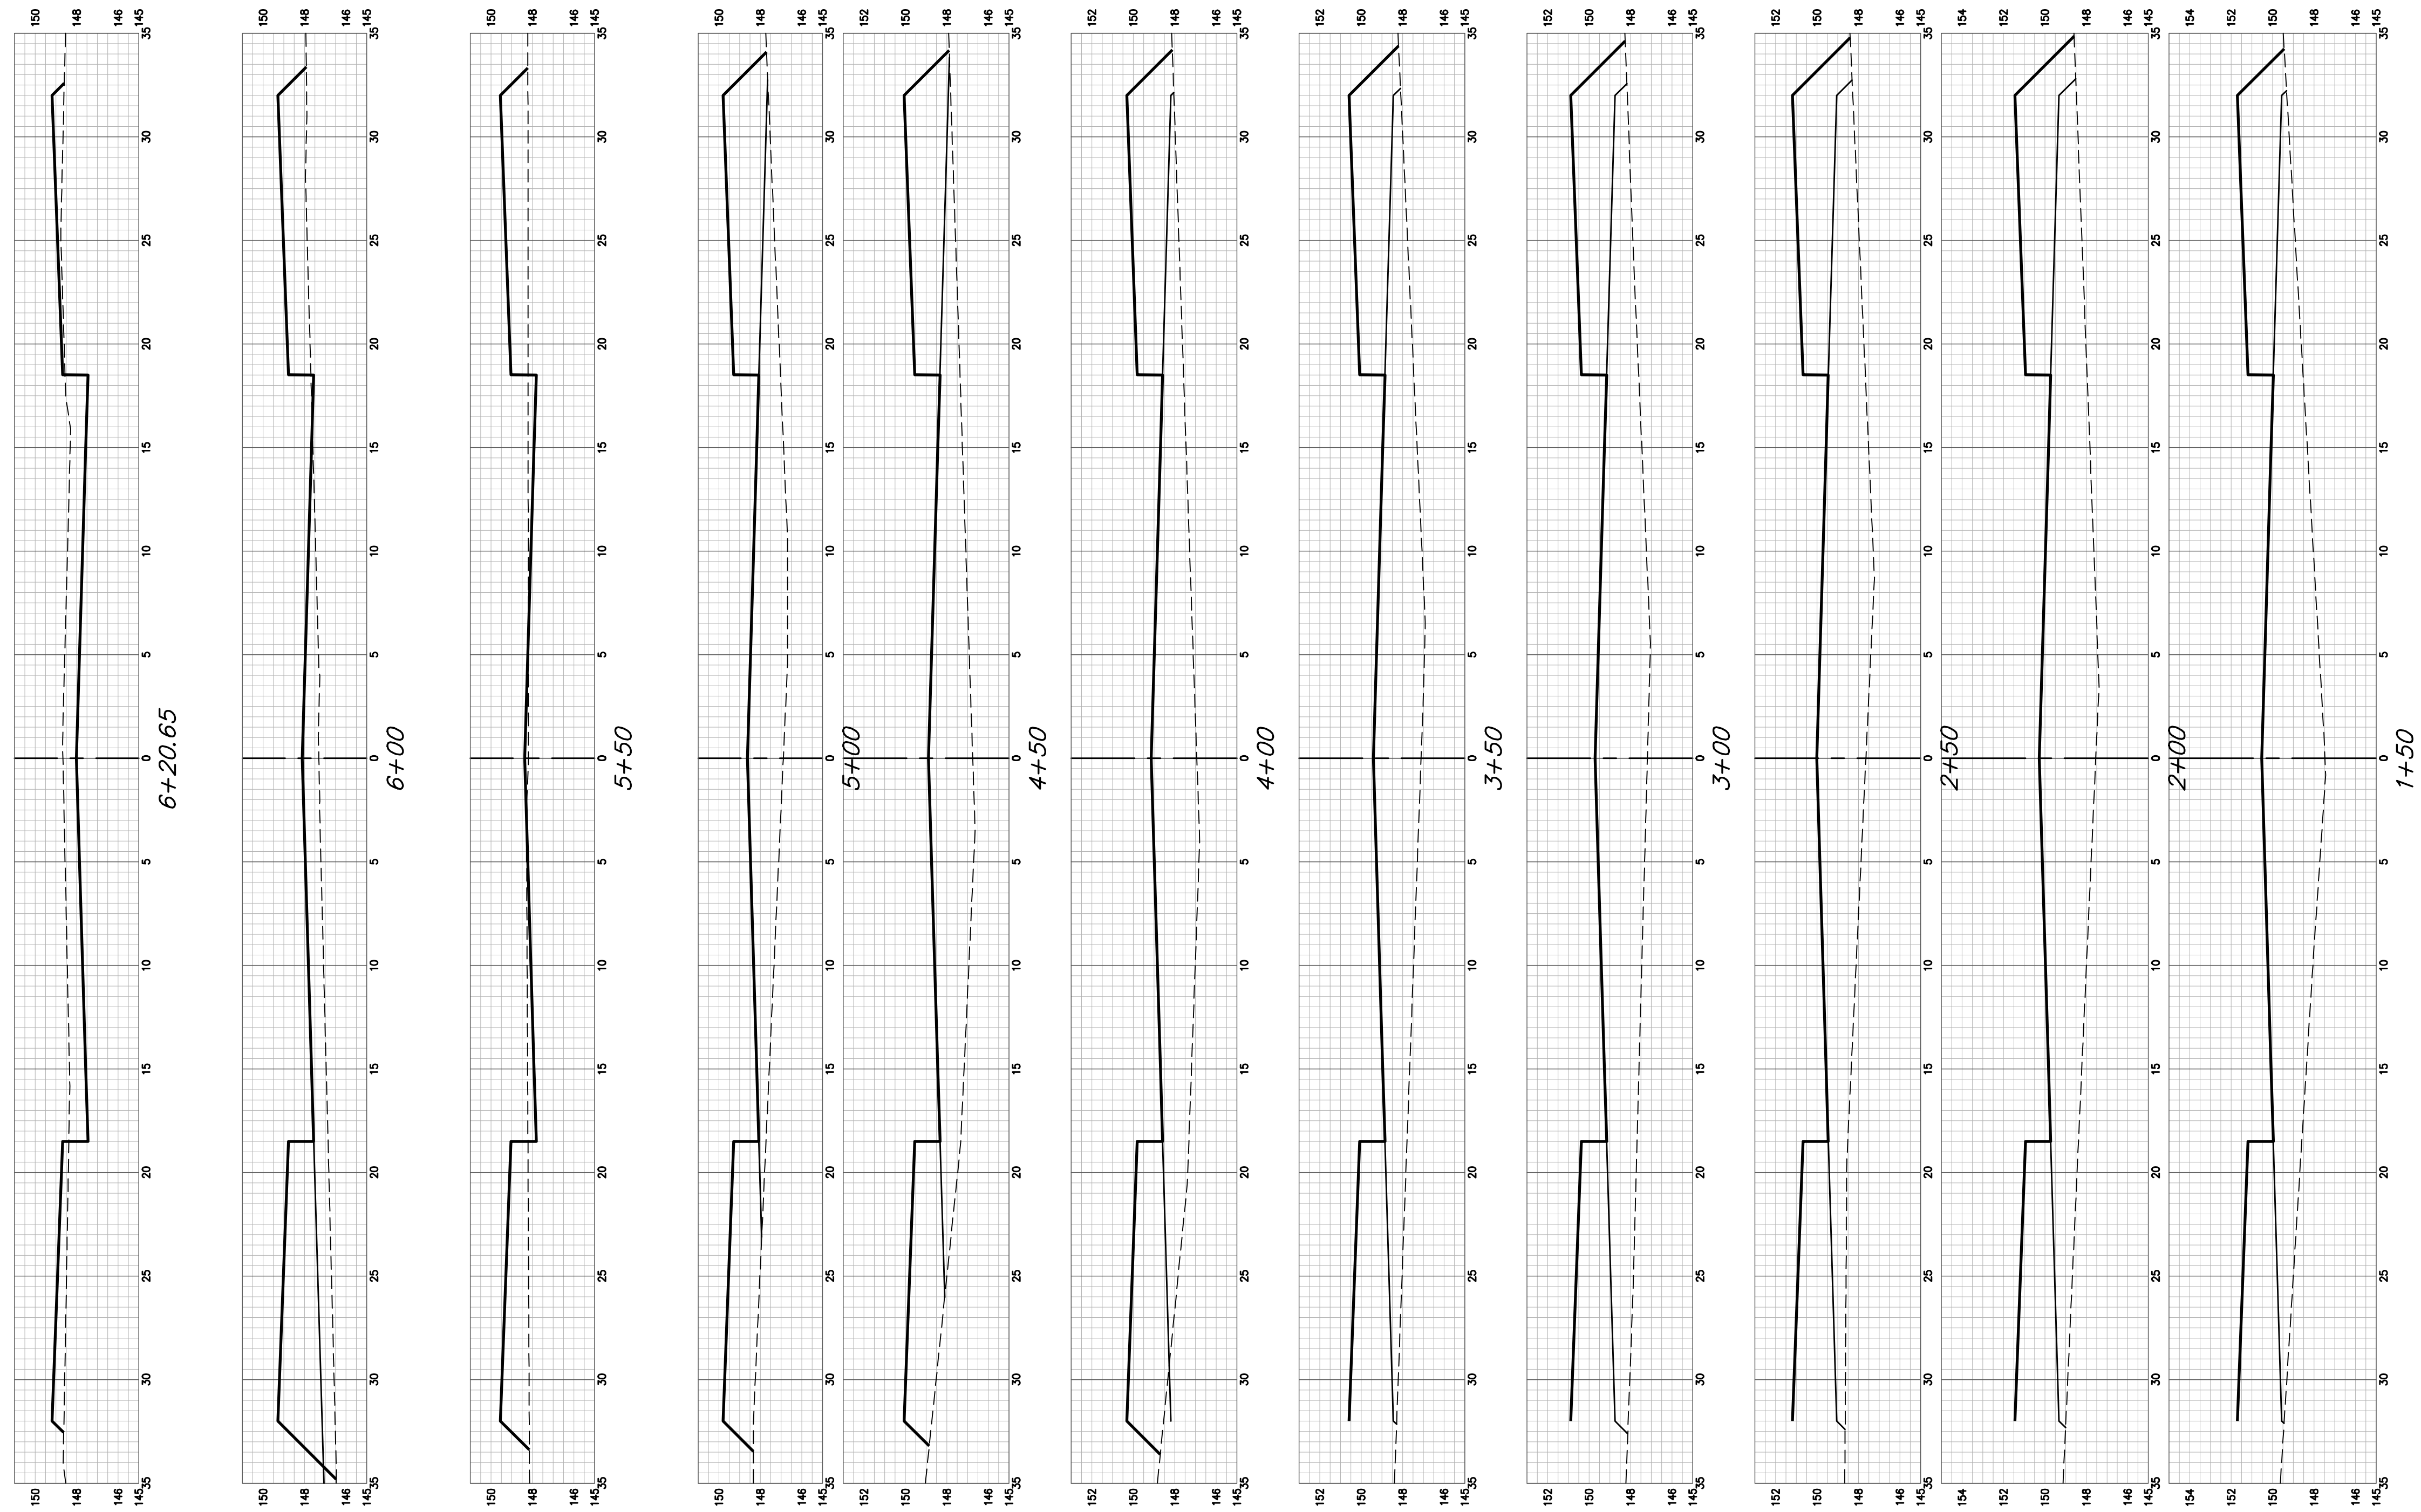