

**NOTES:**


FLAGGING OPERATIONS MAY OCCUR BETWEEN 8:30 AM AND 4:00 PM. TWO WAY TRAFFIC SHALL BE MAINTAINED OUTSIDE THOSE HOURS. NO WORK SHALL OCCUR ON GRAVEL SHOULDER OR ASPHALT ROADWAY UNLESS FLAGGERS ARE IN PLACE.

FLAGGERS SHALL HAVE APPROPRIATE MEANS OF COMMUNICATION. HAND SIGNALS, RADIOS, OR ORAL COMMUNICATIONS ARE ACCEPTABLE. FLAGGER ON LAGUNA MUST CONTROL NORTHBOUND TRAFFIC ON 143RD IF SOUTH FLAGGER IS NOT USED.

ONE LANE TRAFFIC SHALL BE MAINTAINED DURING CONSTRUCTION. BARRIERS SHOULD BE LOCATED TO PROVIDE MAXIMUM DRIVING ROOM FOR THROUGH TRAFFIC.

ALL TRAFFIC CONTROL DEVICES AND TEMPORARY PAVEMENT MARKING SHALL CONFORM TO THE LATEST EDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES," U.S. DEPT. OF TRANSPORTATION.

ALTERNATE TRAFFIC CONTROL PLANS MAY BE USED WITH THE APPROVAL OF THE ENGINEER PRIOR TO ANY LANE CLOSING.

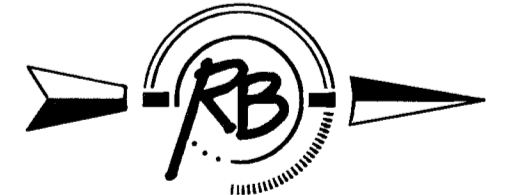

SCALE 1" = 20'

<b>Clear Creek Addition Traffic Control Plan WICHITA, KANSAS</b>			
	<b>Ruggles &amp; Bohm, P.A.</b> Engineering, Surveying, Land Planning		
	924 North Main Wichita, Kansas 67203 www.rbkansas.com	(316) 264-8008 (316) 264-4621 fax E-mail: info@rbkansas.com	DESIGN KWL DRAWN TEB REVIEW
DRAWING FILE Traffic {Traffic Control}	PROJECT NUMBER 472-83743	DATE Aug. 7, 2003	SHEET 16 OF 40