HAWTHORNE STREET PAVING & STREET IMPROVEMENTS

to serve

SHOAL CREEK 2ND ADDITION

CITY OF WICHITA, KANSAS

Neil Cable, P.E. City Engineer

Hawthorne St. from the south line of Siefkes, south to the north line of Hawthorne St.
Hawthorne St. from the east line of Turnberry, east and south to the north line of Whitewood St.
Turnberry from the north line of Lot 14, Block A north to the south line of Lot 20, Block A
Whitewood from the east line of Turnberry to the west line of Hawthorne St.

Project Number

472-83820

O.C.A. Number

765821

GENERAL NOTES:

1. Contractor will be required to provide notice to utility companies a minimum of twenty-four (24) hours prior to any excavation, as follows:

   Kansas One-Call 687-2470

   The Contractor must notify the following in case of an emergency:

Cox Communications	262-4270
Kansas Gas Service	1-888-482-4950
Westar Energy	383-8650
Aquila Energy	1-800-303-0357
Southwestern Bell	268-2245
City of Wichita Water Dept.	268-4563
City of Wichita Sewer Maint.	268-4024
City of Wichita Storm Sewer Maint.	268-4090
City of Wichita Traffic Maint.	268-4034
Conoco Pipeline Co.	1-800-231-2551
Southern Star Pipeline Co.	529-5600
Phillips Pipeline Co.	1-800-766-8230

2. Utility service lines, poles, valve boxes, meters, and etcetera are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The Contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
3. Rubble from the removal of miscellaneous structures and excess excavation which is to be wasted shall be disposed of on sites to be provided by the Contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Locations, in the opinion of the Engineer, that will leave an unsightly appearance will not be approved. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain would require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps. of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.
4. Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the Contractor with the Engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.
5. The Contractor shall give all property owners and/or tenants of developed property abutting the construction of this project a minimum of ten (10) days advance notice prior to start of construction.
6. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor in accordance with state laws
7. All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on-site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on-site engineer until project is accepted by City of Wichita. Maintenance and/or replacement of erosion control measures to be paid by L.S. bid item "Erosion Control BMP's."
8. A saw cut of at least one-half the depth of existing surface courses or one-fourth the depth of the existing total pavement thickness shall be provided at locations where proposed construction abuts as existing surface course or pavement for which partial removal of that surface or pavement is required. Sawed joint to facilitate removal within three (3) feet of existing joints will not be permitted and for such instances the limits of removal shall extend to the existing joint. Such saw cuts will not be paid for directly and this cost shall be considered as subsidiary to the removal of the surface or pavement.
9. The contractor shall adjust valve boxes as necessary to match proposed grade. Cost to be included in bid item, "Site Clearing & Restoration."
10. All excess excavation shall remain on-site and shall be spread or stockpiled at an area determined by the engineer.
11. All areas within street r/w and street easements disturbed during construction shall be seeded, mulched, and fertilized as follows (Permanent Seeding):

    Seed: Kansas Premium Fescue Blend: 8 lbs./1000 sq. ft.
    Mulch: Prairie Hay: 2 tons/acre
    Fertilizer: 12-24-12: 850 lbs./acre

    All other areas disturbed during construction shall be seeded at 300 lbs./acre with Rye Grass immediately following construction in that area. Contractor shall prepare ground per City Specifications.


    All costs associated with seeding, mulching, and fertilizing shall be included in bid item "Project Seeding." All seeding operations shall conform to City of Wichita Standard Specifications.

Project Earthwork Totals
Excavation = 1934 C.Y.
Loose Fill = 1440 C.Y.
Compacted Fill = 547 C.Y.
Contractor Borrow = 549 C.Y.

Total Project Length
1500 L.F. = 0.28 Miles

Benefit District:

Proposed Streets:

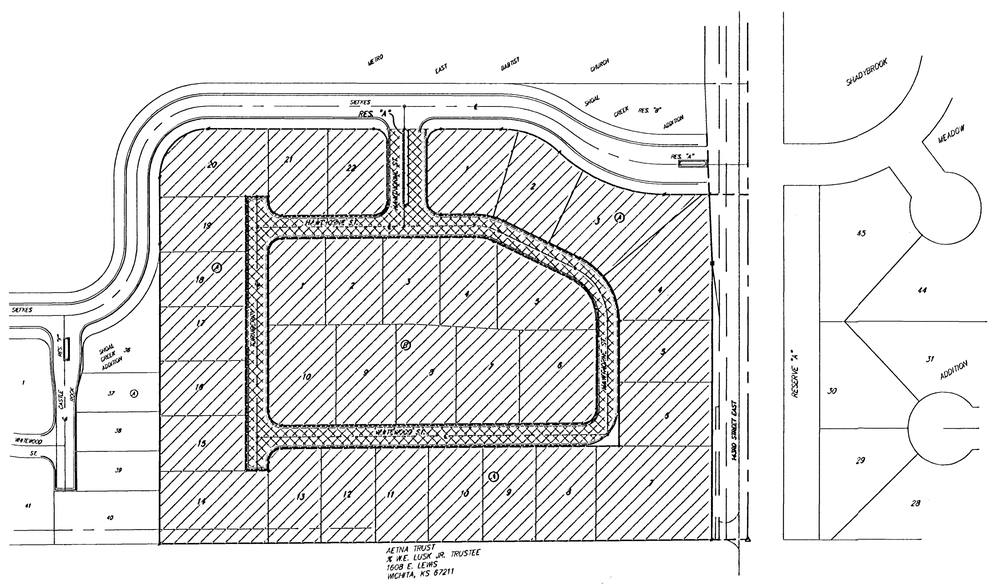

Scale: 1" = 100'


Benchmarks

"□" Cut on Top of Curb, North Side Siefkes, NW of Center Line of Siefkes Ct., Shadybrook Meadow Addition.
Elev. = 135.19 City Datum
1322.59 MSL

"X" Cut in Sidewalk North R/W of Siefkes, 135' East of the C.L. of Hawthorne.
Elev. = 142.94 City Datum
1330.34 MSL

Sheet Index

Title Sheet	1
29' Pavement Detail	2
Sign Detail	3
Entrance Details	4
Hawthorne Street	5-7
Whitewood St.	8
Turnberry Street	9
Erosion Control Plan	10
Erosion Control Details	11-14
Earthwork Cross Sections	15-19
Copy of Plat	20

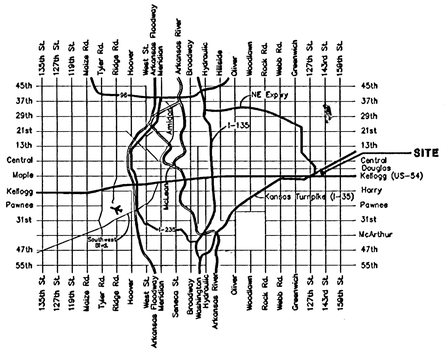

Vicinity Map



October 2003

BAUGHMAN COMPANY P.A.
ENGINEERING, SURVEYING, & PLANNING
316-262-7271 • 315 ELLIS • WICHITA, KANSAS 67211