


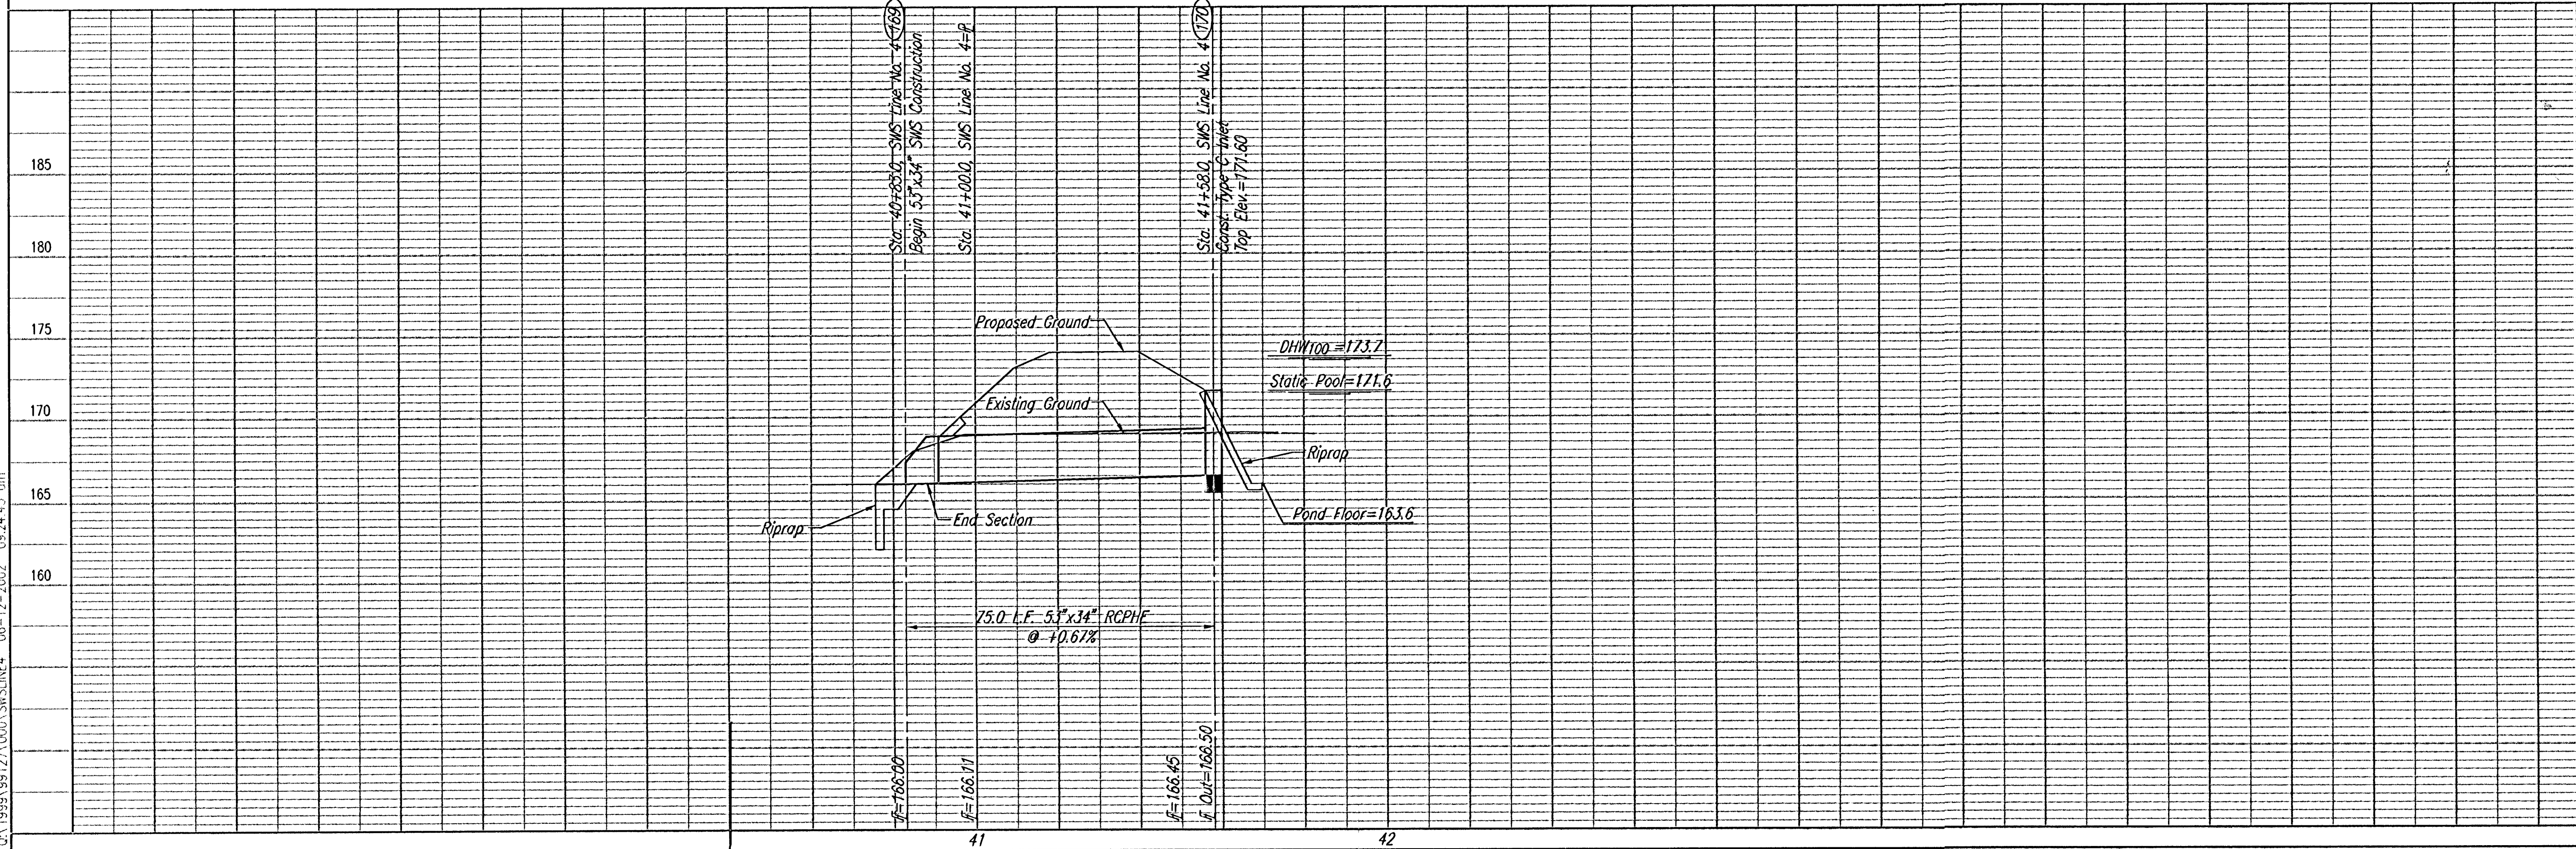

① Removal to be considered part of the bid item "Site Clearing".

Sta. 40+83.0, SWS Line No. 4
Begin 53"x34" SWS Construction
Install 75.0 L.F. 53"x34" RCPHE (SW)
(Including End Section)

Remove Conc. Ditch
Lining to Joint ①

Install 56 S.Y.
Light Stone Riprap
See Sh. No. 21

Sta. 41+58.0, SWS Line No. 4
Const. Type C Inlet
L=7'-6", W=4'-6", H=6'-6"
Top Elev.=171.60
See Sh. No. 27

RES. "E"

Install 21 S.Y.
Light Stone Riprap
See Sh. No. 21

Note: Contractor shall Construct Clay Backfill (Plug) from
SWS Sta. 41+40 to Sta. 41+58. No Granular
Backfill shall be allowed in this area. The Top 4"
of fill above Static Pool may be Topsoil. This
work to be subsidiary to 53"x34" RCPHE.

SCALE: 1"=20'

900 COORDINATE POINT NUMBER
SEE SH. NO. 13 FOR COORDINATES

SWS LINE NO. 4
STA. 40+83.0 TO STA. 41+58.0

Professional Engineering Consultants, P.A.
303 S. TOPEKA • WICHITA, KANSAS 67202
316-262-2691 • FAX 316-262-3003

Designed by
Drawn by

Sheet 16 of 60