


CURVE TABLE					
$\Delta = 92^{\circ}17'57''$ R = 200.00' T = 208.19' L = 322.18' LC = 288.46'					
CURVE DATA BASED ON CENTERLINE $\Delta / 2 = 46^{\circ}08'58''$					
CHORD LENGTH					
STATION	ARC	8' Off LCB	8' Off RCB	DEFLECTION	TOTAL DEFLECTION
9+46.38	-	-	-	00'00'00"	00'00'00"
9+75.00	28.82'	31.74'	25.45'	04'05'58"	04'05'58"
10+00.00	25.00'	27.73'	22.24'	03'34'52"	07'40'50"
10+25.00	25.00'	27.73'	22.24'	03'34'52"	11'15'41"
10+50.00	25.00'	27.73'	22.24'	03'34'52"	14'50'33"
10+75.00	25.00'	27.73'	22.24'	03'34'52"	18'25'24"
11+00.00	25.00'	27.73'	22.24'	03'34'52"	22'00'16"
11+25.00	25.00'	27.73'	22.24'	03'34'52"	25'35'08"
11+50.00	25.00'	27.73'	22.24'	03'34'52"	29'09'59"
11+75.00	25.00'	27.73'	22.24'	03'34'52"	32'44'51"
12+00.00	25.00'	27.73'	22.24'	03'34'52"	36'19'42"
12+25.00	25.00'	27.73'	22.24'	03'34'52"	39'54'34"
12+50.00	25.00'	27.73'	22.24'	03'34'52"	43'29'25"
12+75.00	25.00'	27.73'	22.24'	03'34'52"	46'08'58"
12+88.56	18.58'	20.60'	18.52'	02'39'33"	48'08'58"
Def/Ft = 8.59437 Min.					

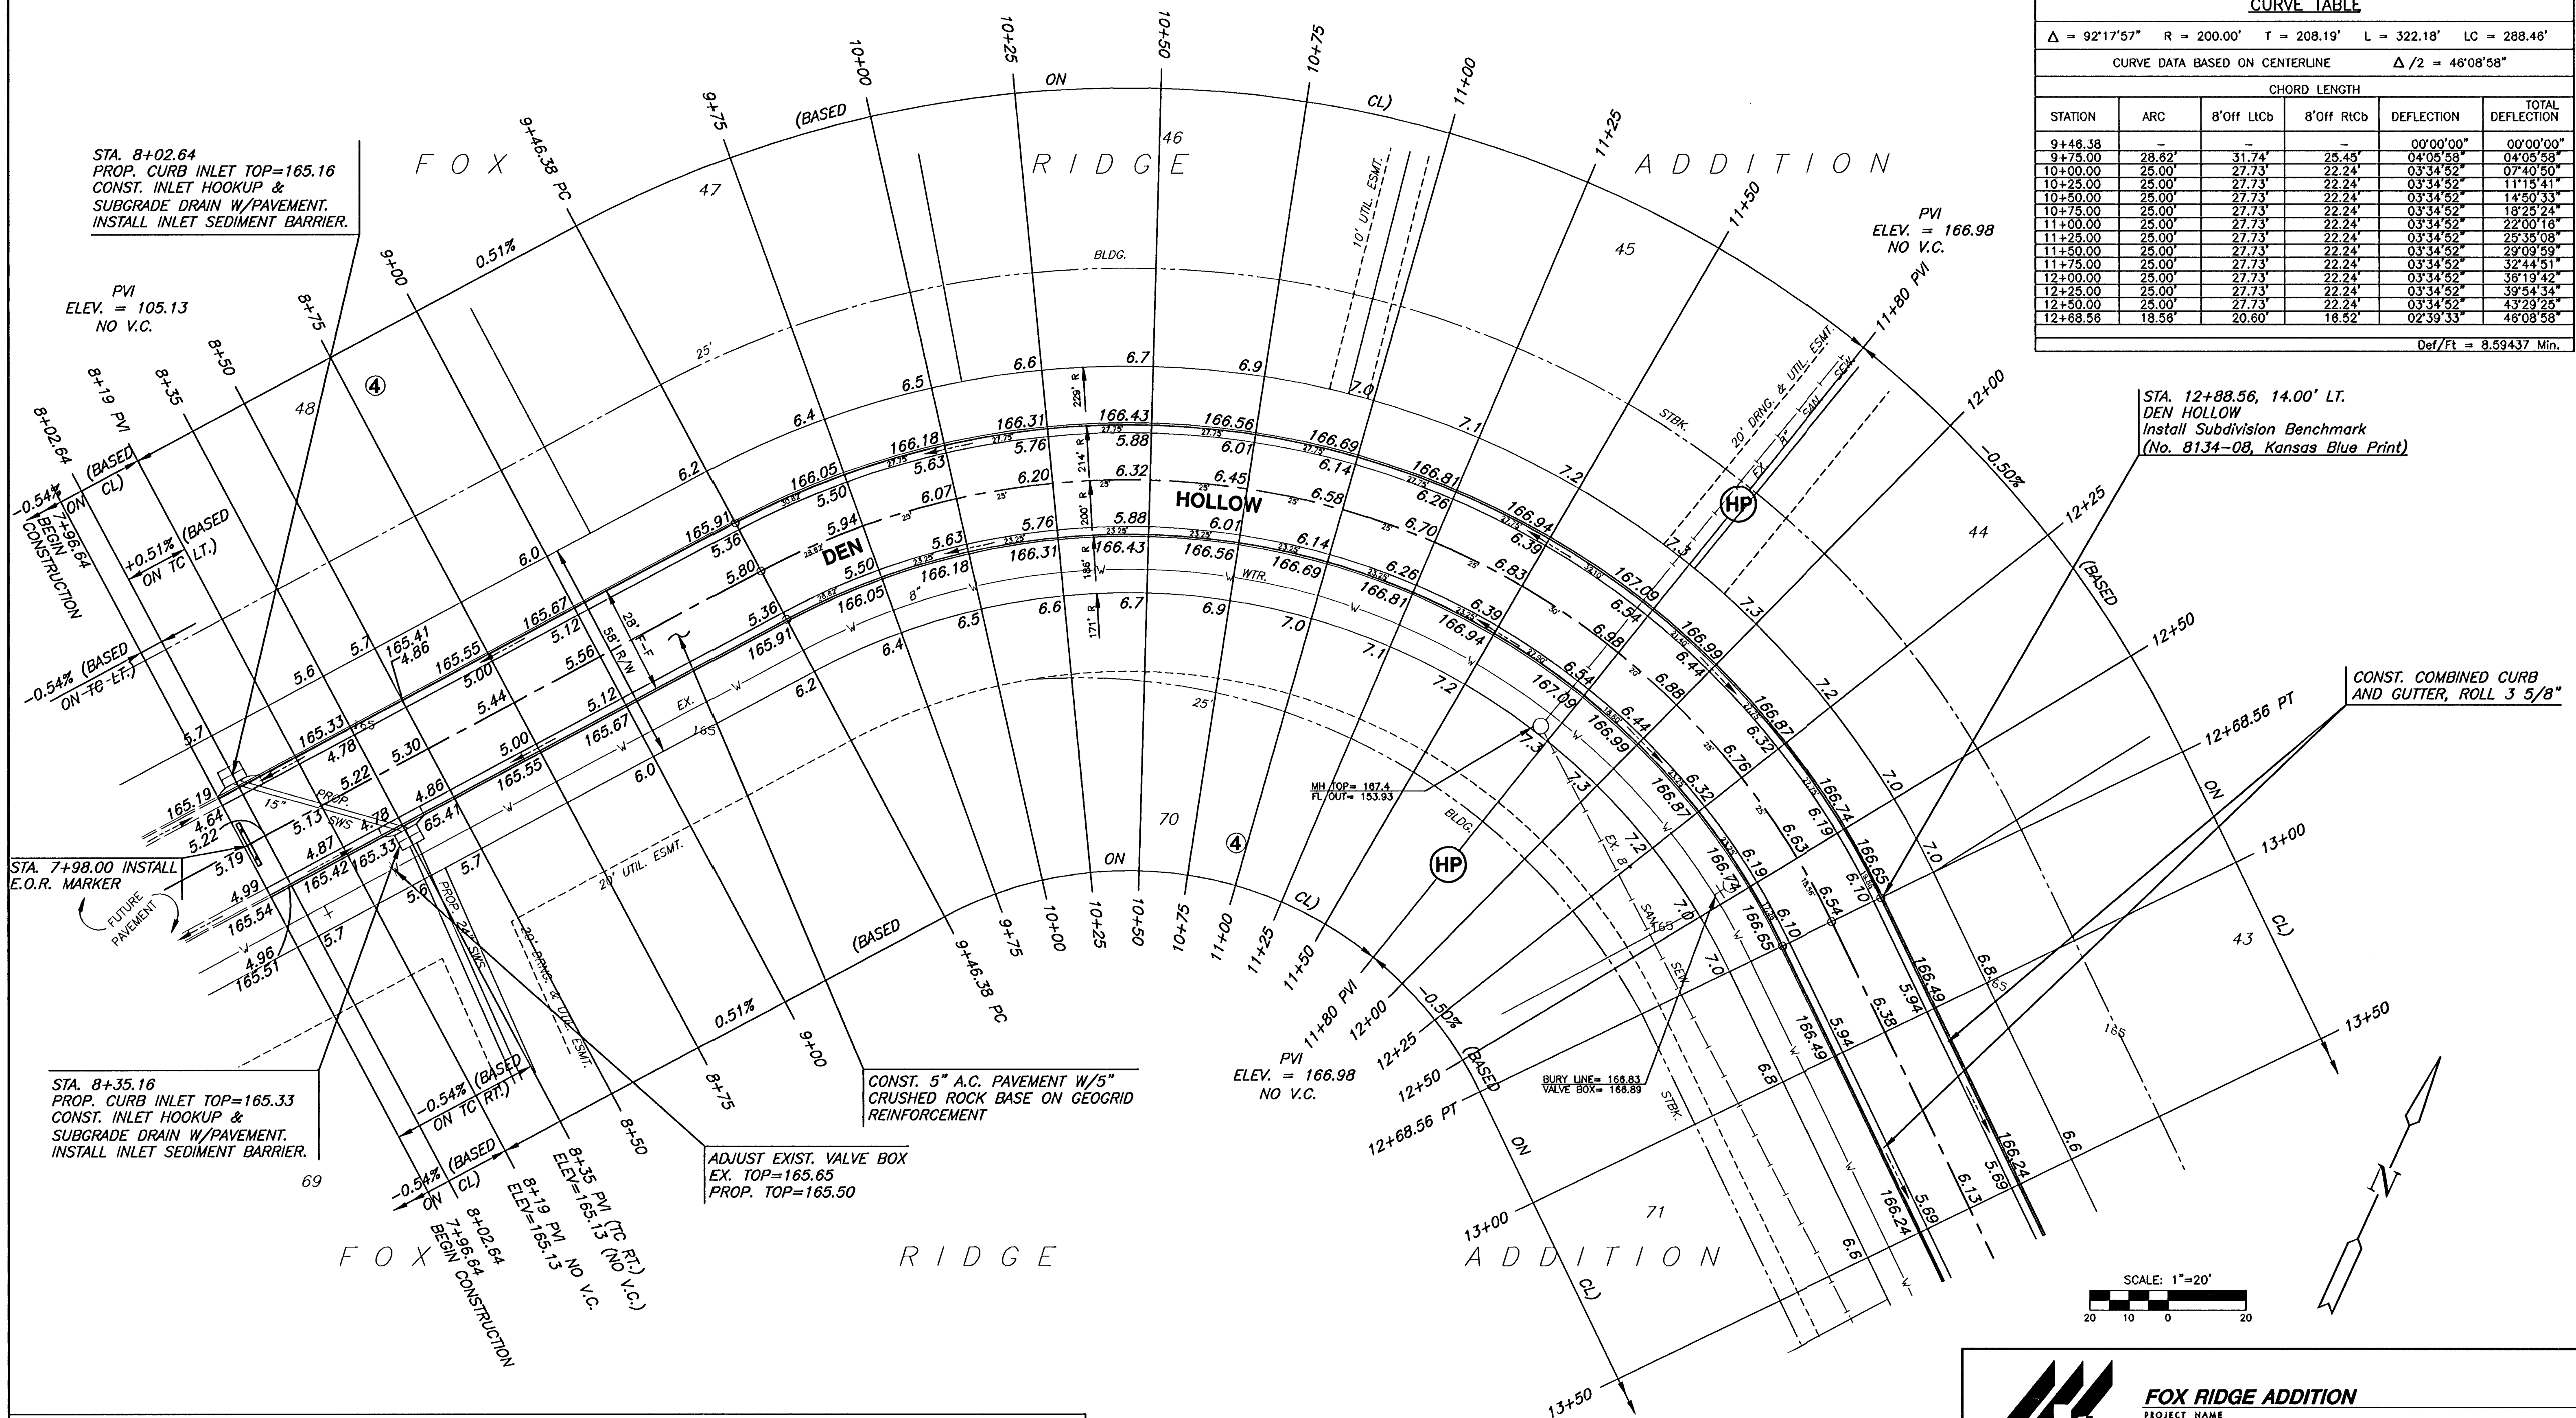

SUBDIVISION BENCH MARKS				
NO.	STREET AND STATION	FROM CL	DESCRIPTION	ELEVATIONS
1	DEN HOLLOW, STA. 12+88.56	14.0' LT	TOP OF CURB AT P.T., DEN HOLLOW	
2	DEN HOLLOW, STA. 13+18.91		TOP OF CURB AT END OF CURB CONSTRUCTION	

NOTE: CONTRACTOR SHALL INSTALL SUBDIVISION BENCH MARKS ("FLAT SURVEY MARKERS NO. 8134-08 3" TOP DIAMETER" PROVIDED BY KANSAS BLUE PRINT CO., INC.) COSTS TO BE CONSIDERED SUBSIDIARY TO CONSTRUCTION OF COMBINED CURB AND GUTTER.

LEGEND

+ STREET SIGN & SIGN LOCATION
(SEE SIGN ASSEMBLY TABLE
FOR TYPE & STATION OF SIGN)

MKEC
ENGINEERING
CONSULTANTS
411 N. WEBB ROAD
WICHITA, KS. 67204
316 - 684 - 9600

FOX RIDGE ADDITION
PROJECT NAME

DEN HOLLOW - PHASE 3
SHEET TITLE

DESIGN BY: **DM** DRAWN BY: **DK** CHECKED BY: **DK**

DATE: **SEPTEMBER 2003** JOB NO.: **99118E1** SHEET/OF: **6 / 24**